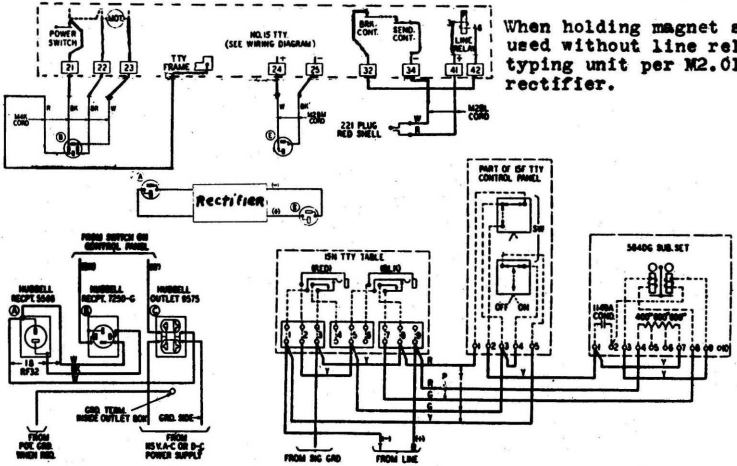

When holding magnet selector is used without line relay modify typing unit per M2.01 and omit rectifier.

PLANS USED	
LS 2.28	M2.05
P 5.01	M2.06
PM 4.03	
PS 1.01	

AC OPERATION - POWER CONNECTIONS AS SHOWN ABOVE.

DC OPERATION - RECTIFIER IS OMITTED AND POWER CONNECTIONS TO TTY ARE AS SHOWN BELOW.

NOTE: WHEN USED WITH NO. 5 OR 3A SWITCHBOARDS WITH AUTOMATIC FLASHING RECALL MODIFY TTY PER M2.05 & M2.06 FOR 60 MIL OPERATION



15N TABLE - NEG. GROUNDED OR NON GROUNDED 115 V. D-C - SWITCH MOTOR CONTROL



15N TABLE - POS. GROUNDED 115 V. D-C - SWITCH MOTOR CONTROL

NO. 15 TTY - 15 N TABLE WITH 15 F CONTROL PANEL.

LOCAL ATTENDED TWX SERVICE TO NO. 1, 5 & 3A SWITCHBOARDS WITH AUTOMATIC FLASHING RECALL.