
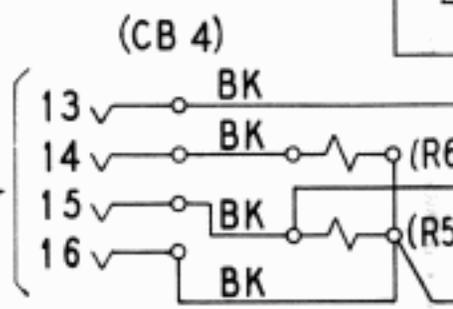
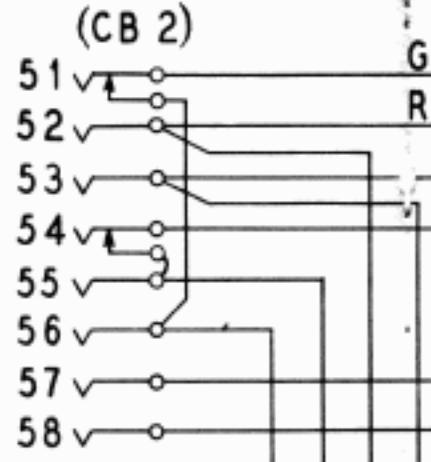


15 TYPE PERF-TRANS. NO CHANGES
IN WIRING OTHER THAN SHOWN
(REFER TO FIG.1 BSP P38.322)

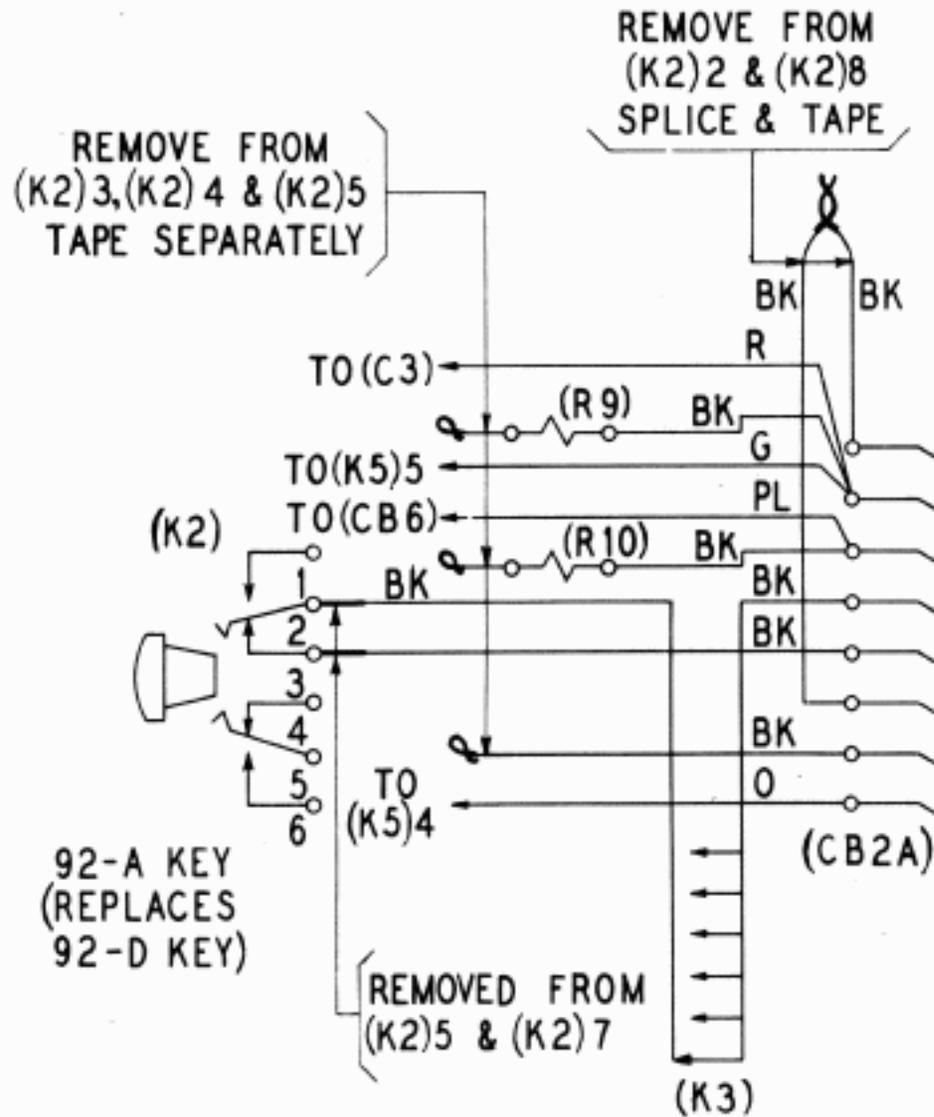


NOTE-ARRANGE TRAN-DIST START MAGNET FOR DC OPERATION i.e. REMOVE STRAP FROM (R4)

OPERATING FEATURES

1. UNSHIFT ON "LETTERS" ONLY.
2. "BELL ON BLANK."
3. APOSTROPHE ON UPPER CASE J AND S.
4. SEND-RECEIVE-BREAK KEY INEFFECTIVE.
5. "BREAK" TO BE SENT BY A NON-LOCKING KEY WHICH REPLACES THE NORMAL LINE-TEST KEY.
6. NEUTRAL SENDING, POLAR RECEIVING.

NO CHANGES
IN MOTOR CIRCUIT

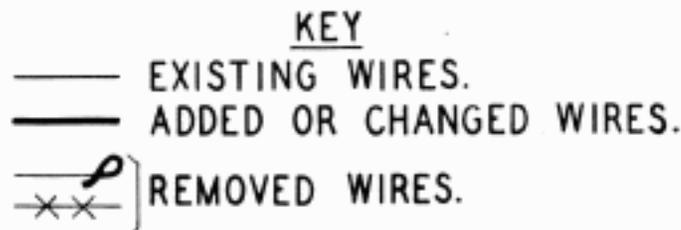


W.C. Gardner City


BELL SYSTEM PRACTICES
TELETYPEWRITER STATION
INSTALLATION AND MAINTENANCE
REPRODUCED FROM DWG. 20720-106

SECTION P90.917
ISSUE C APRIL 1944
LONG LINES DEPT.


Dist. Class. 602.05AC

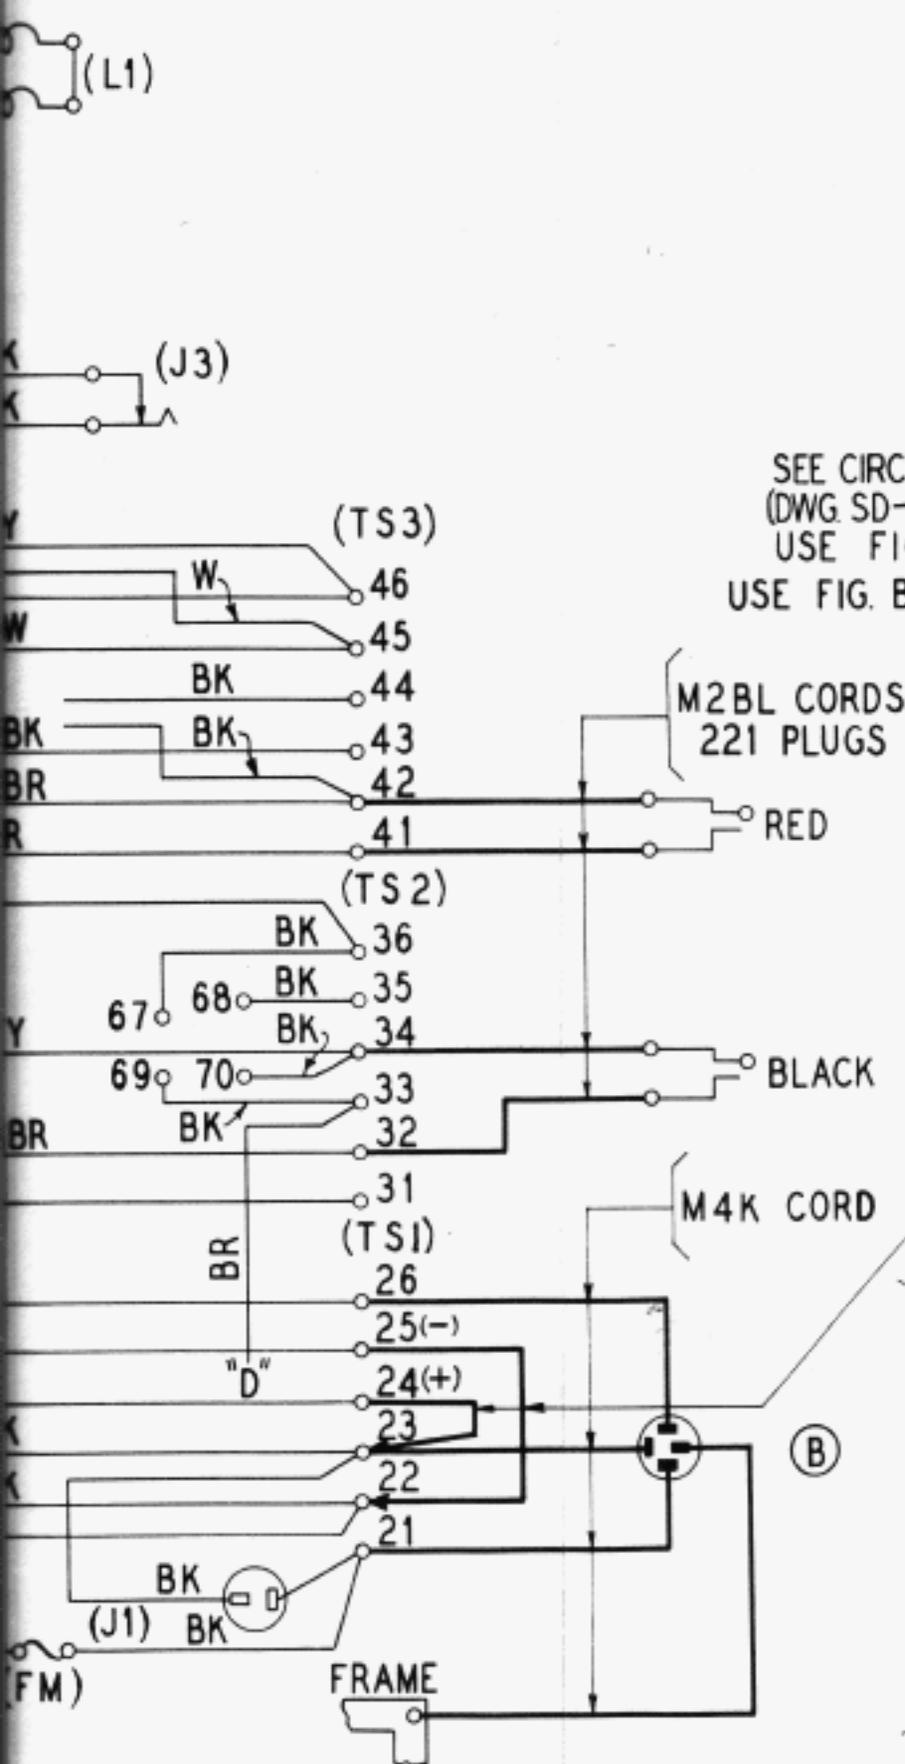

SEE CIRCUIT LABEL
(DWG. SD-64052-81)
USE FIG. A FOR AC
USE FIG. B OR C FOR DC

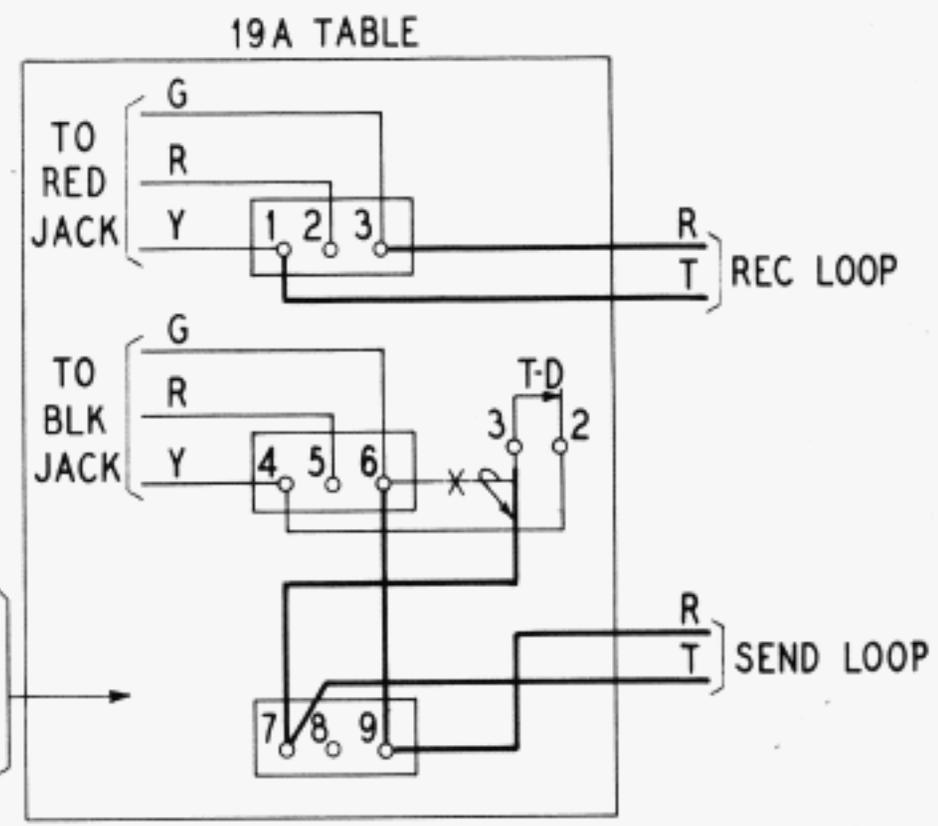

STRAPS SHOWN FOR POSITIVE
GROUNDED. INTERCHANGE FOR
NEGATIVE GROUNDED OR NON-
GROUNDED.
POWER CONNECTIONS FOR DC

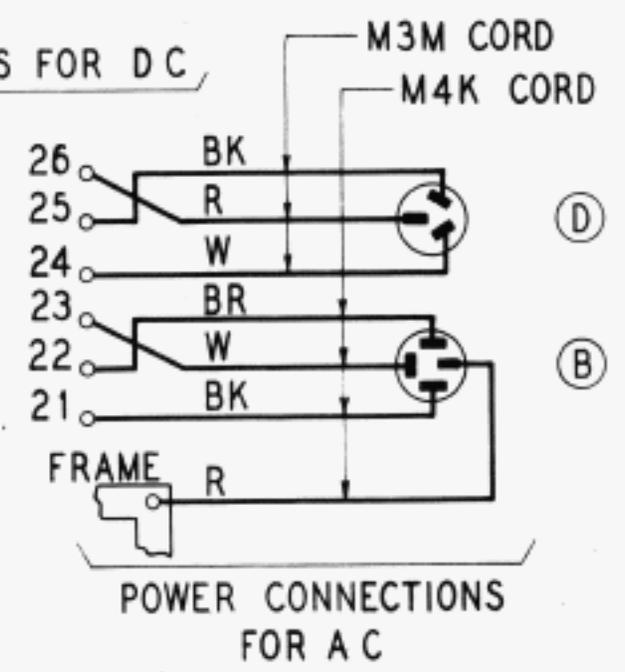

TELETYPEWRITER SYSTEMS
CIRCUIT ARRANGEMENT AND
OPERATING FEATURES OF
19A TTY SET (15A BASE) AS USED FOR
PRESS ASSOCIATION INC. TTY SERVICE
AC OR DC COMMERCIAL POWER.