

FIG. A
MODIFIED PLS-TWX KEY
(COMBINING PART A OF 479 FR. KEY AND PART D OF 479 BT. KEY (REFER TO CIRCUIT LABEL))
REQUIRED ONLY FOR I, IA, & 3C BOARDS

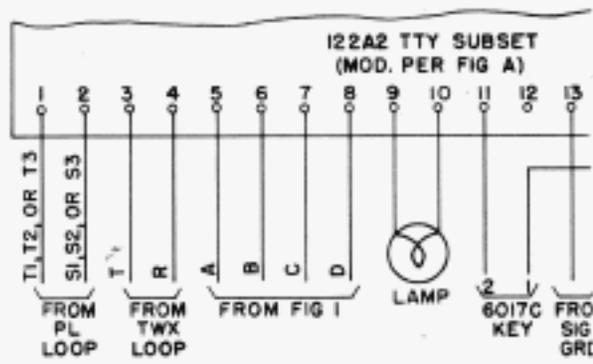
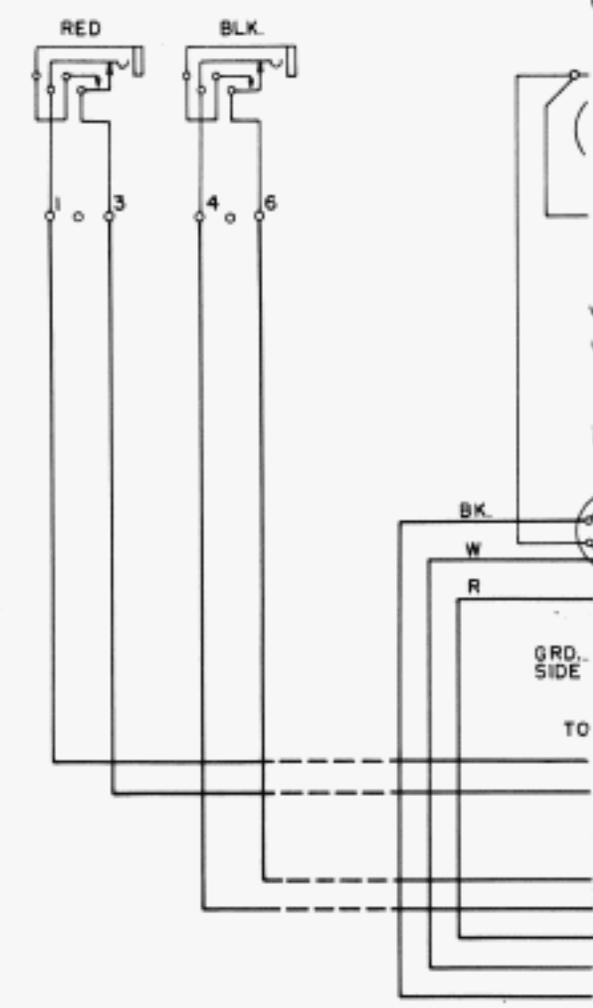


FIG. B
CONNECTIONS FOR USE WITH I, IA, & 3C BOARDS (SEE PLAN LS125)

15 TYPING UNIT
 15 BASE
 15 REF. TRANS.

APPL PLAN M2.06
 M2.16
 M2.18
 M2.19


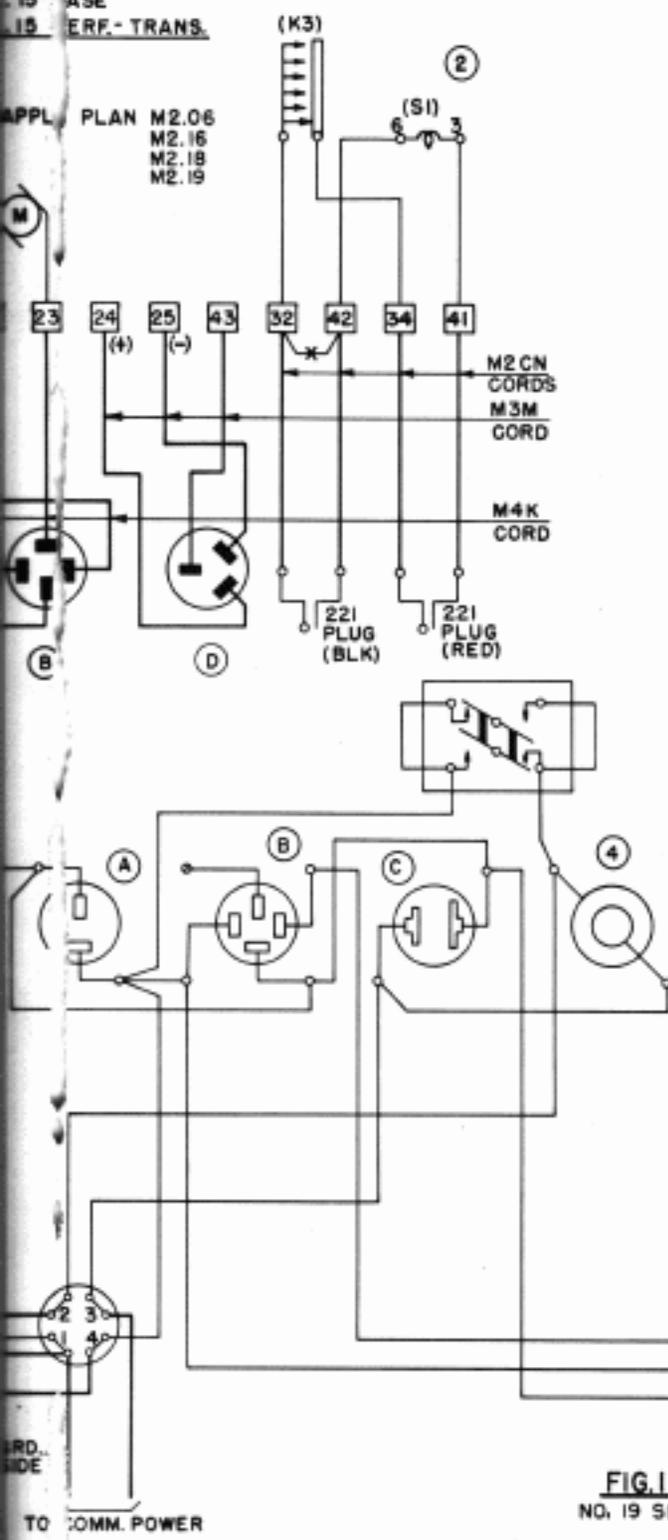


FIG. 1
 NO. 19 SET

19A TABLE

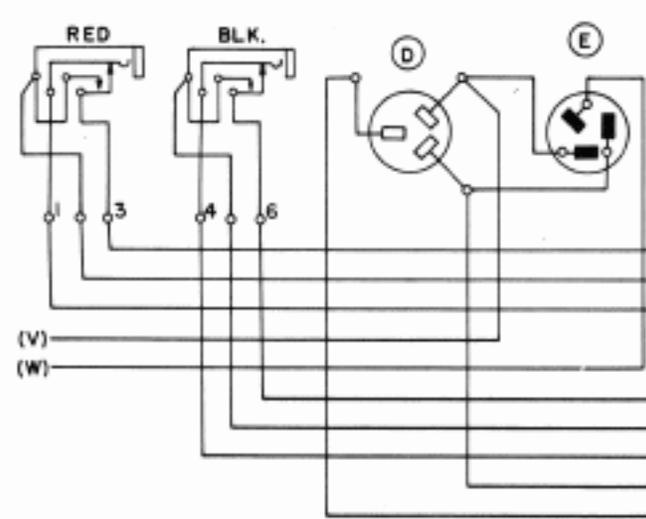

389A-3 OR 404B-9
 JACK
 (REQUIRED ONLY
 FOR 1, 1A & 3C
 BOARDS)
 (SEE PLAN SA 6.09)

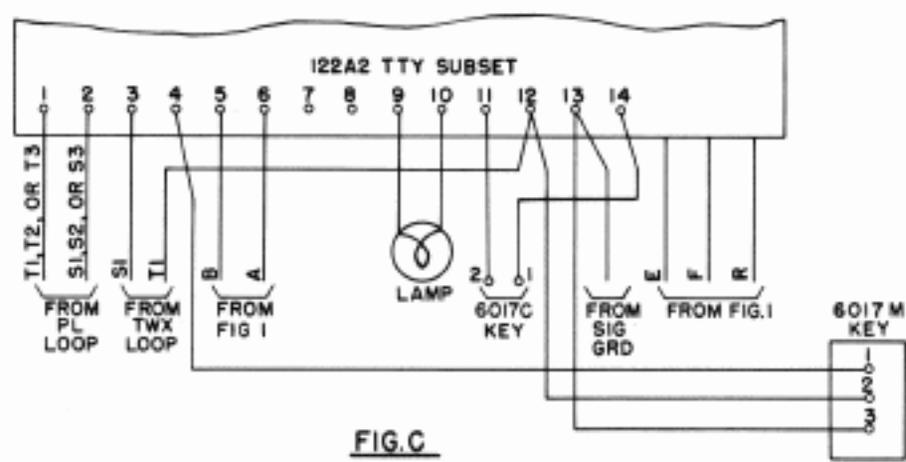
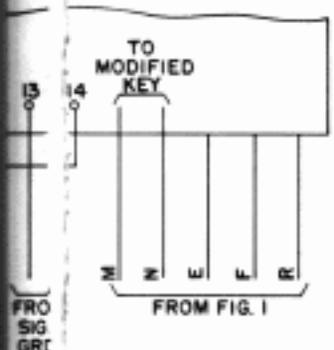
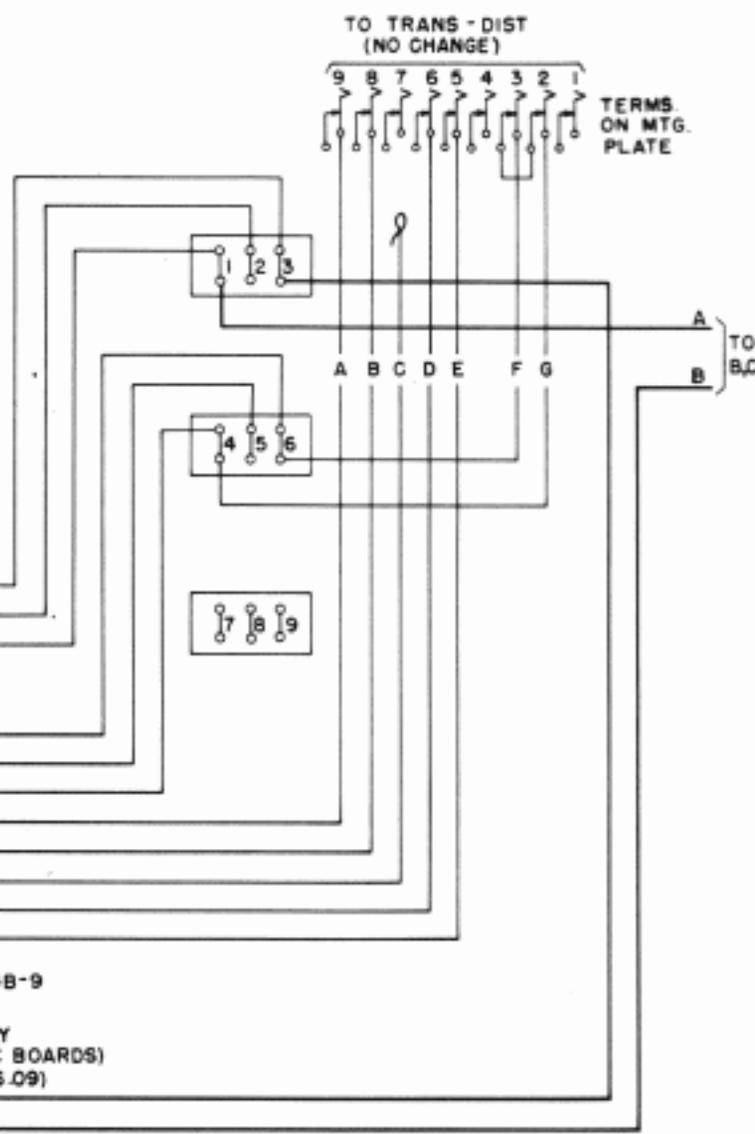


FIG. C
 CONNECTIONS FOR USE
 WITH OPEN LINE TLT
 BOARD (SEE PLAN LS 1.26)

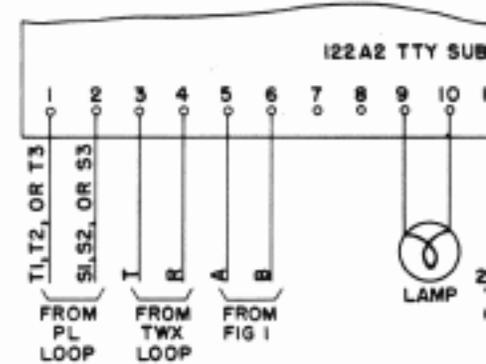


FIG. D
 CONNECTIONS FOR USE
 WITH 3 & 3A BOARDS
 (SEE PLAN LS 1.31)

