

- NOTES:
- BROKEN LINES T2 INDICATE LEADS CARRIED THROUGH CORRESPONDINGLY NUMBERED CONTACTS OF PLUG AND SOCKET CONNECTORS. T INDICATES TYPING UNIT CONNECTOR; K, KEYBOARD.
 - INDICATES CONNECTIONS TO BE ADDED, OR CHECKED FOR THEIR EXISTENCE.
 - UNLESS OTHERWISE SPECIFIED ALL COLORED LEADS SHALL BE 22GA BROWN, TYPE GS STATION WIRE PER AT&T CO. SPEC. 7089.
 - THIS BSP SECTION IS BASED ON USING THE FOLLOWING TTY UNITS:
28A TTY CABINET
28A ELECTRICAL SERVICE UNIT
28A TYPING UNIT
28A OR 28B TTY BASE
28A OR 28B MOTOR UNIT
 - THE A & B LEADS SHALL BE CONNECTED TO TERMINALS ON WAVE SHAPING SET AS SPECIFIED ON THE LT WIRING PLAN. (SEE BSP P30.620)
 - THE MARGIN INDICATOR SWITCH IS OMITTED FROM THE 28B BASE (REC. ONLY).
 - THE 150 TYPE WAVE SHAPING SET (OR SETS) SHALL BE MOUNTED ON A WOOD PANEL IN THE TTY CABINET. THE WOOD PANEL, WHEN REQUIRED, SHALL BE PROVIDED LOCALLY.
 - STRAP TERMINALS OF SELECTOR MAGNET TERMINAL STRIP PER FIG. A OR B AS REQUIRED.
 - LINE AND GROUND CONNECTIONS TO THE CABINET TERMINAL STRIP SHALL BE MADE PER FIG. 3, 4 OR 5 AS REQUIRED.

MOTOR — (red line)
LS Relay — (green line)
LIVE — (blue line)

FIG. 2

EQUIPMENT ARRANGEMENT FOR
28A ELECTRICAL SERVICE UNIT

TOP VIEW

LINE SHUNT RELAY PANEL (INCLUDES SELECTOR MAGNET T.S.)	TP151426 PLATE (BLANK)	TP152758 PLATE & TERM. STRIP ASSEM. (INCLUDES MOTOR CONTROL T.S.)	TP151441 PLATE (BLANK)	POWER PANEL (INCLUDES POWER T.S.)
--	------------------------	---	------------------------	-----------------------------------

28 TYPE TELETYPEWRITER
PRIVATE LINE SERVICE
SEND-RECEIVE OR RECEIVING ONLY
MAGNET OPERATION, SWITCH CONTROL
2-W LINE OR 1-W TO GRD. AT TTY
120V A-C POWER

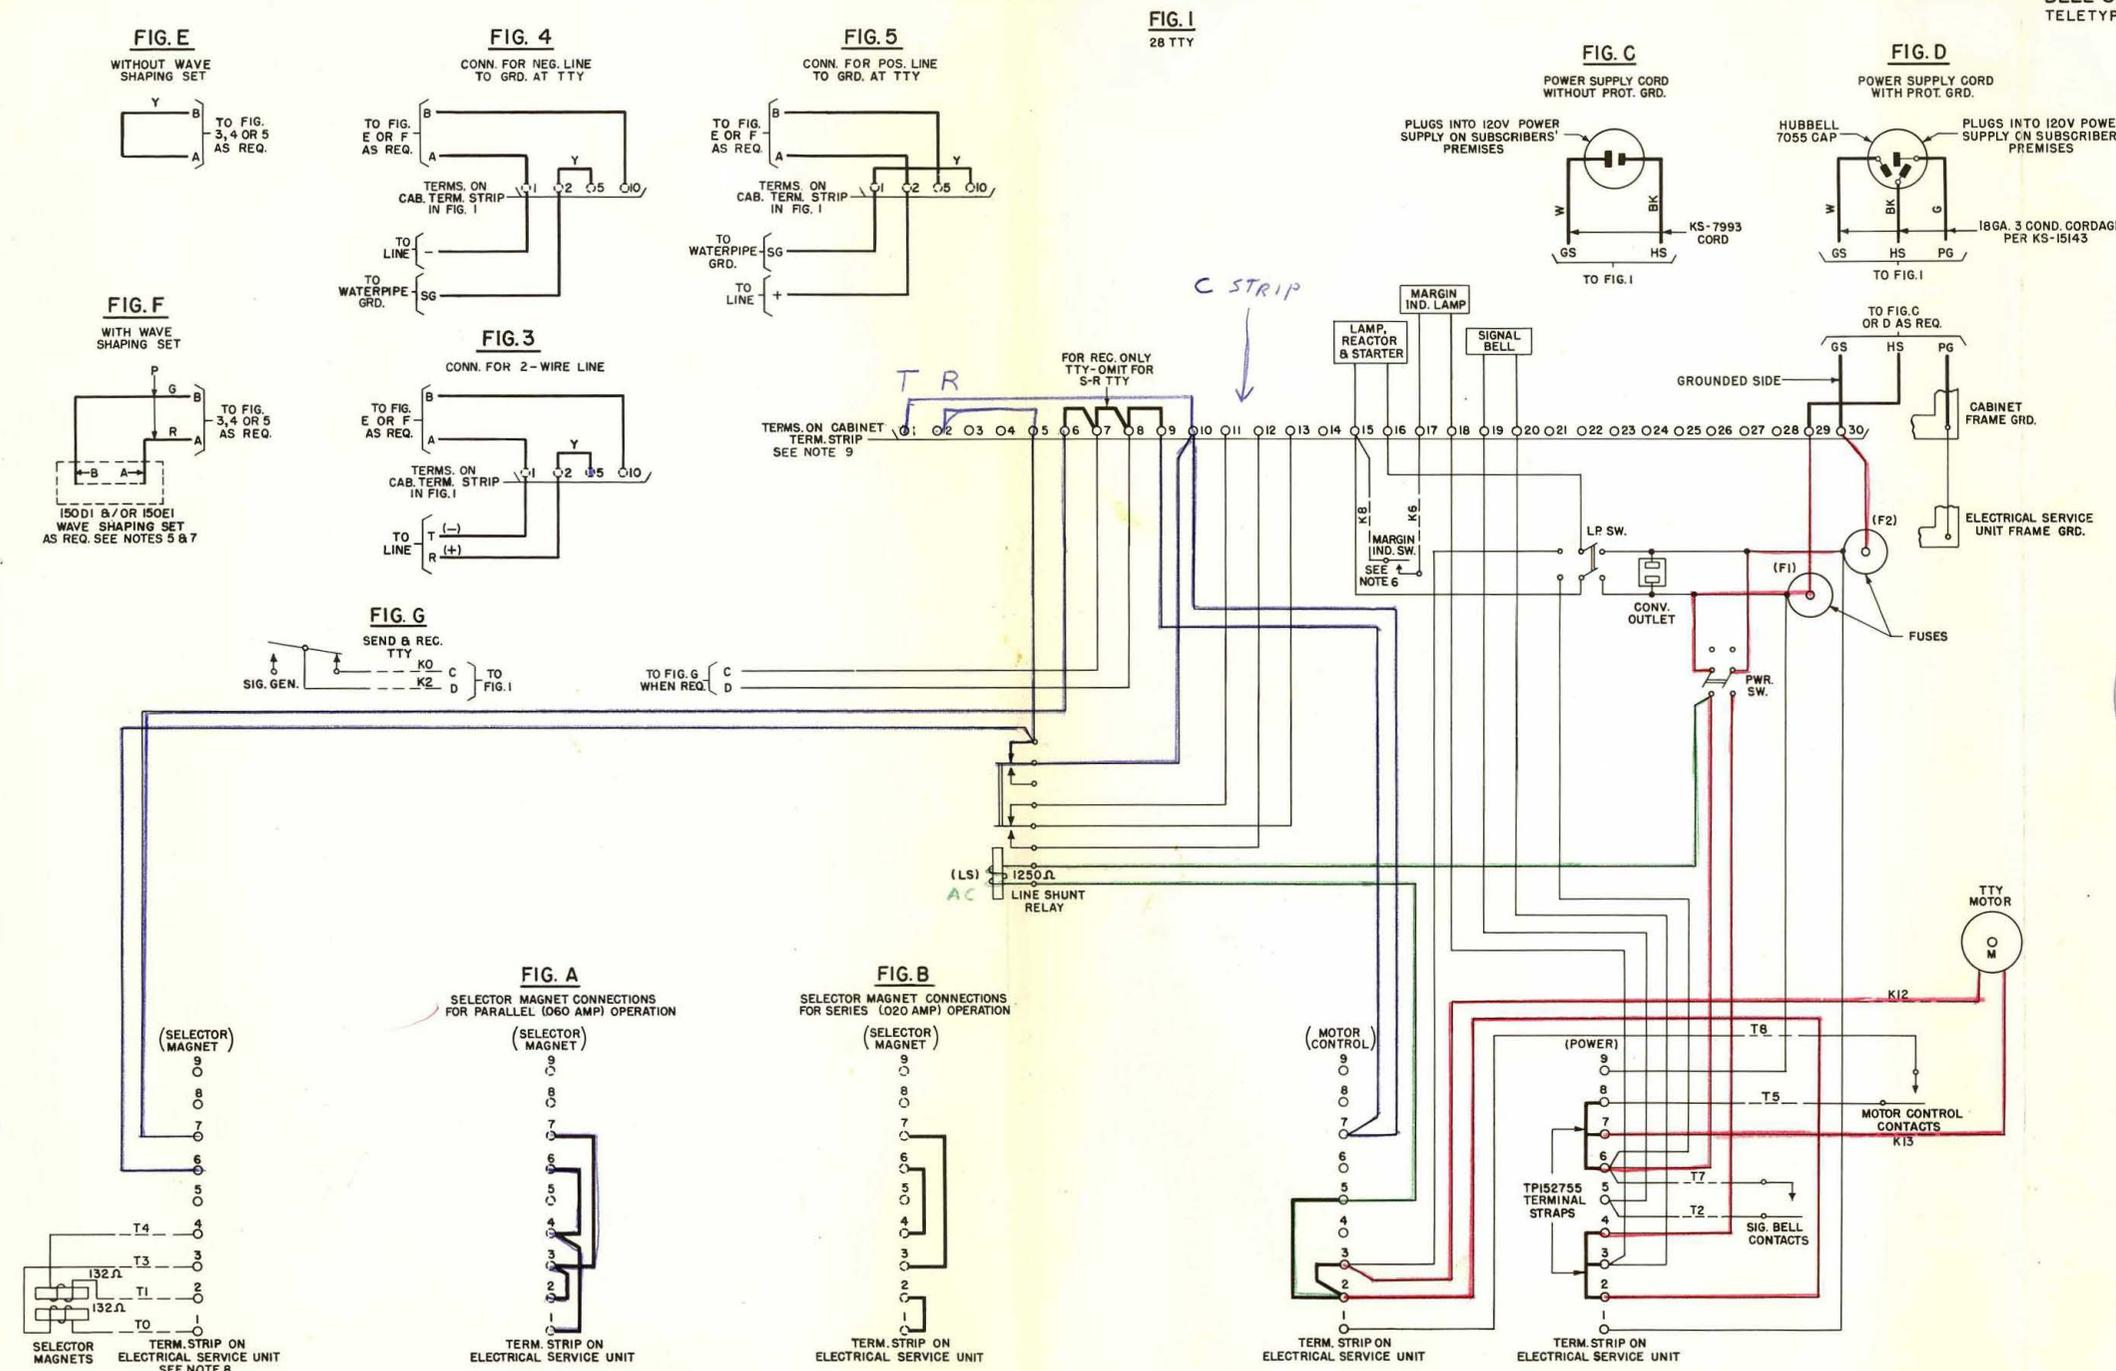


FIG. E




FIG. 4




FIG. 5




FIG. 1

28 TTY

FIG. C

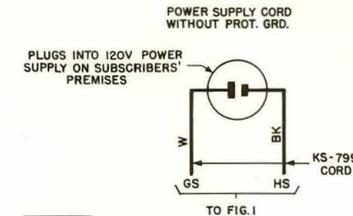


FIG. D

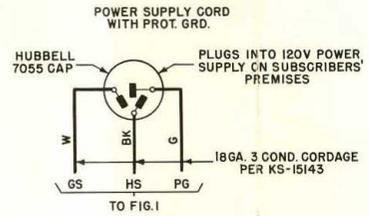


FIG. F




FIG. 3




FIG. G




FIG. A

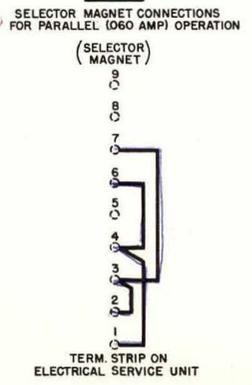


FIG. B

