

REV.	BY	DATE	APPROVED
1	1	5-23-49	W.F.
2-A	2-A	6-21-49	W.F.
3-A	3-A	9-19-49	W.F.
4-A	4-A	11-23-49	W.F.
5-A	5-A	11-23-49	W.F.

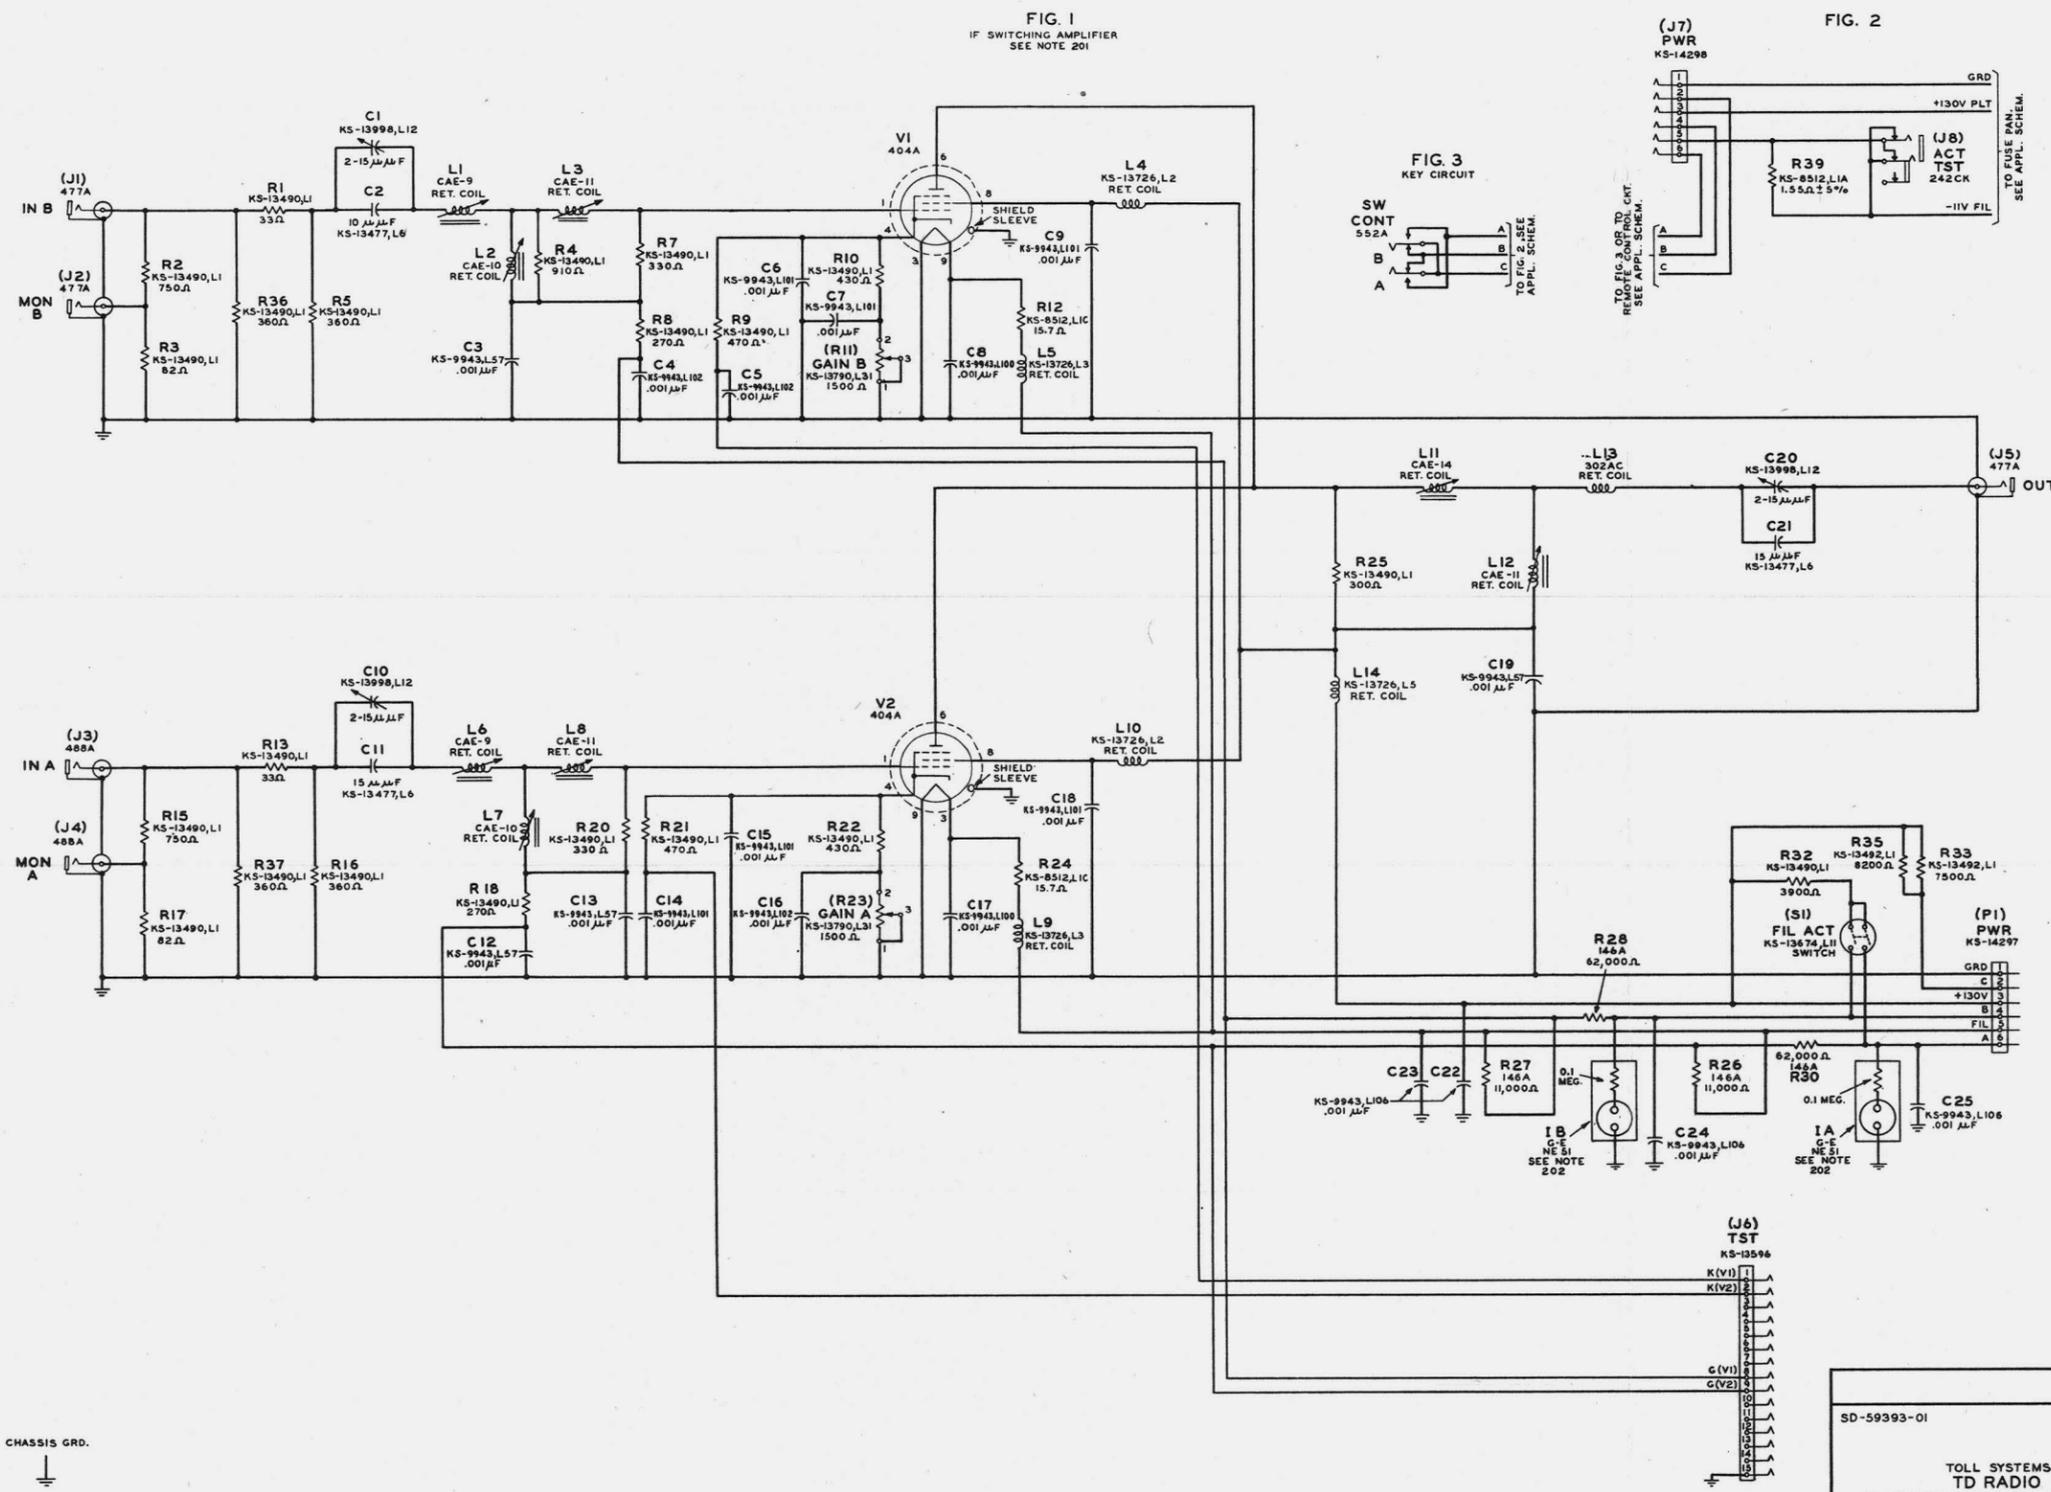


FIG. 1  
IF SWITCHING AMPLIFIER  
SEE NOTE 201

FIG. 2

FIG. 3  
KEY CIRCUIT

EQUIPMENT NOTES:  
201. THE PLACEMENT OF APPARATUS AND ARRANGEMENT OF WIRING MUST BE IN ACCORDANCE WITH EQUIPMENT REQUIREMENTS.  
202. 0.1 MEG. RESISTANCES ARE PART OF PILOT LIGHT ASSEMBLY 95410-93-5 DIAL LIGHT CO. OF AMERICA.

LAST RES. AND COND. USED ON THIS DWG.  
R39 C25



CHASSIS GRD.

10-33332-02

SD-59393-01

TOLL SYSTEMS  
TD RADIO  
IF SWITCHING AMPLIFIER CKT.  
(SW AMP)

BELL TELEPHONE LABORATORIES, INC.

AT&TCO STANDARD

SD-59393-01

R2

ED-63523-01  
EQUIPMENT INFO.