

CIRCUIT NOTES:
 101. ALL WIRING IS "DI" UNLESS OTHERWISE INDICATED.
 102. PROVIDE TUNER AS FOLLOWS:

FREQUENCY	TUNER
3730	400D
3770	400E
3810	400E
3850	400F
3890	
3930	
3970	
4010	
4050	
4090	
4130	
4170	

103. USE SPACERS PER ED-63543-01, AS DETERMINED BY TEST REQUIREMENTS.


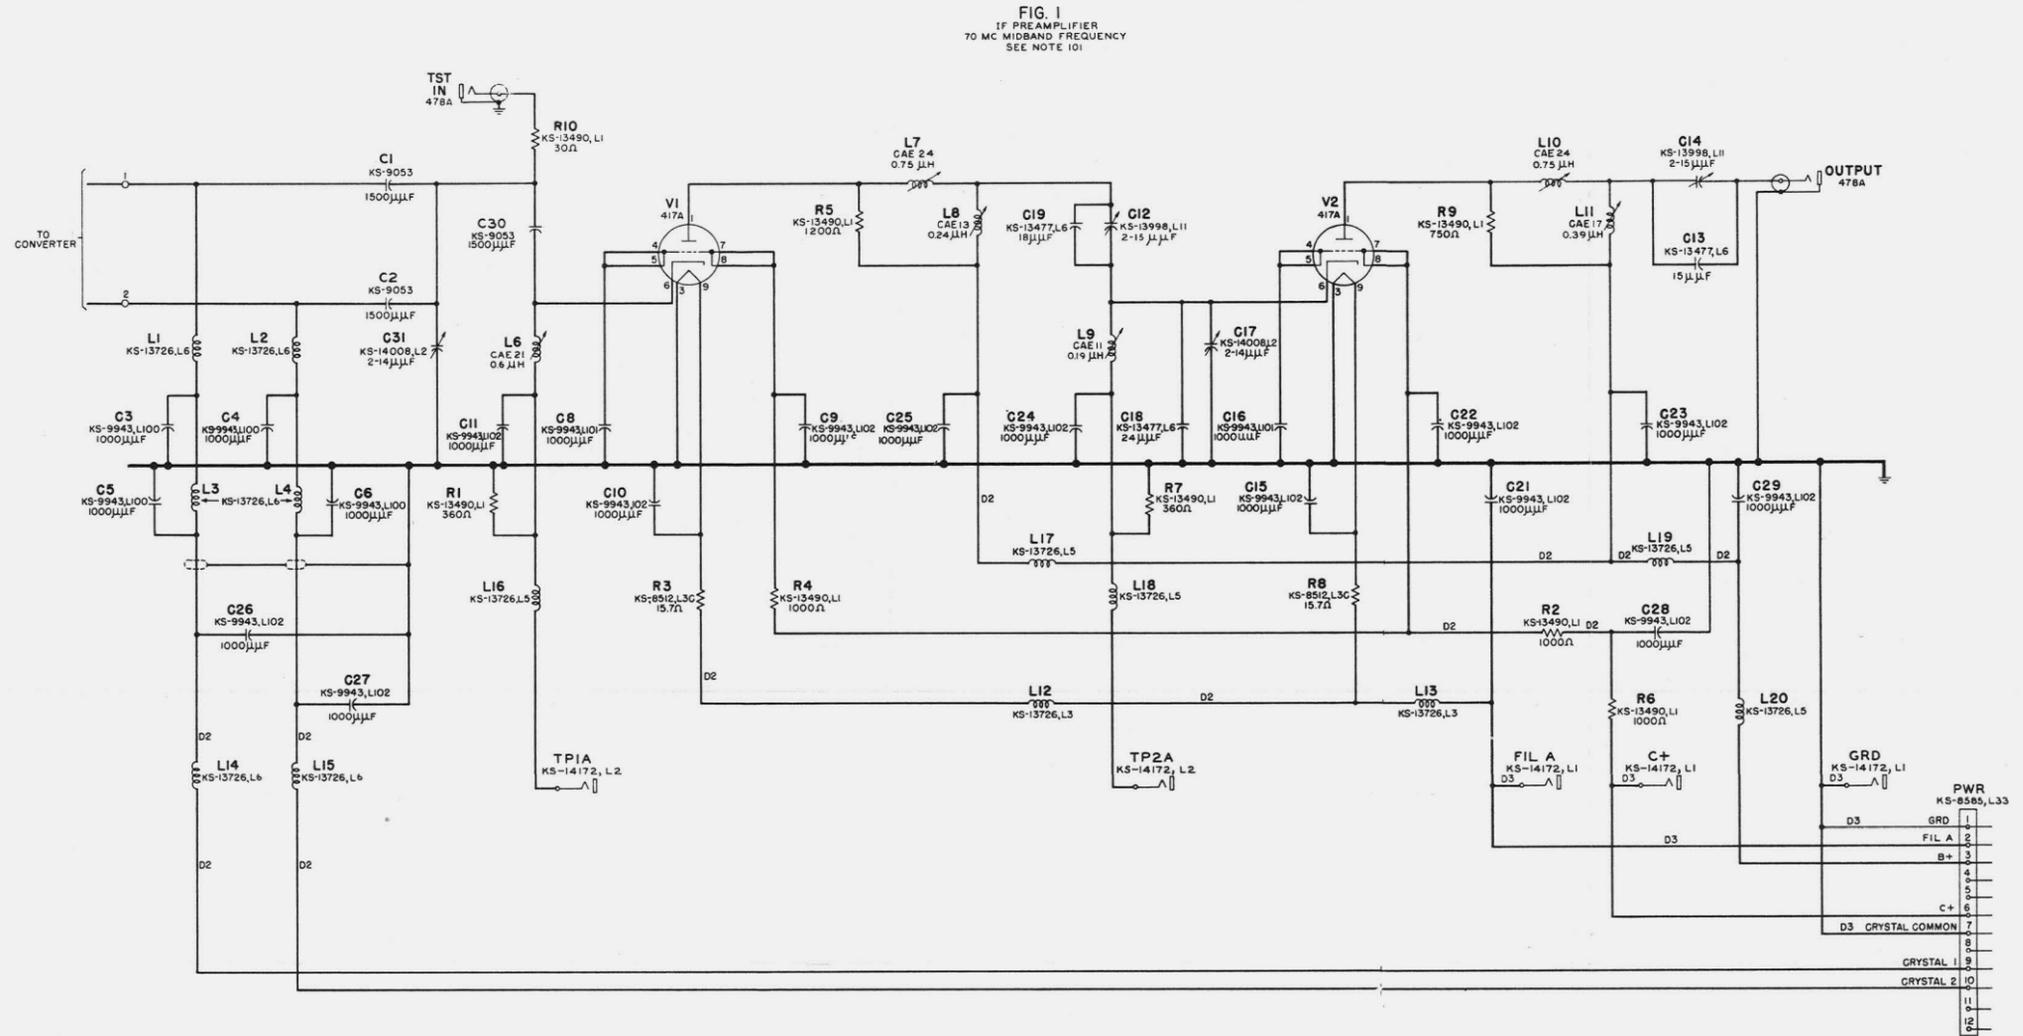


FIG. 2
 RECEIVER CONVERTER & IF PREAMPLIFIER CKT.

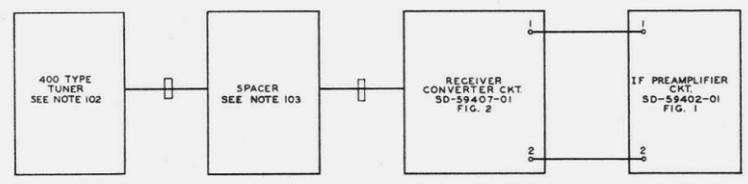

CHASSIS GRD.

LAST RES. AND COND. USED ON THIS DWG.	
R10	C31

(C7) & (C20) WERE NOT USED.

REV	BY	DATE	APPROVED
1		1-5-49	G.M.T.
2-A	APP-A	1-27-49	G.M.T.
3-A	2-A	3-2-49	G.M.T.

ED-63926-01
 ED-63929-01
 EQUIPMENT INFO.

SD-59402-01

TOLL SYSTEMS
 TD RADIO
 RECEIVER CONVERTER &
 IF PREAMPLIFIER CKT

AT&T
 STANDARD

SD-59402-01

BEL. TELEPHONE LABORATORIES, INC.

R2