FIG.51

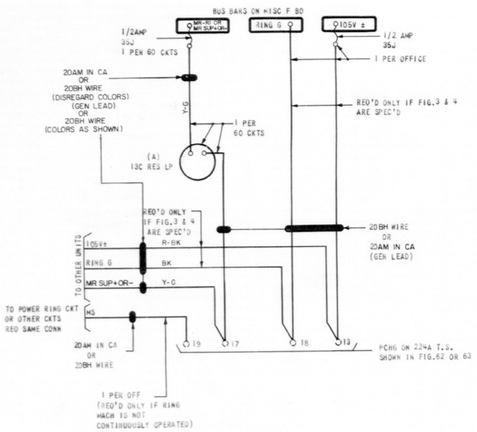

FIG.52



FIG.53



FIG.58



FIG.59



TABLE R	RECORD OF FIGURES, APPARATUS AND WIRING CHANGES								
CHANGED ON ISSUE	IF OFFICE RECORDS		THIS OPTION WAS FURNISHED	SEE NOTE	RATING				
	SPECIFY	DO NOT SPECIFY			STD	A&M	M D	SPL	
6		FIG. 66	NONE		66				

MANUFACTURING NOTES

DENOTES CABLE

1. WIRES NOT OTHERWISE SPEC'D TO BE 24G.
2. "P" DENOTE PAIR
3. "K2" TOP LEFT TERMINAL VIEWED FROM SURFACE WIRE SIDE.
4. "K3" BOTTOM LEFT TERMINAL VIEWED FROM SURFACE WIRING SIDE.
5. "1W","2W","3W" OR "4W" DENOTES 1,2,3 OR 4 CONDUCTOR JUMPER WIRE.
6. "C" WRG TO BE SEPARATE CABLE SEWED TO OUTSIDE OF REGULAR CABLE.
7. "B" DENOTES TERMINAL NEAREST BASE OF TERMINAL STRIP.
8. "F" OR "F1" BRING FROM CABLE FORM AT SEPARATE STITCH.
9. "PT" DENOTES LEADS PART OF APPARATUS.
10. Ø DENOTES LEADS IN FIG. 52, 62 OR 63 TO BE RUN BY THE INSTALLER.
11. INSTALLER TO CONNECT "S" STRAP WHEN CROSS CONN TO CONNECTOR TERMINALS NOT EQUIPPED WITH A LINE CKT.
12. WHEN T-31771-16 FIG.A OR B IS SPECIFIED ADD "T","R" OR "S" STRAPS IN FIG.62 OR 63 AS FOLLOWS:

CONDITION	STRAP
ALL CALLS TO TIP STATION ONLY	"T"
ALL CALLS TO RING STATION ONLY	"R"
NEITHER OF ABOVE	"S"

13. WHEN FIG.60 IS SPECIFIED MULT NON-WORKING TRUNKS TO LAST WORKING TRUNK.

FIG.64



FIG.61



FIG.66 (MFR DISC)



FIG.60



FIG.62

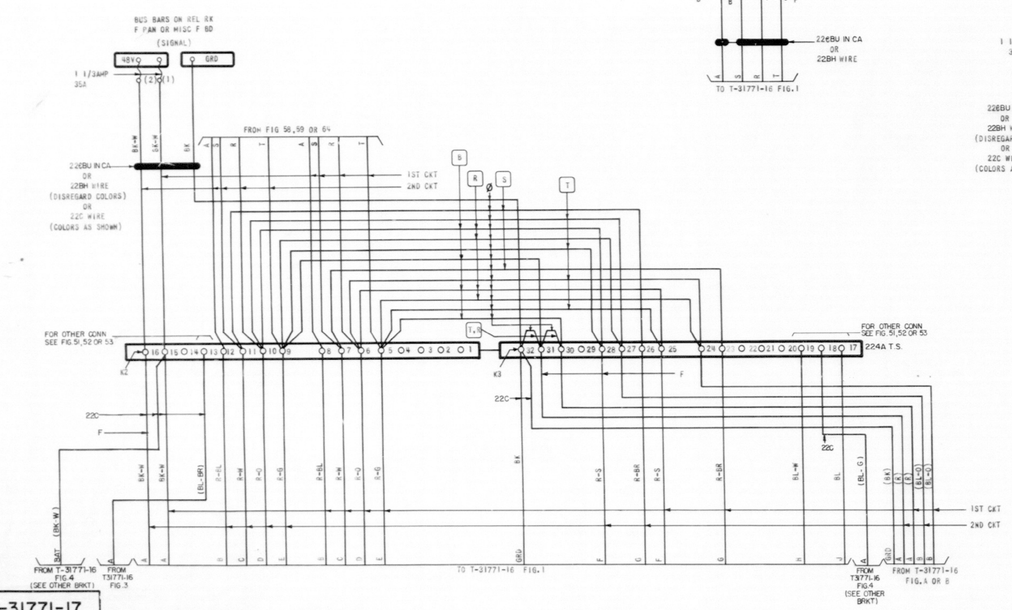

FIG.63

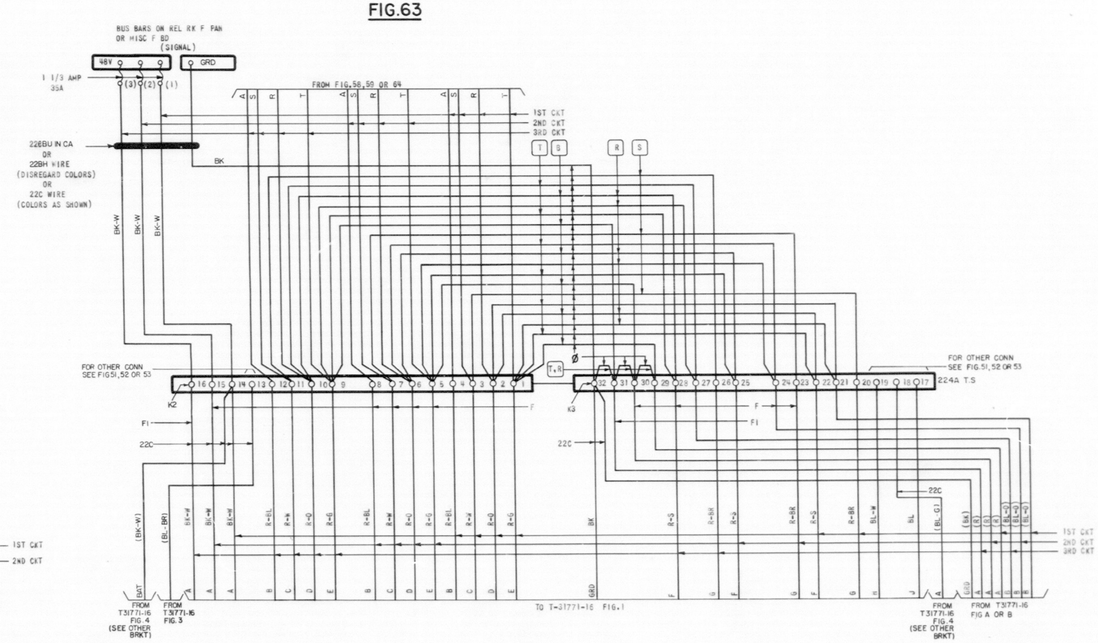

ENGINEERING NOTES				
51. THIS DRAWING AGREES WITH	105	1	6	
SD-31771-01	105	12	14	

52. FOR ENGINEERING NOTES SEE T-31771-16

T-31771-17

4D99

STEP BY STEP SYSTEMS NO.1,350A,355A,360A OR 35-E-97 INTERCEPTING TRUNK CIRCUIT FROM TRUNK FINDER,CONNECTOR BANK OR INTERCEPTING TRUNK TO TRUNK TO OPERATOR OFFICE ARRANGED TO TRIP RINGING ONLY DURING RINGING INTERVAL

(INCPT TRK & TRK SW)

PMTL ISSUE 10

STANDARD A&M ONLY FOR 350A, 360A OR 35-E-97

4 T-31771-17

WESTERN ELECTRIC COMPANY, INC.

DWG. SIZE 105

PRINTED IN U.S.A.

J1 | MS | R6

4-25-56				
105	10BB	JKD		1
FIG.52 PCHG (G)SW-(Y-LEAD) TO BRT PODED CKOS & SPT PODED TO LEADS FROM PCHG (B) 7-27-56				
105	DGK	10BB	—	2
IN FIGS 52 & 53 (BL-BR) & (BL-B) LEADS ON PCHGS (3T & 4T) ADD ON T.S. WIRES SHOWN IN FIGS 51, 52 & 53. 5-11-56				CLD
105	BLB	10BB	MP	3
IN FIG 5, BUS BAR 48-2 OR SUPPOR-RED 48 SUPPOR- 5-2-57				CLD
105	BD	WBD	MP	4
IN FIG 62 & 63 BR-W DEAT LEAD FROM T-31771-16 TO K-1 WAS SHOWN ON TOP OF PWR DISCONNECTED K-1 & F1 REMOVED 4-2-60				CLD
105	C	WBD	—	5
FIG. 66 & 67 TITLE REV TO 35-E-97 WERE ADDED 8-22-62				CLD
105	JKD	WBD	—	6
FIG 66 WAS RATED STD. A&M ONLY RATING FOR 350A OFF ADDED 10-30-64				CLD
105	WBD	—		7
FIGS 60 & 61 BRKT INFO READ FROM INCPT CIRCS ONLY. 8-19-66				CLD
105	JKD	—		8
FIG. 58,59 & 61 COLORS OF LEADS WERE NOT DESIG. 6-30-70				CLD
105	JKD	HEJ	—	9
FIG. 60 & 61 ON "A OR B" LEAD QUALIFYING NOTE "RED ONLY WHEN TRK FOR IS ARRANGED FOR REG & TBL INCPT" REMOVED 10-1-72				CLD
105	JKD	7633		10