

REISSUE GUIDE
X-75525 Issue 2
March 1966

The entire contents of this bulletin have been reprinted. Only pages containing changes have been redated.

The cover and tabs of the initial issue of the bulletin shall be retained and the tabs shall be inserted as follows:

| <u>Tab</u> | <u>Insert Ahead of Page</u> |
|------------|---------------------------------|
| I | i |
| II | II-1 |
| III | III-1 |
| IV | IV-1 |
| V | V-1 |
| VI | VI-1 |

ENGINEERING REFERENCE DATA

BELL SYSTEM
RESISTORS

*BELL TELEPHONE LABORATORIES
INCORPORATED*





CHECK LIST
For
X-75525, Issue 2
March 1966

The following list indicates the pages and their issue dates for Issue 2, March 1966, of Engineering Reference Data Bulletin X-75525 Bell System Resistors.

| <u>PAGE</u> | <u>DATE</u> | <u>PAGE</u> | <u>DATE</u> | <u>PAGE</u> | <u>DATE</u> | <u>PAGE</u> | <u>DATE</u> |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Title | no | II-26 | 3-66 | III-22 | 3-66 | V-24 | 1-59 |
| page | date | II-27 | 3-66 | III-23 | 3-66 | V-25 | 1-59 |
| Check | | II-28 | 3-66 | III-24 | 3-66 | V-27 | 1-59 |
| List | 3-66 | II-29 | 3-66 | III-25 | 3-66 | V-28 | 1-59 |
| i | 3-66 | II-30 | 3-66 | IV-1 | 1-59 | V-29 | 1-59 |
| ii | 3-66 | II-31 | 3-66 | IV-2 | 3-66 | V-30 | 1-59 |
| iii | 3-66 | II-32 | 3-66 | IV-3 | 3-66 | V-31 | 1-59 |
| iv | 3-66 | II-33 | 3-66 | IV-4 | 1-59 | V-32 | 1-59 |
| v | 3-66 | II-34 | 3-66 | IV-5 | 3-66 | V-33 | 1-59 |
| vii | 3-66 | II-35 | 3-66 | IV-6 | 3-66 | V-35 | 1-59 |
| viii | 3-66 | II-36 | 3-66 | IV-7 | 3-66 | V-36 | 1-59 |
| ix | 3-66 | II-37 | 3-66 | IV-8 | 3-66 | V-37 | 1-59 |
| x | 3-66 | II-38 | 3-66 | IV-9 | 3-66 | V-38 | 1-59 |
| xi | 3-66 | II-39 | 3-66 | IV-10 | 3-66 | V-39 | 1-59 |
| xii | 3-66 | II-41 | 3-66 | IV-11 | 3-66 | V-40 | 1-59 |
| xiii | 1-59 | II-43 | 3-66 | IV-12 | 3-66 | V-41 | 1-59 |
| xiv | 3-66 | II-45 | 3-66 | IV-13 | 3-66 | V-43 | 1-59 |
| xv | 3-66 | II-46 | 3-66 | IV-14 | 3-66 | V-45 | 3-66 |
| xvi | 3-66 | II-47 | 3-66 | IV-16 | 3-66 | V-46 | 3-66 |
| xvii | 3-66 | II-49 | 3-66 | IV-17 | 3-66 | V-47 | 3-66 |
| xviii | 3-66 | II-51 | 3-66 | IV-18 | 3-66 | V-49 | 1-59 |
| xix | 3-66 | II-53 | 3-66 | IV-20 | 3-66 | V-51 | 3-66 |
| xx | 3-66 | II-55 | 3-66 | IV-21 | 3-66 | V-53 | 1-59 |
| xxi | 3-66 | II-57 | 3-66 | IV-22 | 3-66 | V-54 | 1-59 |
| xxii | 3-66 | II-59 | 3-66 | IV-23 | 3-66 | V-55 | 1-59 |
| xxiii | 3-66 | II-61 | 3-66 | IV-24 | 3-66 | V-56 | 1-59 |
| xxv | 3-66 | II-62 | 3-66 | IV-25 | 3-66 | V-57 | 1-59 |
| xxvi | 3-66 | II-63 | 3-66 | IV-26 | 3-66 | VI-1 | 1-59 |
| II-1 | 3-66 | II-65 | 3-66 | IV-27 | 3-66 | VI-2 | 1-59 |
| II-2 | 3-66 | II-67 | 3-66 | IV-28 | 3-66 | VI-3 | 1-59 |
| II-3 | 3-66 | II-69 | 3-66 | IV-29 | 3-66 | VI-4 | 1-59 |
| II-5 | 3-66 | III-1 | 1-59 | IV-30 | 3-66 | VI-5 | 1-59 |
| II-6 | 3-66 | III-2 | 3-66 | IV-31 | 3-66 | VI-6 | 1-59 |
| II-7 | 3-66 | III-3 | 3-66 | IV-32 | 3-66 | VI-7 | 3-66 |
| II-8 | 3-66 | III-4 | 3-66 | V-1 | 1-59 | VI-8 | 1-59 |
| II-9 | 3-66 | III-5 | 3-66 | V-2 | 3-66 | VI-9 | 1-59 |
| II-10 | 3-66 | III-6 | 3-66 | V-3 | 3-66 | VI-10 | 1-59 |
| II-11 | 3-66 | III-7 | 3-66 | V-4 | 1-59 | VI-11 | 1-59 |
| II-12 | 3-66 | III-8 | 3-66 | V-5 | 3-66 | VI-13 | 1-59 |
| II-13 | 3-66 | III-9 | 3-66 | V-7 | 1-59 | VI-17 | 1-59 |
| II-14 | 3-66 | III-10 | 3-66 | V-8 | 1-59 | VI-19 | 1-59 |
| II-15 | 3-66 | III-11 | 3-66 | V-9 | 1-59 | VI-21 | 1-59 |
| II-16 | 3-66 | III-12 | 3-66 | V-10 | 1-59 | VI-23 | 1-59 |
| II-17 | 3-66 | III-13 | 3-66 | V-11 | 1-59 | VI-24 | 1-59 |
| II-18 | 3-66 | III-14 | 3-66 | V-13 | 1-59 | VI-25 | 1-59 |
| II-19 | 3-66 | III-15 | 3-66 | V-14 | 3-66 | VI-27 | 1-59 |
| II-20 | 3-66 | III-16 | 3-66 | V-15 | 3-66 | | |
| II-21 | 3-66 | III-17 | 3-66 | V-17 | 1-59 | | |
| II-22 | 3-66 | III-18 | 3-66 | V-18 | 1-59 | | |
| II-23 | 3-66 | III-19 | 3-66 | V-19 | 1-59 | | |
| II-24 | 3-66 | III-20 | 3-66 | V-21 | 1-59 | | |
| II-25 | 3-66 | III-21 | 3-66 | V-23 | 1-59 | | |

BELL SYSTEM RESISTORS

1. INTRODUCTION

This is one of a series of Engineering Reference Data Bulletins containing information on apparatus designed by the Bell Telephone Laboratories, Incorporated for other than military applications, and manufactured by the Western Electric Company or by other suppliers in accordance with specifications prepared by the Laboratories. It is intended primarily for use by engineers of the Laboratories and contains information on apparatus which may be rated AT&TCo STANDARD, A&M Only, Component Part; codes classified ML except as noted; or codes designated for non-associate use. Codes rated Manufacture Discontinued and Component Part (ML) are not included.

Information given herein is intended to aid in development work. For any specific circuit arrangement, however, consideration should be given to the possible existence of new designs which may be smaller or less expensive, or may have more desirable characteristics.

TO OBTAIN THE LATEST INFORMATION AND COMPLETE CHARACTERISTICS FOR ANY APPLICATION, CONSULT THE COMPONENTS LABORATORY, RESISTORS GROUP.

All resistors contained in the bulletin are general use types, except those designated special use. Special use types are so described because they are highly specialized and of limited application. PREFERRED NUMBERS (Standard Resistance Values) are given in Table 1, page vii. These values should be used when specifying the desired value of resistance of Family Code type resistors. Resistance values should be limited, insofar as possible, to these PREFERRED NUMBERS because of manufacturing economies. For definitions and additional information concerning Family Codes, see 3.2.

2. CARD CATALOG RATINGS

It is planned to bring this bulletin up to date periodically. However, the information contained herein may not be complete and ratings of the items are not shown. Therefore, the final selection of apparatus should be made on the basis of the usual sources of information such as the Western Electric Apparatus Card Catalog, the manufacturing specifications, and price data. For information regarding the output of apparatus, refer to the Western Electric Report A-822.1.

The bulletin contains some codes of apparatus for which catalog cards will not be found in the Western Electric Apparatus Card Catalog. Such codes are in general rated "Component Part". This rating is applied to apparatus where it is believed that the associated companies will have no need for apparatus card catalog information and orders for the apparatus from the field are not expected.

When apparatus which is not listed on a white card in the Western Electric Apparatus Card Catalog is selected for use in new applications, the Head, Engineering Standards Department, Bell Telephone Laboratories, Incorporated, 463 West Street, New York 10014, N.Y. should be notified of the new use and probable demand so that consideration can be given to rerating the apparatus. When such new applications are made within the Laboratories, the selection should first be discussed with the Components Laboratory, Resistors Group.

3. DATA AND INDEX TABLES

Coded and KS-specification resistors are included in the bulletin. Two indices follow this introduction, (1) a numerical index by code type indicating whether the resistor is for General or Special use and in what section the code will be found, and (2) a numerical index of all codes and KS-specifications indicating the section, page, and where necessary, the line on the page on which the resistor data will be found.

Detailed information on the resistance values, mechanical form, dimensions, characteristics and circuit arrangements are given in the data tables.

3.1 Specific Resistance Codes

Data Tables are provided for coded resistors in which a specific code designation is assigned to a resistor having a specific resistance value (i.e. 19BA, 36A, etc.). The resistors are listed in these tables in the order of ascending values of resistance, to facilitate the selection of resistors for new applications. However, in several cases of resistors with more than one winding, the resistors are listed in alphabetical order of the code letter.

3.2 Family Codes

A Family Code applies where the resistor code number must be followed by a nominal resistance value to complete the description and ordering information. Family code specifications cover a range of resistance values rather than specifying an individual resistance value as in the specific resistance codes. The marking on the resistor includes the code number followed by its nominal resistance value in ohms, for example; "106A 100" or KS-8512L5 1000". Family codes are of two classes, as described below, RESTRICTED and NON-RESTRICTED.

3.21 Resistance Values

A family coded resistor may be obtained in any value within the range specified in its data table. However, effort shall be made to choose a resistance value and tolerance from Table 1, page vii, of STANDARD RESISTANCE VALUES in order to take advantage of manufacturing economies.

3.22 Restricted Family Codes

For restricted family codes, the nominal values of resistance in current production by the Western Electric Company are listed on its Western Electric Company Apparatus Card Catalog card under the headings PREFERRED and NON-PREFERRED. Wherever possible the engineer should specify the PREFERRED values. These values are in accordance with Table 1, page vii, of STANDARD RESISTANCE VALUES. The NON-PREFERRED values are those within the prescribed range of values for the code but not in accordance with the STANDARD RESISTANCE VALUES Table in either/or resistance or tolerance.

New values in accordance with STANDARD RESISTANCE VALUES Table will be added to the list of PREFERRED values on the card catalog card by the Western Electric Company Technical Publications Organization, Apparatus Card Catalog, upon written request from the engineer. The new value may then be used in specifications, drawings, and orders. New values will be added to the list of NON-PREFERRED values on the card catalog card by the Western Electric Company Technical Pub-

lications Organization, Apparatus Card Catalog, upon written request from the engineer. This request should contain the reasons for requiring the NON-PREFERRED value as well as drawing and specification references for the circuit application of the resistor. The new value should not be referred to in specifications, drawings, and orders until approval has been received from the Standards Engineering Coding Group. This procedure is also required for new applications of a NON-PREFERRED value already listed in the Western Electric Apparatus Card Catalog.

3.23 Non-Restricted Family Codes

For non-restricted family codes, the nominal values of resistance in current production by the Western Electric Company are not listed in the Western Electric Apparatus Card Catalog and the procedures necessary to restricted family codes do not apply. However, it is recommended that resistance values in agreement with the STANDARD RESISTANCE VALUES Table be specified for use with these codes wherever possible.

3.24 Family Codes - Wire Wound

Most of the family code-type wire wound resistors are in the PRECISION wire wound classification. These resistors are all available in $\pm 1\%$ tolerances and some are also available in tolerances as close as $\pm 0.1\%$ of nominal resistance value. Others are available in tolerances of $\pm 2\%$ and $\pm 5\%$ for use in applications for which closer tolerances are not required and a saving in manufacturing costs is desired. Precision resistors are distinguished from power resistors in wattage rating, resistor tolerance, size, and construction material, although there is some overlapping of precision and power resistors in all these features.

4. RESISTOR SELECTION AND APPLICATION GUIDE

The following recommended practices will contribute to reliability, standardization, and least cost in the application of resistors:

4.1 Resistance Values and Tolerances

4.11 Nominal resistance value for family coded resistors shall be selected from the STANDARD RESISTANCE VALUES Table, page vii. (See 4.12).

4.12 In the case of the following resistor types only, the nominal resistance value shall be selected from the industry tables of recommended values shown in the individual KS-specific-ation:

| <u>Carbon Composition</u> | | <u>Wire Wound</u> |
|---------------------------|----------|-------------------|
| <u>Types</u> | | <u>Types</u> |
| KS-13490 | KS-16645 | KS-13609 |
| KS-13491 | | KS-13809 |
| KS-13492 | | |

4.13 Whenever possible, the broadest possible initial tolerance should be specified to achieve the lowest resistor cost.

4.2 Wattage and Derating Characteristics - Normal Operation

4.21 The wattage rating should never be exceeded (See 4.41). For operation at higher ambient temperatures, the maximum permissible power shall be decreased in accordance with the

specified power-temperature derating curve.

- 4.22 Maximum permissible power shall be reduced further if air flow is restricted by an enclosure, or if a number of resistors dissipating power are grouped together.
- 4.23 In critical applications where long term reliability and stability are essential, it is recommended that a resistor be selected such that its power rating is at least twice the power to be dissipated. This of course will result in a physically larger and more expensive resistor in most cases.
- 4.24 The vitreous enamel resistors of the KS varieties should be operated at 1/2 of their rated power to limit the surface temperature for personnel safety, or supplementary protection should be provided. When the option of reduced power is used, further reduction in accordance with 4.23 is not necessary.
- 4.25 The normal rating of the coded vitreous enamel resistors has been established to control the surface temperature for personnel safety. For this reason, further reduction of power dissipation in accordance with 4.23 is not necessary.

4.3 Wattage Characteristics - Trouble Conditions

- 4.31 The trouble wattage should not exceed twice the rated wattage. (The trouble wattage should not exceed the specified rated wattage in the case of the KS vitreous enamel resistors).
- 4.32 Some resistors, under high overload conditions, will burst into flame. If trouble conditions of this type cannot be avoided, spacing should be provided between the resistor and other flammable parts. This application should be brought to the attention of the Components Laboratory, Resistors Group.

4.4 Voltage Ratings

- 4.41 The maximum continuous voltage rating (DC or AC RMS) should never be exceeded, regardless of the voltage as calculated from the formula $E = RP$, where R = Resistance in ohms and P = Power in watts.
- 4.42 For short duration pulse operation, it is recommended that the peak voltage exceed 2 times the rated continuous working voltage. (See 4.63).

4.5 Mounting of Resistors

- 4.51 Other components susceptible to heat damage shall be spaced away from heat producing resistors.
- 4.52 When voltages in excess of maximum DC or AC RMS values exist between the resistor and a conducting surface, supplementary insulation shall be provided to insure protection against breakdown.
- 4.53 Resistors larger than 1/2" in diameter or larger than 2" in length shall not be mounted on their terminal leads. Resistors shall never be mounted by their terminal lugs.
- 4.54 Resistor terminal leads shall never be bent closer than 1/16" from the resistor body.

- 4.55 The length of the resistor lead between the resistor body and point of application of solder shall be 1/2" nominal, 3/8" minimum. For critical applications where short lead lengths are essential, the problems should be discussed with the Components Laboratory, Resistors Group.
- 4.56 No finish should be applied over the resistor body after assembly into equipment in order to prevent possible damage to the resistive element, or deterioration of the finish due to resistor heat.

4.6 Selection and Application

- 4.61 Only coded or KS resistors should be specified on drawings for Bell System use.
- 4.62 New resistor types, available from outside suppliers, should be discussed with the Components Laboratory, Resistors Group prior to using in circuit applications.
- 4.63 Special applications or situations (temperature coefficient, frequency performance, ratings under pulse conditions, cost, stability, etc.) should be discussed with the Components Laboratory, Resistors Group.
- 4.64 It is suggested that all resistor applications in a new circuit or system be reviewed with the Components Laboratory, Resistors Group prior to final issuance of the manufacturing drawings.

TABLE 1
STANDARD RESISTANCE VALUES
(PREFERRED NUMBERS)

| <u>±1%</u> | <u>Tolerance</u> | | | <u>±1%</u> | <u>Tolerance</u> | | | <u>±1%</u> | <u>Tolerance</u> | | |
|------------|------------------|------------|-------------|------------|------------------|------------|-------------|------------|------------------|------------|-------------|
| | <u>±2%</u> | <u>±5%</u> | <u>±10%</u> | | <u>±2%</u> | <u>±5%</u> | <u>±10%</u> | | <u>±2%</u> | <u>±5%</u> | <u>±10%</u> |
| 100 | 100 | 100 | 100 | 162 | 162 | 162 | 162 | 261 | 261 | 261 | 261 |
| 101 | | | | 164 | | | | 264 | | | |
| 102 | 102 | | | 165 | 165 | | | 267 | 267 | | |
| 104 | | | | 167 | | | | 271 | | | |
| 105 | 105 | 105 | | 169 | 169 | 169 | | 274 | 274 | 274 | |
| 106 | | | | 172 | | | | 277 | | | |
| 107 | 107 | | | 174 | 174 | | | 280 | 280 | | |
| 109 | | | | 176 | | | | 284 | | | |
| 110 | 110 | 110 | 110 | 178 | 178 | 178 | 178 | 287 | 287 | 287 | 287 |
| 111 | | | | 180 | | | | 291 | | | |
| 113 | 113 | | | 182 | 182 | | | 294 | 294 | | |
| 114 | | | | 184 | | | | 298 | | | |
| 115 | 115 | 115 | | 187 | 187 | 187 | 187 | 301 | 301 | 301 | |
| 117 | | | | 189 | | | | 305 | | | |
| 118 | 118 | | | 191 | 191 | | | 309 | 309 | | |
| 120 | | | | 193 | | | | 312 | | | |
| 121 | 121 | 121 | 121 | 196 | 196 | 196 | 196 | 316 | 316 | 316 | 316 |
| 123 | | | | 198 | | | | 320 | | | |
| 124 | 124 | | | 200 | 200 | | | 324 | 324 | | |
| 126 | | | | 203 | | | | 328 | | | |
| 127 | 127 | 127 | | 205 | 205 | 205 | | 332 | 332 | 332 | |
| 129 | | | | 208 | | | | 336 | | | |
| 130 | 130 | | | 210 | 210 | | | 340 | 340 | | |
| 132 | | | | 213 | | | | 344 | | | |
| 133 | 133 | 133 | 133 | 215 | 215 | 215 | 215 | 348 | 348 | 348 | 348 |
| 135 | | | | 218 | | | | 352 | | | |
| 137 | 137 | | | 221 | 221 | | | 357 | 357 | | |
| 138 | | | | 223 | | | | 361 | | | |
| 140 | 140 | 140 | | 226 | 226 | 226 | | 365 | 365 | 365 | |
| 142 | | | | 229 | | | | 370 | | | |
| 143 | 143 | | | 232 | 232 | | | 374 | 374 | | |
| 145 | | | | 234 | | | | 379 | | | |
| 147 | 147 | 147 | 147 | 237 | 237 | 237 | 237 | 383 | 383 | 383 | 383 |
| 149 | | | | 240 | | | | 388 | | | |
| 150 | 150 | | | 243 | 243 | | | 392 | 392 | | |
| 152 | | | | 246 | | | | 397 | | | |
| 154 | 154 | 154 | | 249 | 249 | 249 | | 402 | 402 | 402 | |
| 156 | | | | 252 | | | | 407 | | | |
| 158 | 158 | | | 255 | 255 | | | 412 | 412 | | |
| 160 | | | | 258 | | | | 417 | | | |

TABLE 1 (CONT.)

STANDARD RESISTANCE VALUES
(PREFERRED NUMBERS)

| Tolerance | | | | Tolerance | | | | Tolerance | | | |
|-----------|-----------|-----------|------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|------------|
| $\pm 1\%$ | $\pm 2\%$ | $\pm 5\%$ | $\pm 10\%$ | $\pm 1\%$ | $\pm 2\%$ | $\pm 5\%$ | $\pm 10\%$ | $\pm 1\%$ | $\pm 2\%$ | $\pm 5\%$ | $\pm 10\%$ |
| 422 | 422 | 422 | 422 | 562 | 562 | 562 | 562 | 750 | 750 | 750 | 750 |
| 427 | | | | 569 | | | | 759 | | | |
| 432 | 432 | | | 576 | 576 | | | 768 | 768 | | |
| 437 | | | | 583 | | | | 777 | | | |
| 442 | 442 | 442 | | 590 | 590 | 590 | | 787 | 787 | 787 | |
| 448 | | | | 597 | | | | 796 | | | |
| 453 | 453 | | | (4) | | | | 806 | 806 | | |
| 459 | | | | 604 | 604 | | | 816 | | | |
| 464 | 464 | 464 | 464 | 612 | | | | 825 | 825 | 825 | 825 |
| 470 | | | | 619 | 619 | 619 | 619 | 835 | | | |
| 475 | 475 | | | 626 | | | | 845 | 845 | | |
| 481 | | | | 634 | 634 | | | 856 | | | |
| 487 | 487 | 487 | | 642 | | | | 866 | 866 | 866 | |
| 493 | | | | 649 | 649 | 649 | | 876 | | | |
| 499 | 499 | | | 657 | | | | 887 | 887 | | |
| (4) | | | | 665 | 665 | | | 898 | | | |
| 505 | | | | 673 | | | | 909 | 909 | 909 | 909 |
| 511 | 511 | 511 | 511 | 681 | 681 | 681 | 681 | 920 | | | |
| 517 | | | | 690 | | | | 931 | 931 | | |
| 523 | 523 | | | 698 | 698 | | | 942 | | | |
| 530 | | | | 706 | | | | 953 | 953 | 953 | |
| 536 | 536 | 536 | | 715 | 715 | 715 | | 965 | | | |
| 542 | | | | 723 | | | | 976 | 976 | | |
| 549 | 549 | | | 732 | 732 | | | 988 | | | |
| 556 | | | | 741 | | | | | | | |

NOTES:

1. The values given in this table have been chosen as standard for resistances having limits of $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, and $\pm 10\%$ as indicated in the respective columns headed by these percentage figures.
2. The table gives the first three significant figures only and the decimal point should be placed as necessary, within the range specified for the desired type of resistor.
3. In the case of resistors with accuracy limits closer than $\pm 1\%$ it is recommended that nominal values for the first three significant figures be chosen to agree with the figures in the $\pm 1\%$ column of the table where practicable and that these nominal values be specified to not more than four significant figures.
4. Standard values significant figures 500 and 600 are limited to 50 and 600 ohms in $\pm 1\%$ tolerances. Other values whose first three significant figures are 500 and 600 (such as 500 ohms and 60 ohms) are not standard.

CODED RESISTORS

| <u>Code No.</u> | <u>Use</u> | <u>Section & Page</u> | <u>Code No.</u> | <u>Use</u> | <u>Section & Page</u> | <u>Code No.</u> | <u>Use</u> | <u>Section & Page</u> |
|-----------------|------------|---------------------------|-----------------|------------|---------------------------|-----------------|------------|---------------------------|
| 18 | General | II-1 | 132 | Special | VI-23 | 237 | General | III-12 |
| 19 | General | II-5 | 135 | Special | VI-25 | 238 | General | III-12 |
| 36 | General | V-1 | 136 | General | III-2 | 241 | Special | III-2 |
| 40 | Special | V-7 | 137 | General | III-2 | 242 | General | III-2 |
| 44 | General | II-41 | 138 | General | III-2 | 244 | General | III-4 |
| 59 | General | II-43 | 139 | Special | V-43 | 245 | General | III-4 |
| 60 | General | II-45 | 143 | General | III-2 | 246 | Special | III-25 |
| 63 | General | V-13 | 144 | General | III-10 | 248 | General | III-4 |
| 64 | General | III-2 | 145 | General | III-10 | 254 | General | III-24 |
| 65 | General | III-2 | 146 | General | III-10 | 6145 | Special | III-12 |
| 67 | General | II-47 | 147 | General | III-10 | | | |
| 71 | General | II-49 | 148 | Special | VI-27 | | | |
| 80 | General | V-17 | 149 | General | III-10 | | | |
| 82 | General | II-51 | 150 | General | III-10 | | | |
| 84 | General | II-53 | 151 | General | III-10 | | | |
| 85 | General | II-55 | 152 | General | III-10 | | | |
| 88 | Special | VI-1 | 153 | General | III-12 | | | |
| 89 | Special | VI-3 | 154 | General | III-12 | | | |
| 91 | General | II-57 | 202 | General | V-53 | | | |
| 92 | General | II-23 | 206 | General | III-12 | | | |
| 96 | General | II-59 | 207 | General | III-12 | | | |
| 98 | Special | VI-13 | 208 | General | III-12 | | | |
| 100 | General | II-61 | 209 | General | III-12 | | | |
| 101 | General | V-27 | 210 | General | V-53 | | | |
| 102 | Special | V-31 | 211 | General | V-53 | | | |
| 104 | Special | V-31 | 212 | Special | V-39 | | | |
| 105 | General | V-21 | 213 | Special | V-39 | | | |
| 106 | General | III-2 | 214 | Special | V-39 | | | |
| 107 | General | III-2 | 215 | General | V-53 | | | |
| 109 | General | V-23 | 216 | General | III-2 | | | |
| 113 | Special | VI-17 | 217 | General | III-2 | | | |
| 114 | Special | VI-17 | 218 | General | III-22 | | | |
| 115 | Special | V-31 | 219 | General | V-56 | | | |
| 116 | Special | VI-19 | 220 | General | V-56 | | | |
| 119 | General | II-65 | 221 | General | III-12 | | | |
| 120 | General | II-33 | 222 | General | III-12 | | | |
| 123 | General | II-35 | 223 | General | III-12 | | | |
| 124 | General | V-45 | 224 | General | V-45 | | | |
| 125 | Special | VI-21 | 225 | General | V-45 | | | |
| 126 | General | V-49 | 226 | General | III-23 | | | |
| 127 | Special | VI-23 | 227 | General | III-2 | | | |
| 128 | Special | V-41 | 228 | General | III-2 | | | |
| 129 | Special | V-41 | 234 | General | II-67 | | | |
| 130 | Special | V-51 | 235 | General | II-67 | | | |
| 131 | General | V-49 | 236 | Special | II-69 | | | |

INDEX 1

KS-SPECIFICATION RESISTORS

| <u>KS-</u> <u>No.</u> | <u>Use</u> | <u>Section</u> <u>& Page</u> | <u>KS-</u> <u>No.</u> | <u>Use</u> | <u>Section</u> <u>& Page</u> | <u>KS-</u> <u>No.</u> | <u>Use</u> | <u>Section</u> <u>& Page</u> |
|--------------------------|--------------------|-------------------------------------|--------------------------|------------|-------------------------------------|--------------------------|------------|-------------------------------------|
| *8441 | General | IV-2* | | | | | | |
| *8451 | General | IV-2* | | | | | | |
| *8452 | General | IV-2* | | | | | | |
| 8512 | General | IV-2 | | | | | | |
| 9913 | General | IV-2 | | | | | | |
| 9914 | General | IV-2 | | | | | | |
| 13192 | General | IV-2 | | | | | | |
| 13490 | General | IV-12 | | | | | | |
| 13491 | General | IV-12 | | | | | | |
| 13492 | General | IV-12 | | | | | | |
| 13609 | General | IV-2 | | | | | | |
| 13653 | General | IV-2 | | | | | | |
| 13657 | General | IV-2 | | | | | | |
| 13809 | General | IV-2 | | | | | | |
| 14175 | General | IV-6 | | | | | | |
| 14272 | General | IV-6 | | | | | | |
| 14603 | General | IV-6 | | | | | | |
| 16073 | General | IV-6 | | | | | | |
| 16122 | General | IV-6 | | | | | | |
| 16125 | General | IV-6 | | | | | | |
| 16266 | General | IV-6 | | | | | | |
| 16311 | General | IV-16 | | | | | | |
| 16312 | General | IV-16 | | | | | | |
| 16313 | General | IV-16 | | | | | | |
| 16314 | General | IV-16 | | | | | | |
| 16315 | General | IV-16 | | | | | | |
| 16340 | General | IV-6 | | | | | | |
| 16543 | General | IV-6 | | | | | | |
| 16645 | General | IV-10 | | | | | | |
| 16764 | Special | IV-8 | | | | | | |
| 16814 | General | IV-8 | | | | | | |
| 16822 | Special | IV-8 | | | | | | |
| 16896 | Special | IV-20 | | | | | | |
| 16907 | General | IV-8 | | | | | | |
| 19077 | General | IV-12 | | | | | | |
| 19113 | General | IV-20 | | | | | | |
| 19150 | General | IV-12 | | | | | | |
| 19151 | General | IV-12 | | | | | | |
| 19152 | General | IV-12 | | | | | | |
| 19238 | General | IV-8 | | | | | | |
| 19548 | General | IV-8 | | | | | | |
| 19756 | General | IV-20 | | | | | | |
| 19769 | General | IV-8 | | | | | | |
| 19863 | General | IV-8 | | | | | | |
| 19949 | General | IV-8 | | | | | | |

* MANUFACTURE DISCONTINUED

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 18A | II-1-37 | 18BD | II-3-3 | 18DU | II-3-55 |
| 18B | II-1-41 | 18BE | II-1-30 | 18DW | II-2-18 |
| 18C | II-2-8 | 18BF | II-2-55 | 18DY | II-1-28 |
| 18D | II-2-21 | 18BG | II-2-71 | 18EA | II-3-75 |
| 18E | II-2-29 | 18BH | II-3-23 | 18EB | II-2-9 |
| 18F | II-2-31 | 18BJ | II-3-28 | 18EC | II-3-69 |
| 18G | II-2-38 | 18BK | II-3-30 | 18ED | II-2-6 |
| 18H | II-2-42 | 18BL | II-3-15 | 18EE | II-2-24 |
| 18J | II-1-36 | 18BM | II-3-22 | 18EF | II-3-48 |
| 18K | II-2-7 | 18BN | II-2-65 | 18EG | II-1-34 |
| 18L | II-2-33 | 18BR | II-1-48 | 18EH | II-3-47 |
| 18M | II-1-46 | 18BS | II-2-10 | 18EJ | II-2-52 |
| 18N | II-2-34 | 18BT | II-2-37 | 18EK | II-3-51 |
| 18P | II-2-25 | 18BU | II-2-61 | 18EL | II-2-17 |
| 18Q | II-2-15 | 18BW | II-2-13 | 18EM | II-3-74 |
| 18R | II-1-23 | 18BY | II-3-7 | 18EN | II-3-10 |
| 18S | II-1-31 | 18CB | II-3-21 | 18EP | II-2-20 |
| 18T | II-1-45 | 18CF | II-3-8 | 18ER | II-2-26 |
| 18U | II-2-14 | 18CH | II-1-6 | 18ES | II-3-64 |
| 18W | II-2-27 | 18CJ | II-1-17 | 18ET | II-2-4 |
| 18Y | II-2-11 | 18CK | II-2-76 | 18EU | II-2-79 |
| 18Z | II-1-50 | 18CN | II-3-17 | 18EW | II-3-66 |
| 18AA | II-2-12 | 18CP | II-3-29 | 18EY | II-3-40 |
| 18AB | II-1-43 | 18CR | II-3-43 | 18FA | II-2-51 |
| 18AC | II-2-81 | 18CS | II-1-3 | 18FB | II-3-19 |
| 18AD | II-2-46 | 18CT | II-3-33 | 18FC | II-3-60 |
| 18AE | II-3-6 | 18CU | II-1-4 | 18FD | II-2-41 |
| 18AF | II-2-62 | 18CW | II-1-7 | 18FE | II-2-3 |
| 18AG | II-2-45 | 18CY | II-3-35 | 18FF | II-1-42 |
| 18AH | II-2-63 | 18DA | II-3-34 | 18FG | II-3-73 |
| 18AJ | II-2-72 | 18DB | II-3-53 | 18FH | II-1-47 |
| 18AK | II-1-49 | 18DC | II-2-64 | 18FJ | II-3-65 |
| 18AL | II-1-15 | 18DD | II-1-25 | 18FK | II-3-56 |
| 18AM | II-2-48 | 18DE | II-3-20 | 18FL | II-3-9 |
| 18AN | II-2-67 | 18DF | II-2-57 | 18FN | II-3-41 |
| 18AP | II-2-80 | 18DG | II-2-75 | 18FP | II-3-70 |
| 18AR | II-2-70 | 18DH | II-3-13 | 18FR | II-3-57 |
| 18AS | II-2-66 | 18DJ | II-1-27 | 18FS | II-3-61 |
| 18AT | II-3-37 | 18DK | II-1-35 | 18FT | II-1-19 |
| 18AU | II-2-69 | 18DL | II-2-16 | 18FU | II-1-33 |
| 18AW | II-1-40 | 18DM | II-2-5 | 18FW | II-1-22 |
| 18AY | II-1-11 | 18DN | II-3-58 | 18FY | II-2-82 |
| 18BA | II-3-44 | 18DP | II-1-29 | 18GB | II-1-44 |
| 18BB | II-1-10 | 18DR | II-3-14 | 18GC | II-1-13 |
| 18BC | II-2-77 | 18DS | II-3-38 | 18GD | II-2-30 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 18GE | II-3-36 | 18JK | II-2-56 | 19P | II-7-27 |
| 18GF | II-3-16 | 18JL | II-1-32 | 19S | II-9-28 |
| 18GG | II-3-1 | 18JM | II-2-35 | 19T | II-7-42 |
| 18GH | II-3-5 | 18JN | II-2-54 | 19W | II-6-40 |
| 18GJ | II-2-22 | 18JP | II-2-28 | 19Y | II-7-8 |
| 18GK | II-2-74 | 18JR | II-2-44 | 19Z | II-11-33 |
| 18GL | II-3-68 | 18JS | II-2-2 | 19AB | II-11-34 |
| 18GM | II-3-50 | 18JT | II-1-26 | 19AC | II-9-29 |
| 18GN | II-3-31 | 18JU | II-3-42 | 19AD | II-12-30 |
| 18GP | II-2-39 | 18JW | II-3-77 | 19AF | II-12-20 |
| 18GR | II-1-14 | 18JY | II-2-78 | 19AG | II-11-35 |
| 18GS | II-1-16 | 18KA | II-3-49 | 19AH | II-14-30 |
| 18GT | II-3-67 | 18KB | II-3-63 | 19AJ | II-13-36 |
| 18GU | II-1-21 | 18KC | II-3-11 | 19AK | II-10-4 |
| 18GW | II-1-18 | 18KD | II-2-85 | 19AL | II-8-36 |
| 18GY | II-2-84 | 18KE | II-3-12 | 19AM | II-9-9 |
| 18HA | II-3-24 | 18KF | II-3-76 | 19AN | II-14-42 |
| 18HB | II-3-46 | 18KG | II-1-20 | 19AP | II-13-17 |
| 18HC | II-3-52 | 18KH | II-2-68 | 19AR | II-9-30 |
| 18HD | II-2-60 | 18KJ | II-3-71 | 19AS | II-13-8 |
| 18HE | II-3-72 | 18KK | II-3-39 | 19AU | II-9-31 |
| 18HF | II-3-2 | 18KL | II-2-36 | 19AW | II-6-21 |
| 18HG | II-2-83 | 18KM | II-1-39 | 19AY | II-9-10 |
| 18HH | II-1-1 | 18KN | II-3-32 | 19BA | II-19-21 |
| 18HJ | II-1-2 | 18KP | II-3-45 | 19BB | II-15-24 |
| 18HK | II-1-8 | 18KR | II-3-18 | 19BC | II-9-11 |
| 18HL | II-1-9 | 18KS | II-3-25 | 19BD | II-10-43 |
| 18HM | II-1-12 | 18KT | II-3-59 | 19BE | II-8-5 |
| 18HN | II-1-24 | 18KU | II-3-62 | 19BF | II-17-40 |
| 18HP | II-1-38 | 18KW | II-1-5 | 19BG | II-13-37 |
| 18HR | II-2-19 | 18KY | II-3-27 | 19BH | II-10-44 |
| 18HS | II-2-23 | 18LA | II-2-49 | 19BJ | II-16-6 |
| 18HT | II-2-32 | 19A | II-8-22 | 19BK | II-8-37 |
| 18HU | II-2-47 | 19B | II-8-30 | 19BL | II-6-10 |
| 18HW | II-2-53 | 19C | II-8-31 | 19BM | II-19-37 |
| 18HY | II-2-58 | 19D | II-10-18 | 19BN | II-7-28 |
| 18JA | II-2-59 | 19E | II-8-4 | 19BP | II-15-6 |
| 18JB | II-2-73 | 19F | II-8-32 | 19BR | II-14-1 |
| 18JC | II-3-4 | 19G | II-8-33 | 19BS | II-7-29 |
| 18JD | II-3-26 | 19H | II-8-34 | 19BT | II-6-41 |
| 18JE | II-3-54 | 19J | II-6-39 | 19BU | II-12-16 |
| 18JF | II-2-40 | 19K | II-10-42 | 19BW | II-16-23 |
| 18JG | II-2-43 | 19L | II-9-27 | 19BY | II-14-16 |
| 18JH | II-2-50 | 19M | II-7-26 | 19CA | II-13-25 |
| 18JJ | II-2-1 | 19N | II-6-28 | 19CB | II-11-45 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 19CC | II-16-24 | 19EH | II-8-27 | 19GP | II-15-43 |
| 19CD | II-12-1 | 19EJ | II-8-13 | 19GR | II-10-40 |
| 19CE | II-12-2 | 19EK | II-7-9 | 19GS | II-10-37 |
| 19CF | II-15-14 | 19EL | II-11-39 | 19GT | II-9-20 |
| 19CG | II-15-7 | 19EM | II-12-6 | 19GU | II-7-2 |
| 19CH | II-10-45 | 19EN | II-13-11 | 19GW | II-7-11 |
| 19CJ | II-14-35 | 19EP | II-9-44 | 19GY | II-7-21 |
| 19CK | II-9-32 | 19ER | II-6-3 | 19HA | II-8-45 |
| 19CL | II-12-4 | 19ES | II-8-20 | 19HB | II-9-13 |
| 19CM | II-9-33 | 19ET | II-8-14 | 19HC | II-7-31 |
| 19CN | II-11-1 | 19EU | II-16-26 | 19HD | II-14-37 |
| 19CP | II-18-38 | 19EW | II-19-2 | 19HE | II-15-32 |
| 19CR | II-16-25 | 19EY | II-17-42 | 19HF | II-18-22 |
| 19CS | II-8-38 | 19FA | II-8-21 | 19HG | II-19-41 |
| 19CT | II-8-15 | 19FB | II-7-3 | 19HH | II-11-26 |
| 19CU | II-11-36 | 19FC | II-8-3 | 19HJ | II-11-27 |
| 19CW | II-11-37 | 19FD | II-7-14 | 19HK | II-15-33 |
| 19CY | II-16-20 | 19FE | II-7-38 | 19HL | II-17-34 |
| 19DA | II-14-25 | 19FF | II-10-6 | 19HM | II-11-23 |
| 19DB | II-6-3 | 19FG | II-11-5 | 19HN | II-11-24 |
| 19DC | II-17-7 | 19FH | II-9-34 | 19HP | II-6-42 |
| 19DD | II-12-44 | 19FJ | II-11-20 | 19HR | II-8-7 |
| 19DE | II-8-16 | 19FK | II-10-30 | 19HS | II-8-8 |
| 19DF | II-11-43 | 19FL | II-16-16 | 19HT | II-12-21 |
| 19DG | II-12-17 | 19FM | II-16-1 | 19HU | II-7-32 |
| 19DH | II-15-10 | 19FN | II-14-44 | 19HW | II-8-40 |
| 19DJ | II-11-30 | 19FP | II-13-27 | 19HY | II-7-33 |
| 19DK | II-10-39 | 19FR | II-16-13 | 19JA | II-10-31 |
| 19DL | II-9-12 | 19FS | II-12-32 | 19JB | II-7-34 |
| 19DM | II-6-2 | 19FT | II-15-20 | 19JC | II-14-38 |
| 19DN | II-11-2 | 19FU | II-13-18 | 19JD | II-15-34 |
| 19DP | II-6-4 | 19FW | II-16-42 | 19JE | II-21-1 |
| 19DR | II-6-11 | 19FY | II-12-13 | 19JF | II-11-6 |
| 19DS | II-16-7 | 19GA | II-16-34 | 19JG | II-14-31 |
| 19DT | II-12-31 | 19GB | II-10-13 | 19JH | II-13-1 |
| 19DU | II-11-3 | 19GC | II-10-11 | 19JJ | II-10-14 |
| 19DW | II-15-39 | 19GD | II-14-29 | 19JK | II-8-41 |
| 19DY | II-17-17 | 19GE | II-17-18 | 19JL | II-15-35 |
| 19EA | II-11-29 | 19GG | II-6-32 | 19JM | II-21-39 |
| 19EB | II-7-30 | 19GH | II-17-1 | 19JN | II-17-45 |
| 19EC | II-18-15 | 19GJ | II-15-28 | 19JP | II-19-3 |
| 19ED | II-9-22 | 19GK | II-15-29 | 19JR | II-9-35 |
| 19EE | II-10-33 | 19GL | II-15-30 | 19JS | II-19-43 |
| 19EF | II-7-5 | 19GM | II-16-35 | 19JT | II-11-31 |
| 19EG | II-17-41 | 19GN | II-15-31 | 19JU | II-9-8 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 19JW | II-9-40 | 19ME | II-16-18 | 19PK | II-12-7 |
| 19JY | II-15-2 | 19MF | II-6-24 | 19PL | II-12-41 |
| 19KA | II-10-8 | 19MG | II-7-35 | 19PM | II-12-28 |
| 19KB | II-11-16 | 19MH | II-7-40 | 19PN | II-9-39 |
| 19KC | II-9-7 | 19MJ | II-9-3 | 19PP | II-12-8 |
| 19KD | II-7-6 | 19MK | II-9-4 | 19PS | II-20-20 |
| 19KE | II-7-22 | 19ML | II-11-17 | 19PT | II-7-45 |
| 19KF | II-7-24 | 19MM | II-10-38 | 19PU | II-15-40 |
| 19KG | II-13-2 | 19MN | II-13-31 | 19PY | II-13-41 |
| 19KH | II-15-17 | 19MP | II-14-3 | 19RA | II-12-9 |
| 19KJ | II-17-10 | 19MR | II-16-4 | 19RB | II-11-10 |
| 19KK | II-12-39 | 19MS | II-10-3 | 19RC | II-18-3 |
| 19KL | II-15-4 | 19MT | II-12-15 | 19RD | II-17-13 |
| 19KM | II-10-20 | 19MU | II-14-27 | 19RE | II-19-16 |
| 19KN | II-12-29 | 19MW | II-16-27 | 19RF | II-13-6 |
| 19KP | II-17-20 | 19MY | II-11-41 | 19RG | II-19-1 |
| 19KR | II-21-28 | 19NA | II-8-2 | 19RJ | II-11-11 |
| 19KS | II-9-45 | 19NB | II-8-42 | 19RK | II-14-7 |
| 19KT | II-10-24 | 19NC | II-7-39 | 19RL | II-18-27 |
| 19KU | II-6-18 | 19ND | II-9-6 | 19RM | II-20-34 |
| 19KW | II-6-7 | 19NE | II-13-19 | 19RN | II-19-45 |
| 19KY | II-20-41 | 19NF | II-9-23 | 19RP | II-22-13 |
| 19LA | II-15-32 | 19NG | II-18-9 | 19RR | II-10-16 |
| 19LB | II-12-35 | 19NH | II-12-37 | 19RS | II-9-1 |
| 19LC | II-11-7 | 19NJ | II-6-44 | 19RT | II-17-27 |
| 19LD | II-10-1 | 19NK | II-14-6 | 19RU | II-7-1 |
| 19LE | II-14-32 | 19NL | II-9-16 | 19RW | II-7-4 |
| 19LG | II-10-21 | 19NM | II-12-40 | 19RY | II-12-22 |
| 19LH | II-14-33 | 19NN | II-12-18 | 19SA | II-20-21 |
| 19LJ | II-8-24 | 19NP | II-11-8 | 19SC | II-7-41 |
| 19LK | II-10-9 | 19NR | II-7-37 | 19SD | II-21-4 |
| 19LL | II-12-26 | 19NS | II-7-44 | 19SE | II-18-19 |
| 19LM | II-15-9 | 19NT | II-16-38 | 19SF | II-14-4 |
| 19LN | II-17-9 | 19NU | II-11-9 | 19SG | II-15-3 |
| 19LP | II-17-4 | 19NW | II-17-22 | 19SH | II-15-18 |
| 19LR | II-8-18 | 19NY | II-8-9 | 19SJ | II-15-23 |
| 19LS | II-7-12 | 19PA | II-6-30 | 19SK | II-13-30 |
| 19LT | II-12-27 | 19PB | II-14-13 | 19SL | II-12-38 |
| 19LU | II-6-13 | 19PC | II-11-15 | 19SM | II-13-42 |
| 19LW | II-6-22 | 19PD | II-13-35 | 19SN | II-20-14 |
| 19LY | II-9-15 | 19PE | II-15-16 | 19SP | II-17-29 |
| 19MA | II-11-28 | 19PF | II-16-12 | 19SR | II-18-5 |
| 19MB | II-16-15 | 19PG | II-15-21 | 19SS | II-22-3 |
| 19MC | II-17-6 | 19PH | II-8-10 | 19ST | II-9-19 |
| 19MD | II-10-15 | 19PJ | II-17-23 | 19SU | II-13-20 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 19SW | II-14-28 | 19WE | II-13-21 | 19AAM | II-15-22 |
| 19SY | II-14-8 | 19WF | II-13-5 | 19AAN | II-16-19 |
| 19TA | II-16-28 | 19WG | II-19-9 | 19AAP | II-17-14 |
| 19TB | II-19-30 | 19WH | II-21-15 | 19AAR | II-18-34 |
| 19TC | II-21-8 | 19WJ | II-14-14 | 19AAS | II-19-7 |
| 19TD | II-11-12 | 19WK | II-9-43 | 19AAT | II-19-8 |
| 19TE | II-20-22 | 19WL | II-14-45 | 19AAU | II-18-45 |
| 19TF | II-17-25 | 19WM | II-22-4 | 19AAW | II-18-40 |
| 19TG | II-6-9 | 19WN | II-10-26 | 19AAZ | II-18-32 |
| 19TH | II-6-20 | 19WP | II-17-37 | 19ABA | II-18-30 |
| 19TJ | II-21-10 | 19WR | II-18-26 | 19ABB | II-18-24 |
| 19TK | II-7-18 | 19WS | II-6-36 | 19ABC | II-18-21 |
| 19TL | II-20-15 | 19WT | II-13-43 | 19ABD | II-21-34 |
| 19TM | II-16-10 | 19WU | II-8-25 | 19ABE | II-11-40 |
| 19TN | II-9-18 | 19WW | II-9-2 | 19ABF | II-9-38 |
| 19TP | II-12-19 | 19WY | II-9-37 | 19ABG | II-18-12 |
| 19TR | II-18-6 | 19YA | II-15-41 | 19ABH | II-8-26 |
| 19TS | II-19-34 | 19YB | II-15-5 | 19ABJ | II-21-41 |
| 19TT | II-12-10 | 19YC | II-11-19 | 19ABK | II-14-26 |
| 19TU | II-18-29 | 19YD | II-14-21 | 19ABL | II-21-25 |
| 19TW | II-16-2 | 19YE | II-18-13 | 19ABM | II-22-29 |
| 19TY | II-7-26 | 19YF | II-19-11 | 19ABN | II-6-1 |
| 19UA | II-22-5 | 19YG | II-18-42 | 19ABP | II-18-8 |
| 19UB | II-18-7 | 19YH | II-18-35 | 19ABR | II-16-41 |
| 19UC | II-6-14 | 19YJ | II-18-31 | 19ABS | II-19-35 |
| 19UD | II-11-13 | 19YK | II-17-36 | 36F | V-2-1 |
| 19UE | II-18-39 | 19YL | II-18-20 | 36G | V-2-2 |
| 19UF | II-14-9 | 19YM | II-17-2 | 36H | V-2-3 |
| 19UG | II-14-10 | 19YN | II-21-30 | 36J | V-2-4 |
| 19UJ | II-16-3 | 19YP | II-7-17 | 36K | V-2-5 |
| 19UK | II-13-7 | 19YR | II-8-1 | 36L | V-2-6 |
| 19UL | II-10-25 | 19YS | II-10-12 | 36M | V-2-7 |
| 19UM | II-7-7 | 19YT | II-10-34 | 36U | V-2-8 |
| 19UN | II-15-15 | 19YU | II-12-25 | 36W | V-2-9 |
| 19UP | II-13-22 | 19YW | II-13-23 | 36Y | V-2-10 |
| 19UR | II-13-34 | 19YY | II-10-27 | 36AA | V-2-11 |
| 19US | II-14-23 | 19AAA | II-11-44 | 36AR | V-2-12 |
| 19UT | II-6-19 | 19AAB | II-13-4 | 36AS | V-2-13 |
| 19UU | II-19-6 | 19AAC | II-13-45 | 36AT | V-2-14 |
| 19UW | II-6-16 | 19AAD | II-18-41 | 36AU | V-2-15 |
| 19UY | II-11-14 | 19AAE | II-14-12 | 36AW | V-2-16 |
| 19WA | II-11-18 | 19AAH | II-13-44 | 36BY | V-2-17 |
| 19WB | II-6-31 | 19AAJ | II-7-36 | 36CA | V-2-18 |
| 19WC | II-8-43 | 19AAK | II-18-23 | 36CB | V-2-19 |
| 19WD | II-21-14 | 19AAL | II-14-34 | 36CC | V-2-20 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 36CE | V-2-21 | 4OAT | V-10-30 | 44U | II-41-26 |
| 36CG | V-2-22 | 4OAU | V-10-31 | 44W | II-41-22 |
| 36CH | V-2-23 | 4OAW | V-10-32 | 44Y | II-41-23 |
| 36CJ | V-2-24 | 4OAY | V-10-33 | 44AA | II-41-5 |
| 36CK | V-2-25 | 4OBA | V-10-34 | 44AB | II-41-3 |
| 36CL | V-2-26 | 4OBB | V-10-35 | 44AC | II-41-8 |
| 36CM | V-2-27 | 4OBC | V-10-36 | 44AD | II-41-15 |
| 36CN | V-2-28 | 4OBD | V-10-37 | 44AE | II-41-24 |
| 36CP | V-2-29 | 4OBE | V-10-38 | 44AF | II-41-25 |
| 36CR | V-2-30 | 4OBG | V-10-39 | 44AG | II-41-27 |
| 36CS | V-2-31 | 4OBH | V-10-40 | 44AH | II-41-28 |
| 36CT | V-2-32 | 4OBK | V-10-41 | 44AJ | II-41-29 |
| 36CU | V-2-33 | 4OBL | V-10-42 | 44AK | II-41-30 |
| 36CW | V-2-34 | 4OBN | V-10-43 | 44AL | II-41-7 |
| 36DA | V-2-35 | 4OBP | V-10-44 | 44AM | II-41-2 |
| 36DB | V-2-36 | 4OBR | V-10-45 | 44AN | II-41-1 |
| 4OA | V-10-1 | 4OBS | V-11-1 | 59A | II-43-18 |
| 4OB | V-10-2 | 4OBT | V-11-2 | 59B | II-43-19 |
| 4OD | V-10-3 | 4OBU | V-11-3 | 59C | II-43-13 |
| 4OH | V-10-4 | 4OBW | V-11-4 | 59D | II-43-10 |
| 4OJ | V-10-5 | 4OBY | V-11-5 | 59E | II-43-11 |
| 4OK | V-10-6 | 4OCA | V-11-6 | 59F | II-43-14 |
| 4OL | V-10-7 | 4OCB | V-11-7 | 59G | II-43-3 |
| 4OM | V-10-8 | 4OCC | V-11-9 | 59H | II-43-12 |
| 4ON | V-10-9 | 4OCD | V-11-10 | 59K | II-43-9 |
| 4OP | V-10-10 | 4OCE | V-11-11 | 59L | II-43-15 |
| 4OR | V-10-11 | 4OCF | V-11-12 | 59M | II-43-16 |
| 4OS | V-10-12 | 4OCG | V-11-13 | 59N | II-43-17 |
| 4OT | V-10-13 | 4OCJ | V-11-14 | 59P | II-43-4 |
| 4OU | V-10-14 | 4OCK | V-11-15 | 59R | II-43-7 |
| 4OW | V-10-15 | 4OCL | V-11-16 | 59S | II-43-2 |
| 4OY | V-10-16 | 44A | II-41-12 | 59T | II-43-6 |
| 4OAB | V-10-17 | 44B | II-41-11 | 59U | II-43-1 |
| 4OAD | V-10-18 | 44C | II-41-6 | 59W | II-43-5 |
| 4OAE | V-10-19 | 44D | II-41-20 | 59Y | II-43-8 |
| 4OAF | V-10-20 | 44E | II-41-14 | 60B | II-46-6 |
| 4OAG | V-10-21 | 44G | II-41-18 | 60C | II-46-5 |
| 4OAH | V-10-22 | 44J | II-41-17 | 60D | II-46-7 |
| 4OAJ | V-10-23 | 44K | II-41-13 | 60E | II-46-2 |
| 4OAK | V-10-24 | 44L | II-41-10 | 60F | II-46-3 |
| 4OAL | V-10-25 | 44M | II-41-4 | 60H | II-46-4 |
| 4OAM | V-10-26 | 44N | II-41-21 | 60J | II-46-1 |
| 4OAN | V-10-27 | 44P | II-41-19 | 60K | II-46-8 |
| 4OAP | V-10-28 | 44R | II-41-16 | 63A | V-14-4 |
| 4OAS | V-10-29 | 44S | II-41-9 | 63B | V-14-5 |

CODED RESISTORS

| <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> |
|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|---------------------------------|
| 63C | V-14-7 | 63CN | V-14-60 | 64C | III-2-3 |
| 63D | V-14-11 | 63CP | V-14-28 | 64D | III-2-4 |
| 63E | V-14-12 | 63CR | V-14-14 | 64E | III-2-5 |
| 63F | V-14-15 | 63CS | V-14-63 | 64F | III-2-6 |
| 63G | V-14-18 | 63CT | V-14-77 | 65B | III-2-8 |
| 63H | V-14-22 | 63CU | V-14-72 | 65C | III-2-9 |
| 63J | V-14-23 | 63CW | V-14-48 | 67A | II-47-12 |
| 63K | V-14-24 | 63CY | V-14-54 | 67B | II-47-2 |
| 63L | V-14-26 | 63DA | V-14-52 | 67C | II-47-4 |
| 63M | V-14-30 | 63DB | V-14-49 | 67D | II-47-8 |
| 63N | V-14-31 | 63DC | V-14-44 | 67E | II-47-10 |
| 63P | V-14-37 | 63DE | V-14-32 | 67F | II-47-3 |
| 63R | V-14-42 | 63DF | V-14-38 | 67G | II-47-7 |
| 63S | V-14-46 | 63DG | V-14-65 | 67H | II-47-13 |
| 63T | V-14-51 | 63DH | V-14-36 | 67J | II-47-5 |
| 63U | V-14-53 | 63DJ | V-14-64 | 67K | II-47-9 |
| 63W | V-14-59 | 63DK | V-14-62 | 67L | II-47-11 |
| 63Y | V-14-71 | 63DL | V-14-61 | 67M | II-47-1 |
| 63AA | V-14-40 | 63DM | V-14-67 | 67N | II-47-6 |
| 63AB | V-14-76 | 63DN | V-14-70 | 71A | II-49-1 |
| 63AC | V-14-66 | 63DP | V-14-3 | 71B | II-49-2 |
| 63AD | V-14-58 | 63DT | V-14-75 | 80A | V-19-11 |
| 63AE | V-14-41 | 63DU | V-14-9 | 80D | V-18-16 |
| 63AF | V-14-43 | 63DW | V-14-13 | 80E | V-18-19 |
| 63AG | V-14-33 | 63DY | V-15-1 | 80F | V-18-22 |
| 63AH | V-14-74 | 63EA | V-15-4 | 80G | V-19-1 |
| 63AK | V-14-27 | 63EB | V-15-6 | 80L | V-19-3 |
| 63AL | V-14-19 | 63EC | V-15-12 | 80R | V-19-9 |
| 63AM | V-14-34 | 63EF | V-14-2 | 80S | V-19-10 |
| 63AN | V-14-21 | 63EJ | V-15-10 | 80T | V-19-12 |
| 63AP | V-14-55 | 63EK | V-15-11 | 80W | V-19-13 |
| 63BB | V-15-8 | 63EN | V-15-3 | 80Y | V-19-14 |
| 63BF | V-15-7 | 63EP | V-15-2 | 80AA | V-19-15 |
| 63BH | V-14-47 | 63ES | V-14-6 | 80AC | V-19-16 |
| 63BJ | V-14-57 | 63EW | V-15-9 | 80AD | V-18-18 |
| 63BK | V-14-45 | 63FD | V-14-20 | 80AE | V-18-20 |
| 63BN | V-14-16 | 63FE | V-15-13 | 80AF | V-18-21 |
| 63BT | V-14-39 | 63FF | V-14-73 | 80AG | V-19-2 |
| 63BU | V-14-1 | 63FG | V-14-69 | 80AJ | V-19-6 |
| 63CE | V-15-5 | 63FH | V-14-35 | 80AK | V-19-7 |
| 63CH | V-14-68 | 63FJ | V-14-8 | 80AN | V-18-4 |
| 63CJ | V-14-29 | 63FK | V-14-10 | 80AT | V-18-11 |
| 63CK | V-14-56 | 63FL | V-14-25 | 80AY | V-18-43 |
| 63CL | V-14-17 | 64A | III-2-1 | 80BA | V-18-45 |
| 63CM | V-14-50 | 64B | III-2-2 | 80BB | V-18-23 |

CODED RESISTORS

| <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> |
|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|---------------------------------|
| 80BC | V-18-38 | 84B | II-53-5 | 89AL | VI-5-29 |
| 80BD | V-18-24 | 84C | II-53-6 | 89AM | VI-5-30 |
| 80BE | V-18-25 | 84D | II-53-3 | 89AN | VI-5-31 |
| 80BF | V-18-26 | 84E | II-53-1 | 89AP | VI-5-32 |
| 80 BG | V-18-27 | 84F | II-53-2 | 89AR | VI-5-33 |
| 80BH | V-18-28 | 84G | II-53-8 | 89AS | VI-5-34 |
| 80BK | V-18-42 | 84H | II-53-7 | 89AT | VI-5-35 |
| 80BL | V-18-29 | 85C | II-55-2 | 89AU | VI-6-1 |
| 80BM | V-18-30 | 85D | II-55-1 | 89AW | VI-6-2 |
| 80BN | V-18-31 | 88A | VI-2-1 | 89AY | VI-6-3 |
| 80BP | V-18-32 | 88B | VI-2-2 | 89BA | VI-6-4 |
| 80BR | V-18-33 | 88C | VI-2-3 | 89BB | VI-6-5 |
| 80BS | V-18-34 | 88D | VI-2-4 | 89BC | VI-6-6 |
| 80BT | V-18-35 | 88E | VI-2-5 | 89BD | VI-6-7 |
| 80BU | V-18-36 | 88F | VI-2-6 | 89BE | VI-6-8 |
| 80BY | V-18-37 | 89A | VI-11-10 | 89BF | VI-6-9 |
| 80CA | V-18-39 | 89B | VI-11-20 | 89BG | VI-6-10 |
| 80CB | V-18-40 | 89C | VI-5-1 | 89BH | VI-6-11 |
| 80CC | V-18-41 | 89D | VI-5-2 | 89BJ | VI-6-12 |
| 80CH | V-18-1 | 89E | VI-5-3 | 89BK | VI-6-13 |
| 80CJ | V-18-2 | 89F | VI-5-4 | 89BL | VI-6-14 |
| 80CK | V-18-3 | 89G | VI-5-5 | 89BM | VI-6-15 |
| 80CL | V-18-6 | 89H | VI-5-6 | 89BN | VI-6-16 |
| 80CM | V-18-9 | 89J | VI-5-7 | 89BP | VI-6-17 |
| 80CN | V-19-8 | 89K | VI-5-8 | 89BR | VI-6-18 |
| 80CP | V-18-13 | 89L | VI-5-9 | 89BS | VI-6-19 |
| 80CS | V-18-5 | 89M | VI-5-10 | 89BT | VI-6-20 |
| 80CT | V-18-8 | 89N | VI-5-11 | 89BU | VI-6-21 |
| 80CW | V-18-7 | 89P | VI-5-12 | 89BW | VI-6-22 |
| 80CY | V-18-10 | 89R | VI-5-13 | 89BY | VI-6-23 |
| 80DA | V-18-12 | 89S | VI-5-14 | 89CA | VI-6-24 |
| 80DB | V-18-14 | 89T | VI-5-15 | 89CB | VI-6-25 |
| 80DC | V-18-15 | 89U | VI-5-16 | 89CC | VI-6-26 |
| 80DD | V-18-17 | 89W | VI-5-17 | 89CD | VI-6-27 |
| 80DG | V-19-4 | 89Y | VI-5-18 | 89CE | VI-6-28 |
| 80DH | V-19-5 | 89AA | VI-5-19 | 89CF | VI-6-29 |
| 80DJ | V-18-44 | 89AB | VI-5-20 | 89CG | VI-6-30 |
| 82A | II-51-3 | 89AC | VI-5-21 | 89CH | VI-6-31 |
| 82B | II-51-2 | 89AD | VI-5-22 | 89CJ | VI-6-32 |
| 82C | II-51-6 | 89AE | VI-5-23 | 89CK | VI-6-33 |
| 82D | II-51-4 | 89AF | VI-5-24 | 89CL | VI-6-34 |
| 82E | II-51-7 | 89AG | VI-5-25 | 89CM | VI-6-35 |
| 82F | II-51-1 | 89AH | VI-5-26 | 89CN | VI-7-1 |
| 82G | II-51-5 | 89AJ | VI-5-27 | 89CP | VI-7-2 |
| 84A | II-53-4 | 89AK | VI-5-28 | 89CR | VI-7-3 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 89CS | VI-7-4 | 89FA | VI-9-23 | 92AB | II-28-13 |
| 89CT | VI-7-5 | 89FB | VI-9-24 | 92AD | II-26-14 |
| 89CU | VI-7-6 | 89FC | VI-10-38 | 92AE | II-26-40 |
| 89CW | VI-7-7 | 89FD | VI-8-6 | 92AG | II-25-5 |
| 89CY | VI-7-8 | 89FE | VI-8-7 | 92AH | II-25-3 |
| 89DA | VI-7-9 | 89FF | VI-8-8 | 92AJ | II-25-10 |
| 89DB | VI-7-10 | 89FG | VI-11-1 | 92AL | II-25-7 |
| 89DC | VI-7-11 | 89FH | VI-10-1 | 92AM | II-25-8 |
| 89DD | VI-7-12 | 89FJ | VI-10-2 | 92AN | II-25-23 |
| 89DE | VI-7-13 | 89FK | VI-10-3 | 92AP | II-25-61 |
| 89DF | VI-7-14 | 89FL | VI-10-4 | 92AR | II-25-71 |
| 89DG | VI-7-15 | 89FM | VI-10-5 | 92AS | II-27-2 |
| 89DH | VI-7-16 | 89FN | VI-10-20 | 92AT | II-28-18 |
| 89DJ | VI-7-17 | 89FP | VI-7-19 | 92AU | II-25-9 |
| 89DK | VI-7-18 | 89FR | VI-7-20 | 92AW | II-25-12 |
| 89DL | VI-10-35 | 89FS | VI-7-21 | 92AY | II-25-15 |
| 89DM | VI-8-1 | 89FT | VI-7-22 | 92BA | II-25-17 |
| 89DN | VI-8-2 | 89FU | VI-7-23 | 92BB | II-25-53 |
| 89DP | VI-8-3 | 89FW | VI-7-24 | 92BC | II-25-14 |
| 89DR | VI-8-4 | 89FY | VI-7-25 | 92BD | II-25-18 |
| 89DS | VI-8-5 | 89GA | VI-7-26 | 92BE | II-25-22 |
| 89DT | VI-10-36 | 89GB | VI-7-27 | 92BF | II-25-25 |
| 89DU | VI-9-1 | 89GC | VI-7-28 | 92BG | II-25-26 |
| 89DW | VI-9-2 | 89GD | VI-7-29 | 92BH | II-25-20 |
| 89DY | VI-9-3 | 89GE | VI-7-30 | 92BJ | II-25-16 |
| 89EA | VI-9-4 | 91A | II-57 | 92BM | II-25-67 |
| 89EB | VI-9-5 | 92A | II-25-42 | 92BP | II-25-63 |
| 89EC | VI-9-6 | 92B | II-25-40 | 92BR | II-25-55 |
| 89ED | VI-9-7 | 92C | II-26-16 | 92BS | II-25-64 |
| 89EE | VI-9-8 | 92D | II-26-32 | 92BT | II-25-58 |
| 89EF | VI-9-9 | 92E | II-27-1 | 92BU | II-25-59 |
| 89EG | VI-9-10 | 92F | II-25-44 | 92BW | II-25-52 |
| 89EH | VI-9-11 | 92G | II-26-31 | 92CD | II-25-62 |
| 89EJ | VI-9-12 | 92H | II-25-39 | 92CE | II-25-51 |
| 89EK | VI-10-37 | 92J | II-28-22 | 92CF | II-25-35 |
| 89EL | VI-9-13 | 92K | II-28-3 | 92CG | II-25-41 |
| 89EM | VI-9-14 | 92L | II-27-25 | 92CH | II-26-10 |
| 89EN | VI-9-15 | 92M | II-28-15 | 92CJ | II-26-35 |
| 89EP | VI-9-16 | 92N | II-25-19 | 92CK | II-26-24 |
| 89ER | VI-9-17 | 92P | II-25-37 | 92CL | II-26-18 |
| 89ES | VI-9-18 | 92R | II-25-47 | 92CS | II-26-12 |
| 89ET | VI-9-19 | 92S | II-25-49 | 92CT | II-26-19 |
| 89EU | VI-9-20 | 92T | II-25-43 | 92CU | II-26-36 |
| 89EW | VI-9-21 | 92W | II-27-16 | 92CW | II-26-28 |
| 89EY | VI-9-22 | 92AA | II-25-33 | 92CY | II-26-20 |

CODED RESISTORS

| <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> |
|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|---------------------------------|
| 92DE | II-26-25 | 92HS | II-30-11 | 92LM | II-26-17 |
| 92DF | II-26-29 | 92HT | II-30-10 | 92LN | II-26-6 |
| 92DS | II-26-7 | 92HU | II-30-9 | 92LP | II-27-37 |
| 92DT | II-26-11 | 92HW | II-25-69 | 92LR | II-25-24 |
| 92DU | II-26-26 | 92HY | II-28-30 | 92LS | II-25-68 |
| 92DW | II-26-38 | 92JB | II-27-10 | 92LT | II-32-4 |
| 92FJ | II-25-65 | 92JC | II-28-8 | 92LU | II-27-8 |
| 92FM | II-25-50 | 92JD | II-28-11 | 92LW | II-28-29 |
| 92FN | II-26-37 | 92JE | II-28-29 | 92LY | II-30-3 |
| 92FP | II-25-13 | 92JF | II-28-28 | 92MA | II-25-45 |
| 92FR | II-25-21 | 92JG | II-28-15 | 92MB | II-25-36 |
| 92FW | II-25-57 | 92JH | II-28-18 | 92MC | II-25-38 |
| 92GA | II-28-1 | 92JJ | II-31-6 | 92MD | II-29-1 |
| 92GB | II-28-31 | 92JK | II-32-5 | 92ME | II-29-2 |
| 92GC | II-28-16 | 92JL | II-30-5 | 92MF | II-29-3 |
| 92GD | II-27-38 | 92JM | II-26-39 | 92MG | II-29-5 |
| 92GE | II-26-21 | 92JN | II-31-4 | 92MH | II-29-6 |
| 92GG | II-26-23 | 92JR | II-32-6 | 92MJ | II-29-10 |
| 92GH | II-26-34 | 92JT | II-31-3 | 92MK | II-27-4 |
| 92GJ | II-25-30 | 92KA | II-28-24 | 92ML | II-31-9 |
| 92GK | II-27-13 | 92KB | II-28-24 | 92MM | II-25-54 |
| 92GL | II-28-5 | 92KF | II-28-26 | 92MN | II-27-7 |
| 92GM | II-27-9 | 92KG | II-26-33 | 92MP | II-32-8 |
| 92GN | II-28-6 | 92KJ | II-27-14 | 92MR | II-32-3 |
| 92GP | II-25-34 | 92KK | II-28-10 | 92MS | II-28-25 |
| 92GR | II-25-48 | 92KL | II-28-23 | 92MT | II-28-19 |
| 92GS | II-27-21 | 92KM | II-31-7 | 92MU | II-30-7 |
| 92GT | II-28-32 | 92KN | II-29-4 | 92MW | II-25-56 |
| 92GU | II-26-27 | 92KP | II-29-7 | 92MY | II-27-20 |
| 92GW | II-25-11 | 92KR | II-29-8 | 92NA | II-25-70 |
| 92HA | II-27-17 | 92KS | II-29-9 | 92NB | II-30-4 |
| 92HB | II-27-19 | 92KT | II-29-11 | 92NC | II-25-60 |
| 92HC | II-27-22 | 92KU | II-29-12 | 92ND | II-25-31 |
| 92HD | II-27-23 | 92KW | II-29-13 | 92NE | II-32-1 |
| 92HE | II-27-30 | 92KY | II-29-14 | 92NF | II-28-27 |
| 92HF | II-27-32 | 92LA | II-29-15 | 92NG | II-32-2 |
| 92HG | II-27-36 | 92LB | II-29-16 | 92NH | II-32-7 |
| 92HH | II-27-39 | 92LC | II-29-17 | 92NJ | II-27-6 |
| 92HJ | II-28-4 | 92LD | II-29-18 | 92NK | II-28-21 |
| 92HK | II-28-9 | 92LE | II-29-19 | 92NL | II-30-1 |
| 92HL | II-28-20 | 92LF | II-29-20 | 92NM | II-28-2 |
| 92HM | II-30-8 | 92LH | II-28-17 | 92NN | II-27-12 |
| 92HN | II-25-27 | 92LJ | II-26-22 | 92NP | II-30-11 |
| 92HP | II-25-66 | 92LK | II-27-35 | 92NR | II-29-24 |
| 92HR | II-30-12 | 92LL | II-26-15 | 92NS | II-27-34 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 92NT | II-27-27 | 98D | VI-13-4 | 104BC | V-35-19 |
| 92NU | II-25-46 | 98F | VI-13-5 | 104BD | V-35-13 |
| 92NW | II-27-26 | 100A | II-62-14 | 104BE | V-35-15 |
| 92NY | II-25-29 | 100B | II-62-13 | 104BF | V-35-17 |
| 92PA | II-27-33 | 100C | II-62-12 | 104BG | V-35-12 |
| 92PB | II-28-12 | 100D | II-63-1 | 104BH | V-35-22 |
| 92PC | II-27-40 | 100E | II-63-3 | 104BJ | V-35-24 |
| 92PD | II-25-32 | 100F | II-62-11 | 104BM | V-35-20 |
| 92PE | II-28-7 | 100G | II-62-1 | 104BN | V-35-6 |
| 92PF | II-25-28 | 100H | II-63-2 | 104BP | V-35-14 |
| 92PG | II-29-14 | 101AP | V-28-1 | 104BR | V-35-23 |
| 92PH | II-26-9 | 101BA | V-28-3 | 104BS | V-35-18 |
| 92PJ | II-25-6 | 101DP | V-29-1 | 104BT | V-35-21 |
| 92PK | II-26-8 | 101DY | V-29-16 | 104BU | V-35-25 |
| 92PL | II-26-2 | 101EA | V-29-18 | 104BY | V-35-2 |
| 92PM | II-25-2 | 101EB | V-29-17 | 104CA | V-35-4 |
| 92PN | II-26-4 | 101EC | V-29-15 | 104CB | V-35-8 |
| 92PP | II-25-4 | 101ED | V-28-2 | 104CC | V-35-3 |
| 92PR | II-26-3 | 101EE | V-30 | 104CD | V-35-1 |
| 92PS | II-26-1 | 101EF | V-29-40 | 104CE | V-35-26 |
| 92PT | II-25-1 | 101EG | V-29-41 | 104CF | V-35-7 |
| 92PU | II-26-5 | 101EH | V-28-33 | 104CG | V-35-11 |
| 92PW | II-26-13 | 101EJ | V-28-30 | 104CH | V-35-10 |
| 92PY | II-31-2 | 101EK | V-28-31 | 104CJ | V-35-16 |
| 92RA | II-31-10 | 101EL | V-28-32 | 105A | V-21 |
| 92RB | II-31-8 | 102A | V-32-19 | 105B | V-21 |
| 92RC | II-31-5 | 102B | V-32-18 | 106A | III-2-11 |
| 92RD | II-31-1 | 102C | V-33-2 | 106B | III-2-12 |
| 92RE | II-27-5 | 102D | V-32-7 | 106C | III-2-13 |
| 92RF | II-29-22 | 102F | V-33-1 | 106D | III-2-14 |
| 92RG | II-29-25 | 102G | V-33-3 | 107A | III-2-16 |
| 92RH | II-29-23 | 102J | V-32-15 | 107B | III-2-17 |
| 92RJ | II-29-21 | 102K | V-32-16 | 109A | V-24-27 |
| 92RK | II-27-3 | 102L | V-32-17 | 109B | V-24-28 |
| 92RL | II-27-11 | 102M | V-32-14 | 109C | V-24-29 |
| 92RM | II-26-30 | 102N | V-32-20 | 109D | V-24-30 |
| 92RN | II-27-31 | 102P | V-32-10 | 109E | V-24-31 |
| 92RP | II-30-2 | 102T | V-33-18 | 109F | V-24-32 |
| 92RR | II-30-6 | 102U | V-33-22 | 109G | V-24-33 |
| 92RS | II-29-26 | 102W | V-33-14 | 109H | V-24-34 |
| 92RT | II-28-28 | 102Y | V-33-37 | 109L | V-24-1 |
| 96A | II-59 | 102AA | V-32-3 | 109M | V-25-2 |
| 98A | VI-13-1 | 102AB | V-32-1 | 109N | V-25-3 |
| 98B | VI-13-2 | 104AC | V-35-5 | 109P | V-24-14 |
| 98C | VI-13-3 | 104AD | V-35-9 | 109R | V-25-1 |

CODED RESISTORS

| <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> | <u>Code No.</u> | <u>Section, Page & Line</u> |
|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|---------------------------------|
| 109S | V-24-2 | 120J | II-34-3 | 123AR | II-38-3 |
| 109T | V-24-3 | 120K | II-34-4 | 123AS | II-37-10 |
| 109U | V-25-21 | 120L | II-34-6 | 123AT | II-38-4 |
| 109W | V-25-20 | 120M | II-33-6 | 124A | V-47 |
| 109Y | V-24-4 | 120N | II-34-26 | 125A | VI-21 |
| 109AA | V-24-15 | 120AB | II-33-1 | 126A | V-49-1 |
| 109AB | V-24-16 | 120AC | II-34-1 | 126C | V-49-2 |
| 113A | VI-17 | 120AD | II-34-2 | 127A | VI-24 |
| 114A | VI-17 | 120AE | II-34-5 | 128A | V-41 |
| 114B | VI-17 | 120AF | II-33-5 | 129A | V-41 |
| 115A | V-37-1 | 120AG | II-33-4 | 130A | V-51 |
| 115B | V-37-14 | 123A | II-35-1 | 131A | V-49 |
| 115C | V-37-22 | 123B | II-36-17 | 131B | V-49 |
| 115D | V-37-15 | 123C | II-36-15 | 132A | VI-24 |
| 115E | V-37-16 | 123D | II-36-12 | 135A | VI-25 |
| 115F | V-37-18 | 123E | II-36-9 | 136A | III-2-19 |
| 115G | V-37-19 | 123F | II-36-6 | 136B | III-2-20 |
| 115H | V-37-21 | 123G | II-36-13 | 136C | III-2-21 |
| 115J | V-37-36 | 123H | II-36-10 | 137A | III-2-23 |
| 115K | V-37-29 | 123J | II-36-7 | 137B | III-2-24 |
| 115L | V-37-20 | 123K | II-36-4 | 137C | III-2-25 |
| 115M | V-37-17 | 123L | II-36-2 | 138A | III-2-27 |
| 115N | V-37-3 | 123M | II-36-1 | 138C | III-2-28 |
| 115P | V-38-2 | 123N | II-36-16 | 139A | V-43 |
| 115R | V-37-35 | 123P | II-36-14 | 143A | III-2-30 |
| 115S | V-37-37 | 123R | II-36-11 | 143B | III-2-31 |
| 115T | V-37-33 | 123S | II-36-8 | 144A | III-10-1 |
| 115U | V-37-31 | 123T | II-36-5 | 144B | III-10-3 |
| 115W | V-37-32 | 123U | II-36-3 | 144C | III-10-4 |
| 115Y | V-37-30 | 123W | II-37-4 | 144E | III-10-5 |
| 115AA | V-37-28 | 123Y | II-37-3 | 144F | III-10-7 |
| 115AB | V-37-23 | 123AA | II-37-6 | 144G | III-10-8 |
| 115AC | V-37-24 | 123AB | II-37-7 | 145A | III-10-11 |
| 115AD | V-37-25 | 123AC | II-35-6 | 145B | III-10-13 |
| 115AE | V-37-26 | 123AD | II-35-2 | 145C | III-10-14 |
| 115AF | V-37-27 | 123AE | II-37-5 | 145E | III-10-15 |
| 115AG | V-37-4 | 123AF | II-38-1 | 146A | III-10-18 |
| 115AH | V-37-2 | 123AG | II-37-2 | 146B | III-10-20 |
| 115AJ | V-37-38 | 123AH | II-37-9 | 146C | III-10-21 |
| 115AK | V-37-34 | 123AJ | II-37-8 | 146E | III-10-22 |
| 115AL | V-38-1 | 123AK | II-35-4 | 147A | III-10-26 |
| 116A | VI-19 | 123AL | II-35-3 | 147B | III-10-28 |
| 119A | II-65 | 123AM | II-35-5 | 147C | III-10-29 |
| 120G | II-33-2 | 123AN | II-37-1 | 147D | III-10-30 |
| 120H | II-33-3 | 123AP | II-38-2 | 147E | III-10-32 |

CODED RESISTORS

| Code No. | Section, Page & Line | Code No. | Section, Page & Line | Code No. | Section, Page & Line |
|----------|----------------------|----------|----------------------|----------|----------------------|
| 147F | III-10-33 | 225A | V-47 | | |
| 148A | VI-27 | 226A | III-23 | | |
| 148B | VI-27 | 227A | III-2-38 | | |
| 149A | III-10-36 | 227C | III-2-39 | | |
| 149B | III-10-38 | 227D | III-2-40 | | |
| 150A | III-10-41 | 227E | III-2-41 | | |
| 151A | III-10-44 | 228A | III-2-43 | | |
| 152A | III-10-47 | 228D | III-2-44 | | |
| 153A | III-12-1 | 234A | II-67-1 | | |
| 154A | III-12-4 | 234B | II-67-2 | | |
| 202A | V-54-1 | 234C | II-67-3 | | |
| 206A | III-12-7 | 234D | II-67-4 | | |
| 207A | III-12-10 | 234E | II-67-5 | | |
| 208A | III-12-13 | 234F | II-67-7 | | |
| 209A | III-12-17 | 234G | II-67-10 | | |
| 210A | V-54-14 | 234H | II-67-11 | | |
| 210B | V-54-15 | 234J | II-67-14 | | |
| 211A | V-54-30 | 234K | II-67-6 | | |
| 211B | V-54-31 | 234L | II-67-12 | | |
| 211C | V-54-32 | 234M | II-67-13 | | |
| 211D | V-54-33 | 234N | II-67-9 | | |
| 211E | V-54-34 | 234P | II-67-8 | | |
| 211F | V-54-35 | 235A | II-67-15 | | |
| 211G | V-54-36 | 235B | II-67-16 | | |
| 211H | V-54-37 | 235C | II-67-17 | | |
| 211J | V-54-38 | 235D | II-67-18 | | |
| 211K | V-54-39 | 235E | II-67-19 | | |
| 211L | V-54-40 | 235F | II-67-20 | | |
| 212A | V-40-4 | 235G | II-67-21 | | |
| 212B | V-40-3 | 236A | II-69 | | |
| 213A | V-40-1 | 237A | III-12-34 | | |
| 213B | V-40-2 | 238A | III-12-37 | | |
| 213C | V-40-5 | 241D | III-2-46 | | |
| 214A | V-40 | 242C | III-2-48 | | |
| 215A | V-55 | 244A | III-4-1 | | |
| 216A | III-2-33 | 244B | III-4-2 | | |
| 217A | III-2-35 | 245B | III-4-4 | | |
| 217C | III-2-36 | 246A | III-25 | | |
| 218A | III-22 | 246B | III-25 | | |
| 218B | III-22 | 246C | III-25 | | |
| 218C | III-22 | 246D | III-25 | | |
| 219A | V-57 | 248C | III-4-6 | | |
| 220A | V-57 | 254A | III-24 | | |
| 221A | III-12-21 | 254C | III-24 | | |
| 221B | III-12-23 | 254J | III-24 | | |
| 222A | III-12-25 | 6145C | III-12-40 | | |
| 223A | III-12-29 | | | | |
| 223B | III-12-31 | | | | |
| 224A | V-47 | | | | |
| 224B | V-47 | | | | |

KS-SPECIFICATION RESISTORS

| KS- No. | Section, Page & Line | KS- No. | Section, Page & Line | KS- No. | Section, Page & Line |
|-------------------|-------------------------|------------|-------------------------|------------|-------------------------|
| * 8441 | IV-2-1 * | 8512L42 | IV-4-44 | 13609L5 | IV-2-32 |
| * 8451 | IV-2-3 * | 8512L43 | IV-4-45 | 13609L6 | IV-2-33 |
| * 8452 | IV-2-5 * | 8512L44 | IV-5-1 | 13609L7 | IV-2-34 |
| 8512 | IV-2-5 | 8512L45 | IV-5-2 | 13653 | IV-2-37 |
| 8512L1 | IV-4-1 | 8512L46 | IV-5-3 | 13657L1 | IV-2-41 |
| 8512L2 | IV-4-2 | 8512L47 | IV-5-4 | 13657L2 | IV-2-42 |
| 8512L3 | IV-4-3 | 8512L48 | IV-5-5 | 13657L3 | IV-2-43 |
| 8512L4 | IV-4-4 | 8512L49 | IV-5-6 | 13657L4 | IV-2-44 |
| 8512L5 | IV-4-5 | 8512L50 | IV-4-7 | 13809L1 | IV-2-47 |
| 8512L6 | IV-4-6 | 8512L51 | IV-4-13 | 13809L2 | IV-2-48 |
| 8512L7 | IV-4-8 | 8512L52 | IV-5-9 | 13809L3 | IV-2-49 |
| 8512L8 | IV-4-9 | 8512L53 | IV-5-10 | 14175L1 | IV-6-1 |
| 8512L9 | IV-4-10 | 8512L54 | IV-5-11 | 14175L2 | IV-6-2 |
| 8512L10 | IV-4-11 | 8512L55 | IV-5-12 | 14175L3 | IV-6-3 |
| 8512L11 | IV-4-12 | 8512L56 | IV-5-13 | 14175L4 | IV-6-4 |
| 8512L12 | IV-4-14 | 8512L57 | IV-5-14 | 14175L5 | IV-6-5 |
| 8512L13 | IV-4-15 | 8512L58 | IV-5-15 | 14175L6 | IV-6-6 |
| 8512L14 | IV-4-16 | 8512L59 | IV-5-16 | 14272L1 | IV-6-9 |
| 8512L15 | IV-4-17 | 8512L60 | IV-5-17 | 14272L2 | IV-6-10 |
| 8512L16 | IV-4-18 | 8512L61 | IV-5-18 | 14603L1 | IV-6-14 |
| 8512L17 | IV-4-19 | 8512L62 | IV-5-19 | 14603L2 | IV-6-15 |
| 8512L18 | IV-4-20 | 8512L63 | IV-5-20 | 14603L3 | IV-6-16 |
| 8512L19 | IV-4-21 | 8512L64 | IV-5-21 | 14603L4 | IV-6-17 |
| 8512L20 | IV-4-22 | 8512L65 | IV-5-22 | 14603L5 | IV-6-18 |
| 8512L21 | IV-4-23 | 9913 | IV-2-13 | 14603L6 | IV-6-19 |
| 8512L22 | IV-4-24 | 9914 | IV-2-17 | 16073L1 | IV-6-22 |
| 8512L23 | IV-4-25 | 13192L1 | IV-2-21 | 16073L2 | IV-6-23 |
| 8512L24 | IV-4-26 | 13192L2 | IV-2-22 | 16073L3 | IV-6-24 |
| 8512L25 | IV-4-27 | 13192L3 | IV-2-23 | 16073L4 | IV-6-25 |
| 8512L26 | IV-4-28 | 13192L4 | IV-2-24 | 16122 | IV-6-27 |
| 8512L27 | IV-4-29 | 13192L5 | IV-2-25 | 16125 | IV-6-31 |
| 8512L28 | IV-4-30 | 13192L6 | IV-2-26 | 16266L1 | IV-6-34 |
| 8512L29 | IV-4-31 | 13490L1 | IV-12-1 | 16266L2 | IV-6-35 |
| 8512L30 | IV-4-32 | 13490L2 | IV-12-2 | 16266L3 | IV-6-36 |
| 8512L31 | IV-4-33 | 13490L3 | IV-12-3 | 16311L1 | IV-16-1 |
| 8512L32 | IV-4-34 | 13491L1 | IV-12-6 | 16311L2 | IV-16-2 |
| 8512L33 | IV-4-35 | 13491L2 | IV-12-7 | 16311L3 | IV-16-3 |
| 8512L34 | IV-4-36 | 13491L3 | IV-12-8 | 16311L4 | IV-16-4 |
| 8512L35 | IV-4-37 | 13492L1 | IV-12-11 | 16311L5 | IV-16-5 |
| 8512L36 | IV-4-38 | 13492L2 | IV-12-12 | 16311L6 | IV-16-6 |
| 8512L37 | IV-4-39 | 13492L3 | IV-12-13 | 16312L1 | IV-16-9 |
| 8512L38 | IV-4-40 | 13609L1 | IV-2-28 | 16312L2 | IV-16-10 |
| 8512L39 | IV-4-41 | 13609L2 | IV-2-29 | 16312L3 | IV-16-11 |
| 8512L40 | IV-4-42 | 13609L3 | IV-2-30 | 16312L4 | IV-16-12 |
| 8512L41 | IV-4-43 | 13609L4 | IV-2-31 | 16312L5 | IV-16-13 |

* MANUFACTURE DISCONTINUED

KS-SPECIFICATION RESISTORS

| <u>KS- No.</u> | <u>Section,Page & Line</u> | <u>KS- No.</u> | <u>Section,Page & Line</u> | <u>KS- No.</u> | <u>Section,Page & Line</u> |
|--------------------|------------------------------------|--------------------|------------------------------------|--------------------|------------------------------------|
| 16312L6 | IV-16-14 | 19113L4 | IV-20-11 | | |
| 16313L1 | IV-16-17 | 19113L5 | IV-20-13 | | |
| 16313L2 | IV-16-18 | 19150L1 | IV-12-25 | | |
| 16313L3 | IV-16-19 | 19150L2 | IV-12-26 | | |
| 16313L4 | IV-16-20 | 19150L3 | IV-12-27 | | |
| 16313L5 | IV-16-21 | 19151L1 | IV-12-30 | | |
| 16313L6 | IV-16-22 | 19151L2 | IV-12-31 | | |
| 16314L1 | IV-16-25 | 19151L3 | IV-12-32 | | |
| 16314L2 | IV-16-26 | 19152L1 | IV-12-35 | | |
| 16314L3 | IV-16-27 | 19152L2 | IV-12-36 | | |
| 16314L4 | IV-16-28 | 19152L3 | IV-12-37 | | |
| 16314L5 | IV-16-29 | 19238L1 | IV-8-22 | | |
| 16314L6 | IV-16-30 | 19238L2 | IV-8-23 | | |
| 16315L1 | IV-16-33 | 19238L3 | IV-8-24 | | |
| 16315L2 | IV-16-34 | 19238L4 | IV-8-25 | | |
| 16315L3 | IV-16-35 | 19238L5 | IV-8-26 | | |
| 16315L4 | IV-16-36 | 19238L6 | IV-8-27 | | |
| 16315L5 | IV-16-37 | 19238L7 | IV-8-28 | | |
| 16315L6 | IV-16-38 | 19238L8 | IV-8-29 | | |
| 16340L1 | IV-6-42 | 19548L1 | IV-8-32 | | |
| 16340L2 | IV-6-43 | 19756L1 | IV-20-17 | | |
| 16340L3 | IV-6-44 | 19756L2 | IV-20-18 | | |
| 16340L4 | IV-6-45 | 19756L3 | IV-20-19 | | |
| 16340L5 | IV-6-46 | 19769L1 | IV-8-37 | | |
| 16543 | IV-6-49 | 19769L2 | IV-8-38 | | |
| 16645L1 | IV-10-16 | 19769L3 | IV-8-39 | | |
| 16645L2 | IV-10-17 | 19863L1 | IV-8-44 | | |
| 16645L3 | IV-10-18 | 19863L2 | IV-8-45 | | |
| 16764L1 | IV-8-1 | 19949L1 | IV-8-48 | | |
| 16764L2 | IV-8-4 | | | | |
| 16764L3 | IV-8-5 | | | | |
| 16764L4 | IV-8-7 | | | | |
| 16764L5 | IV-8-9 | | | | |
| 16764L6 | IV-8-10 | | | | |
| 16814L1 | IV-8-12 | | | | |
| 16814L2 | IV-8-13 | | | | |
| 16822L1 | IV-8-15 | | | | |
| 16896L1 | IV-20-1 | | | | |
| 16907L1 | IV-8-19 | | | | |
| 16907L2 | IV-8-20 | | | | |
| 19077L1 | IV-12-21 | | | | |
| 19077L2 | IV-12-22 | | | | |
| 19113L1 | IV-20-5 | | | | |
| 19113L2 | IV-20-7 | | | | |
| 19113L3 | IV-20-9 | | | | |

|| POWER TYPES
SPECIFIC CODE


II SPECIFIC CODE

DESCRIPTION

The resistors have one winding on a metal card. Heat resistant insulating material is used over the winding. The terminals and mounting stud pass through the mounting panel from which they are insulated by sleeves which are integral parts of the molded phenolic terminal head assembly. Terminals are tinned and are arranged for mechanically wrapped connections. Closest recommended mounting centers are $7/16$ inch by $1-3/4$ inches.

The power rating at 150°F ambient temperature is 5.1 watts for normal operating conditions and 12 watts for trouble conditions. They are derated to 0 watts at 250°F ambient temperature for normal conditions and 275°F ambient temperature for trouble conditions.

The maximum voltage across the resistor shall not exceed 350 volts.

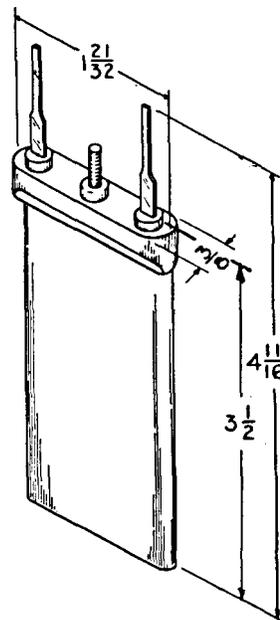

| Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE $\pm 5\%$ or as shown | Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE $\pm 5\%$ or as shown |
|----------|----------|-----------------|---------------------------------|----------|----------|-----------------|---------------------------------|
| 1 | 18HH | 0.3 | ± 2 | 26 | 18JT | 13.5 | $\pm .25$ |
| 2 | 18HJ | 0.5 | ± 2 | 27 | 18DJ | 15.0 | ± 1 |
| 3 | 18CS | 0.6 | | 28 | 18DY | 17.1 | ± 2 |
| 4 | 18CU | 0.8 | ± 3 | 29 | 18DP | 18.75 | $\pm .5$ |
| 5 | 18KW | 1.1 | ± 1 | 30 | 18BE | 20.0 | ± 1 |
| 6 | 18CH | 1.2 | ± 1 | 31 | 18S | 20.0 | |
| 7 | 18CW | 1.6 | ± 3 | 32 | 18JL | 21.34 | $\pm .25$ |
| 8 | 18HK | 1.8 | ± 1 | 33 | 18FU | 22.0 | ± 1 |
| 9 | 18HL | 2.0 | ± 1 | 34 | 18EG | 22.0 | |
| 10 | 18BB | 2.0 | | 35 | 18DK | 25.0 | ± 1 |
| 11 | 18AY | 2.4 | ± 3 | 36 | 18J | 30.0 | |
| 12 | 18HM | 2.9 | ± 1 | 37 | 18A | 37.0 | |
| 13 | 18GC | 3.2 | | 38 | 18HP | 38.0 | $\pm .1$ |
| 14 | 18GR | 3.5 | ± 2 | 39 | 18KM | 38.0 | ± 1 |
| 15 | 18AL | 4.0 | | 40 | 18AW | 40.0 | ± 1 |
| 16 | 18GS | 4.5 | ± 2 | 41 | 18B | 40.0 | |
| 17 | 18CJ | 5.0 | | 42 | 18FF | 43.2 | ± 2 |
| 18 | 18GW | 5.4 | ± 1 | 43 | 18AB | 45.0 | |
| 19 | 18FT | 6.0 | ± 1 | 44 | 18GB | 50.0 | ± 1 |
| 20 | 18KG | 6.8 | | 45 | 18T | 50.0 | |
| 21 | 18GU | 8.0 | ± 1 | 46 | 18M | 53.0 | |
| 22 | 18FW | 8.0 | | 47 | 18FH | 56.0 | |
| 23 | 18R | 10.0 | | 48 | 18BR | 60.0 | ± 1 |
| 24 | 18HN | 12.0 | $\pm .25$ | 49 | 18AK | 60.0 | |
| 25 | 18DD | 12.0 | ± 4 | 50 | 18Z | 67.0 | |

18-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE ±5% or as shown | Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE ±5% or as shown |
|----------|----------|-----------------|---------------------------|----------|----------|-----------------|---------------------------|
| 1 | 18JJ | 67.65 | ±.1 | 41 | 18FD | 210.0 | ±1 |
| 2 | 18JS | 67.65 | ±.25 | 42 | 18H | 210.0 | |
| 3 | 18FE | 68.0 | ±2 | 43 | 18JG | 220.4 | ±.1 |
| 4 | 18ET | 70.0 | | 44 | 18JR | 220.4 | ±.25 |
| 5 | 18DM | 72.4 | ±2 | 45 | 18AG | 226.0 | |
| 6 | 18ED | 75.0 | ±1 | 46 | 18AD | 240.0 | |
| 7 | 18K | 80.0 | | 47 | 18HU | 245.5 | ±.1 |
| 8 | 18C | 83.0 | | 48 | 18AM | 250.0 | |
| 9 | 18EB | 84.0 | ±1 | 49 | 18LA | 250.0 | ±1 |
| 10 | 18BS | 90.0 | ±1 | 50 | 18JH | 268.1 | ±.1 |
| 11 | 18Y | 90.0 | | 51 | 18FA | 270.0 | ±1 |
| 12 | 18AA | 95.0 | | 52 | 18EJ | 270.0 | |
| 13 | 18BW | 100.0 | ±1 | 53 | 18HW | 281.6 | ±.1 |
| 14 | 18U | 100.0 | | 54 | 18JN | 282.8 | ±.25 |
| 15 | 18Q | 110.0 | | 55 | 18BF | 284.0 | |
| 16 | 18DL | 111.0 | ±2 | 56 | 18JK | 289.5 | ±.1 |
| 17 | 18EL | 112.0 | ±1 | 57 | 18DF | 290.0 | |
| 18 | 18DW | 112.5 | ±2 | 58 | 18HY | 294.0 | ±.1 |
| 19 | 18HR | 119.4 | ±.1 | 59 | 18JA | 296.0 | ±.1 |
| 20 | 18EP | 120.0 | ±1 | 60 | 18HD | 300.0 | ±.1 |
| 21 | 18D | 120.0 | | 61 | 18BU | 300.0 | ±1 |
| 22 | 18GJ | 121.0 | ±.5 | 62 | 18AF | 300.0 | |
| 23 | 18HS | 121.2 | ±.1 | 63 | 18AH | 320.0 | |
| 24 | 18EE | 128.0 | ±1 | 64 | 18DC | 325.0 | ±1 |
| 25 | 18P | 130.0 | | 65 | 18BN | 340.0 | ±1 |
| 26 | 18ER | 133.0 | ±1 | 66 | 18AS | 350.0 | ±1 |
| 27 | 18W | 133.0 | | 67 | 18AN | 350.0 | |
| 28 | 18JP | 135.0 | ±1 | 68 | 18KH | 367.5 | ±1 |
| 29 | 18E | 140.0 | | 69 | 18AU | 380.0 | ±1 |
| 30 | 18GD | 142.0 | ±1 | 70 | 18AR | 380.0 | |
| 31 | 18F | 150.0 | | 71 | 18BG | 400.0 | ±1 |
| 32 | 18HT | 155.8 | ±.1 | 72 | 18AJ | 400.0 | |
| 33 | 18L | 170.0 | | 73 | 18JB | 421.6 | ±.1 |
| 34 | 18N | 180.0 | | 74 | 18GK | 422.0 | ±.5 |
| 35 | 18JM | 190.2 | ±.1 | 75 | 18DG | 426.0 | ±1 |
| 36 | 18KL | 195.1 | ±.25 | 76 | 18CK | 440.0 | |
| 37 | 18BT | 200.0 | ±1 | 77 | 18BC | 470.0 | |
| 38 | 18G | 200.0 | | 78 | 18JY | 480.0 | ±1 |
| 39 | 18GP | 208.0 | ±1 | 79 | 18EU | 500.0 | ±.5 |
| 40 | 18JF | 209.4 | ±.1 | 80 | 18AP | 500.0 | ±1 |
| | | | | 81 | 18AC | 500.0 | |
| | | | | 82 | 18FY | 510.0 | ±1 |
| | | | | 83 | 18HG | 540.0 | ±.1 |
| | | | | 84 | 18GY | 540.0 | ±1 |
| | | | | 85 | 18KD | 568.0 | |

Phenolic Insulation - 18-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE ±5 % or as shown | Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE ±5% or as shown |
|----------|----------|-----------------|----------------------------|----------|----------|-----------------|---------------------------|
| 1 | 18GG | 575.0 | ±1 | 41 | 18FN | 1900.0 | ±1 |
| 2 | 18HF | 580.0 | ±.1 | 42 | 18JU | 1920.0 | ±1 |
| 3 | 18BD | 580.0 | ±1 | 43 | 18CR | 2000.0 | ±1 |
| 4 | 18JC | 600.0 | ±.1 | 44 | 18BA | 2000.0 | |
| 5 | 18GH | 600.0 | ±1 | 45 | 18KP | 2053.0 | ±1 |
| 6 | 18AE | 600.0 | | 46 | 18HB | 2200.0 | ±1 |
| 7 | 18BY | 605.0 | ±.5 | 47 | 18EH | 2400.0 | |
| 8 | 18CF | 610.0 | ±1 | 48 | 18EF | 2500.0 | |
| 9 | 18FL | 620.0 | ±1 | 49 | 18KA | 2583.0 | ±1 |
| 10 | 18EN | 630.0 | | 50 | 18GM | 2755.0 | ±2 |
| 11 | 18KC | 670.0 | ±1 | 51 | 18EK | 2898.0 | ±1 |
| 12 | 18KE | 700.0 | ±1 | 52 | 18HC | 3000.0 | ±2 |
| 13 | 18DH | 700.0 | | 53 | 18DB | 3000.0 | |
| 14 | 18DR | 750.0 | ±1 | 54 | 18JE | 3050.0 | ±1 |
| 15 | 18BL | 750.0 | | 55 | 18DU | 3100.0 | ±1 |
| 16 | 18GF | 800.0 | ±1 | 56 | 18FK | 3150.0 | |
| 17 | 18CN | 800.0 | | 57 | 18FR | 3200.0 | ±1 |
| 18 | 18KR | 887.0 | ±1 | 58 | 18DN | 3200.0 | |
| 19 | 18FB | 900.0 | | 59 | 18KT | 3458.0 | ±1 |
| 20 | 18DE | 930.0 | ±1 | 60 | 18FC | 4000.0 | |
| 21 | 18CB | 955.0 | ±1 | 61 | 18FS | 4250.0 | ±1 |
| 22 | 18BM | 1000.0 | ±1 | 62 | 18KU | 4500.0 | ±1 |
| 23 | 18BH | 1000.0 | | 63 | 18KB | 4800.0 | ±.5 |
| 24 | 18HA | 1070.0 | ±1 | 64 | 18ES | 4800.0 | |
| 25 | 18KS | 1108.0 | ±1 | 65 | 18FJ | 5000.0 | ±3 |
| 26 | 18JD | 1194.0 | ±.1 | 66 | 18EW | 5000.0 | |
| 27 | 18KY | 1200.0 | ±1 | 67 | 18GT | 5243.0 | |
| 28 | 18BJ | 1200.0 | | 68 | 18GL | 5545.0 | ±2 |
| 29 | 18CP | 1260.0 | ±1 | 69 | 18EC | 6000.0 | |
| 30 | 18BK | 1300.0 | ±1 | 70 | 18FP | 6350.0 | |
| 31 | 18GN | 1340.0 | ±2 | 71 | 18KJ | 6500.0 | |
| 32 | 18KN | 1449.0 | ±1 | 72 | 18HE | 7835.0 | ±1 |
| 33 | 18CT | 1481.0 | ±1 | 73 | 18FG | 8080.0 | |
| 34 | 18DA | 1510.0 | ±1 | 74 | 18EM | 8600.0 | |
| 35 | 18CY | 1585.0 | ±1 | 75 | 18EA | 9000.0 | |
| 36 | 18GE | 1600.0 | ±1 | 76 | 18KF | 10000.0 | ±1 |
| 37 | 18AT | 1600.0 | | 77 | 18JW | 10000.0 | |
| 38 | 18DS | 1700.0 | ±1 | | | | |
| 39 | 18KK | 1725.0 | ±1 | | | | |
| 40 | 18EY | 1800.0 | | | | | |

DESCRIPTION

The resistors have two windings on a metal card, one winding superimposed on the other. Heat resistant material is used over the metal card, between the windings, and over the outer winding. The terminals and mounting stud pass through the mounting panel from which they are insulated by sleeves which are integral parts of the molded phenolic terminal head assembly. The mounting stud has an extension the same size and shape as the outer ends of the terminals and serves as a common terminal for the two windings. Terminals are tinned and are arranged for mechanically wrapped connections. The closest recommended mounting centers are $7/16$ inch by $1-3/4$ inch.


The power rating at 150°F ambient temperature is 5.1 watts for the two resistor sections in combination or 5 watts for either section provided that the other section is used at not more than $1/10$ watt. The corresponding rating for trouble conditions is 12 watts at 75°F . They are derated to 0 watts in an ambient temperature of 250°F for normal operating conditions and 275°F ambient temperature for trouble conditions.

The maximum voltage across the resistor shall not exceed 350 volts.

NOTES: (These notes apply to the tables following.)

- R. 5.1 watts maximum distributed over the two resistor sections in combination or 5 watts for either section provided that the other section is used at no more than $1/10$ watt.
- S. Normal power rating of the high resistance section is equal to the difference between the power dissipation in low resistance section, up to its normal power rating, and 5.1 watts.

ON THE FOLLOWING PAGES ALL 19-TYPE RESISTORS ARE LISTED IN ASCENDING NUMERICAL ORDER OF RESISTANCE VALUE OF EACH WINDING. THEREFORE, EACH RESISTOR IS LISTED TWICE.

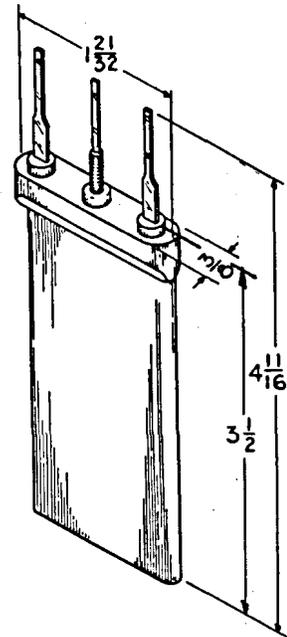

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19ABN | 0.20 | 0.55 | 0.77 | | R | R |
| 2 | 19DM | 0.20 | 0.40 | 0.60 | ±10 | R | R |
| 3 | 19DB | 0.225 | 0.225 | 0.45 | ±10 | R | R |
| 4 | 19DP | 0.25 | 0.50 | 0.75 | | R | R |
| 5 | 19DM | 0.40 | 0.20 | 0.60 | ±10 | R | R |
| 6 | 19DP | 0.50 | 0.25 | 0.75 | | R | R |
| 7 | 19KW | 0.50 | 1.00 | 1.50 | | R | R |
| 8 | 19ABN | 0.55 | 0.20 | 0.77 | | R | R |
| 9 | 19TG | 0.60 | 1.20 | 1.80 | ±4.2 | R | R |
| 10 | 19BL | 1.00 | 1.00 | 2.00 | | R | R |
| 11 | 19DR | 1.00 | 2.00 | 3.00 | | R | R |
| 12 | 19KW | 1.00 | 0.50 | 1.50 | | R | R |
| 13 | 19LU | 1.00 | 8.00 | 9.00 | | (S)1.7 | (S)3.4 |
| 14 | 19UC | 1.00 | 3.00 | 4.00 | | (S)3.8 | (S)1.3 |
| 15 | 19TG | 1.20 | 0.60 | 1.80 | ±4.2 | R | R |
| 16 | 19UW | 1.20 | 9.60 | 10.80 | | (S)1.7 | (S)3.4 |
| 17 | 19DR | 2.00 | 1.00 | 3.00 | | R | R |
| 18 | 19KU | 2.00 | 4.00 | 6.00 | | R | R |
| 19 | 19UT | 2.00 | 6.00 | 8.00 | | (S)3.8 | (S)1.3 |
| 20 | 19TH | 2.40 | 4.80 | 7.20 | ±1 | R | R |
| 21 | 19AW | 2.50 | 2.50 | 5.00 | | R | R |
| 22 | 19LW | 3.00 | 8.00 | 11.00 | | (S)4.2 | (S)0.9 |
| 23 | 19UC | 3.00 | 1.00 | 4.00 | | (S)1.3 | (S)3.8 |
| 24 | 19MF | 3.50 | 10.00 | 13.50 | ±1 | (S)4.0 | (S)1.1 |
| 25 | 19KU | 4.00 | 2.00 | 6.00 | | R | R |
| 26 | 19TY | 4.00 | 93.00 | 97.00 | ±1 | (S)0.6 | (S)4.5 |
| 27 | 19TH | 4.80 | 2.40 | 7.20 | ±1 | R | R |
| 28 | 19N | 5.00 | 8.00 | 13.00 | | R | R |
| 29 | 19UT | 6.00 | 2.00 | 8.00 | | (S)1.3 | (S)3.8 |
| 30 | 19PA | 7.00 | 11.00 | 18.00 | | R | R |
| 31 | 19WB | 7.80 | 2345.00 | 2352.80 | ±1 | (S)0.1 | (S)5.0 |
| 32 | 19GG | 7.90 | 7.90 | 15.80 | ±2 | R | R |
| 33 | 19N | 8.00 | 5.00 | 13.00 | | R | R |
| 34 | 19LU | 8.00 | 1.00 | 9.00 | | (S)3.4 | (S)1.7 |
| 35 | 19LW | 8.00 | 3.00 | 11.00 | | (S)0.9 | (S)4.2 |
| 36 | 19WS | 8.00 | 16.00 | 24.00 | | R | R |
| 37 | 19ER | 9.50 | 9.50 | 19.00 | ±.5 | R | R |
| 38 | 19UW | 9.60 | 1.20 | 10.80 | | (S)3.4 | (S)1.7 |
| 39 | 19J | 10.00 | 40.00 | 50.00 | | (S)3.0 | (S)2.1 |
| 40 | 19W | 10.00 | 10.00 | 20.00 | | R | R |
| 41 | 19BT | 10.00 | 640.00 | 650.00 | ±1 | (S)0.2 | (S)4.9 |
| 42 | 19HP | 10.00 | 40.00 | 50.00 | ±1 | (S)3.1 | (S)2.0 |
| 43 | 19MF | 10.00 | 3.50 | 13.50 | ±1 | (S)1.1 | (S)4.0 |
| 44 | 19NJ | 11.00 | 11.00 | 22.00 | ±1 | R | R |
| 45 | 19PA | 11.00 | 7.00 | 18.00 | | R | R |

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | Total | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|---------------------------------|--------------|--------|
| | | Wdg. | Wdg. | | | Wdg. | Wdg. |
| 1 | 19RU | 11.80 | 17.70 | 29.50 | | R | R |
| 2 | 19GU | 13.00 | 31.00 | 44.00 | | (S)4.5 | (S)0.6 |
| 3 | 19FB | 13.50 | 15.00 | 28.50 | ±1 | R | R |
| 4 | 19RW | 13.60 | 17.65 | 31.25 | ±.5 | R | R |
| 5 | 19EF | 14.00 | 14.00 | 28.00 | ±1 | R | R |
| 6 | 19KD | 14.00 | 54.00 | 68.00 | ±1 | (S)3.1 | (S)2.0 |
| 7 | 19UM | 14.00 | 84.00 | 98.00 | ±1 | (S)2.2 | (S)2.9 |
| 8 | 19Y | 15.00 | 15.00 | 30.00 | | R | R |
| 9 | 19EK | 15.00 | 30.00 | 45.00 | ±1 | R | R |
| 10 | 19FB | 15.00 | 13.50 | 28.50 | ±1 | R | R |
| 11 | 19GW | 15.00 | 17.00 | 32.00 | ±1 | R | R |
| 12 | 19LS | 16.00 | 17.00 | 33.00 | ±1 | R | R |
| 13 | 19WS | 16.00 | 8.00 | 24.00 | | R | R |
| 14 | 19FD | 17.00 | 19.50 | 36.50 | ±1 | R | R |
| 15 | 19GW | 17.00 | 15.00 | 32.00 | ±1 | R | R |
| 16 | 19LS | 17.00 | 16.00 | 33.00 | ±1 | R | R |
| 17 | 19YP | 17.20 | 17.20 | 34.40 | ±1 | R | R |
| 18 | 19TK | 17.30 | 34.40 | 51.70 | ±1 | R | R |
| 19 | 19RW | 17.65 | 13.60 | 31.25 | ±.5 | R | R |
| 20 | 19RU | 17.70 | 11.80 | 29.50 | | R | R |
| 21 | 19GY | 18.00 | 19.00 | 37.00 | ±1 | R | R |
| 22 | 19KE | 18.00 | 39.00 | 57.00 | ±1 | (S)2.5 | (S)2.6 |
| 23 | 19GY | 19.00 | 18.00 | 37.00 | ±1 | R | R |
| 24 | 19KF | 19.00 | 37.00 | 56.00 | ±1 | R | R |
| 25 | 19FD | 19.50 | 17.00 | 36.50 | ±1 | R | R |
| 26 | 19M | 20.00 | 20.00 | 40.00 | | R | R |
| 27 | 19P | 20.00 | 130.00 | 150.00 | | (S)2.0 | (S)3.1 |
| 28 | 19BN | 20.00 | 185.00 | 205.00 | ±1 | (S)3.5 | (S)1.6 |
| 29 | 19BS | 20.00 | 400.00 | 420.00 | ±1 | (S)0.7 | (S)4.4 |
| 30 | 19EB | 20.00 | 330.00 | 350.00 | | (S)0.9 | (S)4.2 |
| 31 | 19HC | 20.00 | 93.00 | 113.00 | ±1 | (S)2.7 | (S)2.4 |
| 32 | 19HU | 20.00 | 280.00 | 300.00 | ±1 | (S)1.0 | (S)4.1 |
| 33 | 19HY | 20.00 | 630.00 | 650.00 | ±1 | (S)0.9 | (S)4.2 |
| 34 | 19JB | 20.00 | 150.00 | 170.00 | ±1 | (S)1.8 | (S)3.3 |
| 35 | 19MG | 20.00 | 5590.00 | 5610.00 | ±1 | (S)0.1 | (S)5.0 |
| 36 | 19AAJ | 20.00 | 55.00 | 75.00 | ±1 | (S)4.1 | (S)1.0 |
| 37 | 19NR | 21.50 | 64.00 | 85.50 | | (S)3.9 | (S)1.2 |
| 38 | 19FE | 22.00 | 25.00 | 47.00 | ±1 | R | R |
| 39 | 19NC | 22.00 | 22.00 | 44.00 | ±1 | R | R |
| 40 | 19MH | 22.40 | 6400.00 | 6422.40 | ±1 | (S)0.1 | (S)5.0 |
| 41 | 19SC | 23.80 | 90.80 | 114.60 | (a) | (S)3.2 | (S)1.9 |
| 42 | 19T | 25.00 | 25.00 | 50.00 | | R | R |
| 43 | 19FE | 25.00 | 22.00 | 47.00 | ±1 | R | R |
| 44 | 19NS | 25.00 | 50.00 | 75.00 | ±1 | R | R |
| 45 | 19PT | 25.40 | 25.40 | 50.80 | ±.5 | R | R |

(a) ±.25 for 23.8, ±.1 for 90.8

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19YR | 25.90 | 25.90 | 51.80 | ±1 | R | R |
| 2 | 19NA | 27.00 | 221.00 | 248.00 | ±1 | (S)1.7 | (S)3.4 |
| 3 | 19FC | 28.50 | 32.00 | 60.50 | ±1 | R | R |
| 4 | 19E | 30.00 | 30.00 | 60.00 | | R | R |
| 5 | 19BE | 30.00 | 90.00 | 120.00 | | (S)3.8 | (S)1.3 |
| 6 | 19EK | 30.00 | 15.00 | 45.00 | ±1 | R | R |
| 7 | 19HR | 30.00 | 200.00 | 230.00 | ±1 | (S)2.0 | (S)3.1 |
| 8 | 19HS | 30.00 | 170.00 | 200.00 | ±1 | (S)2.3 | (S)2.8 |
| 9 | 19NY | 30.00 | 30.00 | 60.00 | ±1 | R | R |
| 10 | 19PH | 30.00 | 60.00 | 90.00 | ±1 | R | R |
| 11 | 19GU | 31.00 | 13.00 | 44.00 | | (S)0.6 | (S)4.5 |
| 12 | 19FC | 32.00 | 28.50 | 60.50 | ±1 | R | R |
| 13 | 19EJ | 33.00 | 35.00 | 68.00 | ±1 | R | R |
| 14 | 19ET | 33.00 | 950.00 | 983.00 | ±1 | (S)0.6 | (S)4.5 |
| 15 | 19CT | 34.00 | 400.00 | 434.00 | | (S)1.2 | (S)3.9 |
| 16 | 19DE | 34.00 | 986.00 | 1020.00 | ±1 | (S)0.5 | (S)4.6 |
| 17 | 19TK | 34.40 | 17.30 | 51.70 | ±1 | R | R |
| 18 | 19LR | 34.50 | 34.50 | 69.00 | ±1 | R | R |
| 19 | 19EJ | 35.00 | 33.00 | 68.00 | ±1 | R | R |
| 20 | 19ES | 35.00 | 38.00 | 73.00 | ±1 | R | R |
| 21 | 19FA | 36.50 | 41.00 | 77.50 | ±1 | R | R |
| 22 | 19A | 37.00 | 37.00 | 74.00 | | R | R |
| 23 | 19KF | 37.00 | 19.00 | 56.00 | ±1 | R | R |
| 24 | 19LJ | 37.00 | 37.00 | 74.00 | ±1 | R | R |
| 25 | 19WU | 37.00 | 74.00 | 110.00 | ±1 | R | R |
| 26 | 19ABH | 37.00 | 1800.00 | 1837.00 | ±1 | (S)0.3 | (S)4.8 |
| 27 | 19EH | 38.00 | 950.00 | 988.00 | ±1 | (S)0.6 | (S)4.5 |
| 28 | 19ES | 38.00 | 35.00 | 73.00 | ±1 | R | R |
| 29 | 19KE | 39.00 | 18.00 | 57.00 | ±1 | (S)2.6 | (S)2.5 |
| 30 | 19B | 40.00 | 40.00 | 80.00 | | R | R |
| 31 | 19C | 40.00 | 83.00 | 123.00 | | R | R |
| 32 | 19F | 40.00 | 60.00 | 100.00 | | R | R |
| 33 | 19G | 40.00 | 100.00 | 140.00 | | (S)4.4 | (S)0.7 |
| 34 | 19H | 40.00 | 120.00 | 160.00 | | (S)3.8 | (S)1.3 |
| 35 | 19J | 40.00 | 10.00 | 50.00 | | (S)2.1 | (S)3.0 |
| 36 | 19AL | 40.00 | 68.00 | 108.00 | | R | R |
| 37 | 19BK | 40.00 | 500.00 | 540.00 | | (S)1.1 | (S)4.0 |
| 38 | 19CS | 40.00 | 125.00 | 165.00 | ±1 | (S)3.7 | (S)1.4 |
| 39 | 19HP | 40.00 | 10.00 | 50.00 | ±1 | (S)2.0 | (S)3.1 |
| 40 | 19HW | 40.00 | 50.00 | 90.00 | ±1 | R | R |
| 41 | 19JK | 40.00 | 170.00 | 210.00 | ±1 | (S)2.9 | (S)2.2 |
| 42 | 19NB | 40.00 | 44.00 | 84.00 | ±1 | R | R |
| 43 | 19WC | 40.00 | 210.00 | 250.00 | | (S)2.4 | (S)2.7 |
| 44 | 19FA | 41.00 | 36.50 | 77.50 | ±1 | R | R |
| 45 | 19HA | 42.00 | 195.00 | 237.00 | ±1 | (S)2.7 | (S)2.4 |

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19RS | 42.00 | 1000.00 | 1042.00 | ±1 | (S)0.6 | (S)4.5 |
| 2 | 19WW | 43.00 | 43.00 | 86.00 | ±1 | R | R |
| 3 | 19MJ | 43.40 | 3210.00 | 3253.40 | ±1 | (S)0.2 | (S)4.9 |
| 4 | 19MK | 44.00 | 3480.00 | 3524.00 | ±1 | (S)0.2 | (S)4.9 |
| 5 | 19NB | 44.00 | 40.00 | 84.00 | ±1 | R | R |
| 6 | 19ND | 44.00 | 44.00 | 88.00 | ±1 | R | R |
| 7 | 19KC | 47.00 | 59.00 | 106.00 | ±1 | R | R |
| 8 | 19JU | 48.00 | 300.00 | 348.00 | ±1 | (S)2.1 | (S)3.0 |
| 9 | 19AM | 50.00 | 50.00 | 100.00 | | R | R |
| 10 | 19AY | 50.00 | 2000.00 | 2050.00 | | (S)0.4 | (S)4.7 |
| 11 | 19BC | 50.00 | 300.00 | 350.00 | | (S)2.2 | (S)2.9 |
| 12 | 19DL | 50.00 | 70.00 | 120.00 | ±1 | R | R |
| 13 | 19HB | 50.00 | 194.00 | 244.00 | ±1 | (S)3.1 | (S)2.0 |
| 14 | 19HW | 50.00 | 40.00 | 90.00 | ±1 | R | R |
| 15 | 19LY | 50.00 | 550.00 | 600.00 | ±1 | (S)1.3 | (S)3.8 |
| 16 | 19NL | 51.40 | 51.40 | 102.80 | ±1 | R | R |
| 17 | 19NS | 50.00 | 25.00 | 75.00 | ±1 | R | R |
| 18 | 19TN | 50.00 | 400.00 | 450.00 | ±1 | (S)1.7 | (S)3.4 |
| 19 | 19ST | 52.80 | 1754.00 | 1806.80 | ±1 | (S)0.4 | (S)4.7 |
| 20 | 19GT | 53.00 | 111.00 | 164.00 | ±1 | R | R |
| 21 | 19KD | 54.00 | 14.00 | 68.00 | ±1 | (S)2.0 | (S)3.1 |
| 22 | 19ED | 55.00 | 218.00 | 273.00 | ±1 | (S)3.1 | (S)2.0 |
| 23 | 19NF | 55.00 | 500.00 | 555.00 | | (S)1.5 | (S)3.6 |
| 24 | 19AAJ | 55.00 | 20.00 | 75.00 | ±1 | (S)1.0 | (S)4.1 |
| 25 | 19KC | 59.00 | 47.00 | 106.00 | ±1 | R | R |
| 26 | 19F | 60.00 | 40.00 | 100.00 | | R | R |
| 27 | 19L | 60.00 | 60.00 | 120.00 | | R | R |
| 28 | 19S | 60.00 | 90.00 | 150.00 | | R | R |
| 29 | 19AC | 60.00 | 83.00 | 143.00 | | R | R |
| 30 | 19AR | 60.00 | 260.00 | 320.00 | | (S)2.9 | (S)2.2 |
| 31 | 19AU | 60.00 | 170.00 | 230.00 | | (S)4.0 | (S)1.1 |
| 32 | 19CK | 60.00 | 65.00 | 125.00 | ±1 | R | R |
| 33 | 19CM | 60.00 | 1235.00 | 1295.00 | ±1 | (S)0.7 | (S)4.4 |
| 34 | 19FH | 60.00 | 70.00 | 130.00 | ±1 | R | R |
| 35 | 19JR | 60.00 | 400.00 | 460.00 | | (S)2.0 | (S)3.1 |
| 36 | 19PH | 60.00 | 30.00 | 90.00 | ±1 | R | R |
| 37 | 19WY | 60.00 | 60.00 | 120.00 | ±1 | R | R |
| 38 | 19ABF | 60.40 | 140.00 | 200.40 | ±1 | (S)4.6 | (S)0.5 |
| 39 | 19PN | 62.00 | 62.00 | 124.00 | ±1 | R | R |
| 40 | 19JW | 64.00 | 252.00 | 316.00 | ±1 | (S)3.1 | (S)2.0 |
| 41 | 19NR | 64.00 | 21.50 | 85.50 | | (S)1.2 | (S)3.9 |
| 42 | 19CK | 65.00 | 60.00 | 125.00 | ±1 | R | R |
| 43 | 19WK | 65.00 | 160.00 | 225.00 | ±1 | (S)4.4 | (S)0.7 |
| 44 | 19EP | 66.00 | 220.30 | 286.30 | ±2 | (S)3.5 | (S)1.6 |
| 45 | 19KS | 67.00 | 67.00 | 134.00 | | R | R |

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19LD | 67.00 | 67.00 | 134.00 | ±1 | R | R |
| 2 | 19AL | 68.00 | 40.00 | 108.00 | | R | R |
| 3 | 19MS | 69.60 | 5245.00 | 5314.60 | ±1 | (S)0.1 | (S)5.0 |
| 4 | 19AK | 70.00 | 70.00 | 140.00 | | R | R |
| 5 | 19DL | 70.00 | 50.00 | 120.00 | ±1 | R | R |
| 6 | 19FF | 70.00 | 100.00 | 170.00 | ±1 | R | R |
| 7 | 19FH | 70.00 | 60.00 | 130.00 | ±1 | R | R |
| 8 | 19KA | 70.00 | 685.00 | 755.00 | ±1 | (S)1.4 | (S)3.7 |
| 9 | 19LK | 73.00 | 73.00 | 146.00 | ±1 | R | R |
| 10 | 19WU | 74.00 | 37.00 | 111.00 | ±1 | R | R |
| 11 | 19GC | 75.00 | 110.00 | 185.00 | ±1 | R | R |
| 12 | 19YS | 76.00 | 76.00 | 152.00 | ±1 | R | R |
| 13 | 19GB | 80.00 | 85.00 | 165.00 | ±1 | R | R |
| 14 | 19JJ | 80.00 | 80.00 | 160.00 | ±1 | R | R |
| 15 | 19MD | 80.00 | 600.00 | 680.00 | | (S)1.8 | (S)3.3 |
| 16 | 19RR | 80.00 | 1000.00 | 1080.00 | ±1 | (S)1.1 | (S)4.0 |
| 17 | 19C | 83.00 | 40.00 | 123.00 | | R | R |
| 18 | 19D | 83.00 | 83.00 | 166.00 | | R | R |
| 19 | 19AC | 83.00 | 60.00 | 143.00 | | R | R |
| 20 | 19KM | 84.00 | 6350.00 | 6434.00 | | (S)0.2 | (S)4.9 |
| 21 | 19LG | 84.00 | 84.00 | 168.00 | ±1 | R | R |
| 22 | 19UM | 84.00 | 14.00 | 98.00 | ±1 | (S)2.9 | (S)2.2 |
| 23 | 19GB | 85.00 | 80.00 | 165.00 | ±1 | R | R |
| 24 | 19KT | 85.00 | 1800.00 | 1885.00 | | (S)0.7 | (S)4.4 |
| 25 | 19UL | 85.00 | 845.00 | 930.00 | ±1 | (S)1.4 | (S)3.7 |
| 26 | 19WN | 85.00 | 185.00 | 270.00 | ±1 | (S)4.8 | (S)0.3 |
| 27 | 19YY | 87.60 | 4204.00 | 4291.60 | ±1 | (S)0.3 | (S)4.8 |
| 28 | 19S | 90.00 | 60.00 | 150.00 | | R | R |
| 29 | 19BE | 90.00 | 30.00 | 120.00 | | (S)1.3 | (S)3.8 |
| 30 | 19FK | 90.00 | 110.00 | 200.00 | ±1 | R | R |
| 31 | 19JA | 90.00 | 130.00 | 220.00 | ±1 | R | R |
| 32 | 19SC | 90.80 | 23.80 | 114.60 | (a) | (S)1.9 | (S)3.2 |
| 33 | 19EE | 91.00 | 208.00 | 299.00 | | (S)4.7 | (S)0.4 |
| 34 | 19YT | 92.00 | 92.00 | 184.00 | ±1 | R | R |
| 35 | 19HC | 93.00 | 20.00 | 113.00 | ±1 | (S)2.4 | (S)2.7 |
| 36 | 19TY | 93.00 | 4.00 | 97.00 | ±1 | (S)4.5 | (S)0.6 |
| 37 | 19GS | 95.00 | 190.00 | 285.00 | | R | R |
| 38 | 19MM | 97.00 | 1740.00 | 1837.00 | ±1 | (S)0.8 | (S)4.3 |
| 39 | 19DK | 97.00 | 120.00 | 217.00 | ±1 | R | R |
| 40 | 19GR | 98.00 | 586.00 | 684.00 | | (S)2.2 | (S)2.9 |
| 41 | 19G | 100.00 | 40.00 | 140.00 | | (S)0.7 | (S)4.4 |
| 42 | 19K | 100.00 | 100.00 | 200.00 | | R | R |
| 43 | 19BD | 100.00 | 380.00 | 480.00 | | (S)3.2 | (S)1.9 |
| 44 | 19BH | 100.00 | 500.00 | 600.00 | | (S)2.5 | (S)2.6 |
| 45 | 19CH | 100.00 | 125.00 | 225.00 | ±1 | R | R |

(a) ±.25 for 23.80, ±.1 for 90.8

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19CN | 100.00 | 200.00 | 300.00 | | R | R |
| 2 | 19DN | 100.00 | 100.00 | 200.00 | ±1 | R | R |
| 3 | 19DU | 100.00 | 1000.00 | 1100.00 | | (S)1.4 | (S)3.7 |
| 4 | 19FF | 100.00 | 70.00 | 170.00 | ±1 | R | R |
| 5 | 19FG | 100.00 | 100.00 | 200.00 | ±1 | R | R |
| 6 | 19JF | 100.00 | 220.00 | 320.00 | ±1 | (S)4.8 | (S)0.3 |
| 7 | 19LC | 100.00 | 100.00 | 200.00 | ±.25 | R | R |
| 8 | 19NP | 100.00 | 390.00 | 490.00 | (b) | (S)3.1 | (S)2.0 |
| 9 | 19NU | 100.00 | 200.00 | 300.00 | ±1 | R | R |
| 10 | 19RB | 100.00 | 1300.00 | 1400.00 | ±1 | (S)1.1 | (S)4.0 |
| 11 | 19RJ | 100.00 | 600.00 | 700.00 | ±1 | (S)2.2 | (S)2.9 |
| 12 | 19TD | 100.00 | 175.00 | 275.00 | ±1 | R | R |
| 13 | 19UD | 100.00 | 900.00 | 1000.00 | ±1 | (S)1.4 | (S)3.7 |
| 14 | 19UY | 100.00 | 350.00 | 450.00 | ±1 | (S)3.4 | (S)1.7 |
| 15 | 19PC | 102.60 | 3509.00 | 3611.60 | ±.5 | (S)0.4 | (S)4.7 |
| 16 | 19KB | 104.00 | 141.00 | 245.00 | ±1 | R | R |
| 17 | 19ML | 105.00 | 1685.00 | 1790.00 | ±1 | (S)0.9 | (S)4.2 |
| 18 | 19WA | 105.00 | 105.00 | 210.00 | ±1 | R | R |
| 19 | 19YC | 105.70 | 3509.00 | 3614.70 | ±1 | (S)0.5 | (S)4.6 |
| 20 | 19FJ | 110.00 | 130.00 | 240.00 | ±1 | R | R |
| 21 | 19FK | 110.00 | 90.00 | 200.00 | ±1 | R | R |
| 22 | 19GC | 110.00 | 75.00 | 185.00 | ±1 | R | R |
| 23 | 19HM | 110.00 | 900.00 | 1010.00 | ±1 | (S)1.7 | (S)3.4 |
| 24 | 19HN | 110.00 | 540.00 | 650.00 | ±1 | (S)2.6 | (S)2.5 |
| 25 | 19GT | 111.00 | 53.00 | 164.00 | ±1 | R | R |
| 26 | 19HH | 112.00 | 1000.00 | 1112.00 | | (S)1.7 | (S)3.4 |
| 27 | 19HJ | 112.00 | 2600.00 | 2712.00 | | (S)0.6 | (S)4.5 |
| 28 | 19MA | 112.00 | 615.00 | 727.00 | | (S)2.4 | (S)2.7 |
| 29 | 19EA | 115.00 | 115.00 | 230.00 | ±1 | R | R |
| 30 | 19DJ | 117.00 | 903.00 | 1020.00 | ±1 | (S)1.7 | (S)3.4 |
| 31 | 19JT | 118.00 | 175.00 | 293.00 | ±1 | R | R |
| 32 | 19H | 120.00 | 40.00 | 160.00 | | (S)1.3 | (S)3.8 |
| 33 | 19Z | 120.00 | 120.00 | 240.00 | | R | R |
| 34 | 19AB | 120.00 | 210.00 | 330.00 | | R | R |
| 35 | 19AG | 120.00 | 160.00 | 280.00 | | R | R |
| 36 | 19CU | 120.00 | 1050.00 | 1170.00 | ±1 | (S)1.5 | (S)3.6 |
| 37 | 19CW | 120.00 | 122.00 | 242.00 | ±1 | R | R |
| 38 | 19DK | 120.00 | 97.00 | 217.00 | ±1 | R | R |
| 39 | 19EL | 120.00 | 120.00 | 240.00 | | R | R |
| 40 | 19ABE | 120.00 | 280.00 | 400.00 | ±1 | (S)4.6 | (S)0.5 |
| 41 | 19MY | 120.50 | 539.00 | 659.50 | ±1 | (S)2.8 | (S)2.3 |
| 42 | 19CW | 122.00 | 120.00 | 242.00 | ±1 | R | R |
| 43 | 19DF | 122.00 | 158.00 | 280.00 | ±1 | R | R |
| 44 | 19AAA | 124.20 | 3019.00 | 3143.20 | ±1 | (S)0.5 | (S)4.6 |
| 45 | 19CB | 125.00 | 345.00 | 470.00 | ±1 | (S)4.1 | (S)1.0 |

(b) ±5 for 100.0, ±1 for 390.0.

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19CD | 125.00 | 1095.00 | 1220.00 | ±1 | (S)1.6 | (S)3.5 |
| 2 | 19CE | 125.00 | 510.00 | 635.00 | ±1 | (S)3.0 | (S)2.1 |
| 3 | 19CH | 125.00 | 100.00 | 225.00 | ±1 | R | R |
| 4 | 19CL | 125.00 | 895.00 | 1020.00 | ±1 | (S)1.9 | (S)3.2 |
| 5 | 19CS | 125.00 | 40.00 | 165.00 | ±1 | (S)1.4 | (S)3.7 |
| 6 | 19EM | 125.00 | 170.00 | 295.00 | ±1 | R | R |
| 7 | 19PK | 125.00 | 250.00 | 375.00 | ±1 | R | R |
| 8 | 19PP | 125.00 | 125.00 | 250.00 | ±1 | R | R |
| 9 | 19RA | 125.00 | 660.00 | 785.00 | ±1 | (S)2.4 | (S)2.7 |
| 10 | 19TT | 129.00 | 129.00 | 258.00 | ±1 | R | R |
| 11 | 19P | 130.00 | 20.00 | 150.00 | | (S)3.1 | (S)2.0 |
| 12 | 19FJ | 130.00 | 110.00 | 240.00 | ±1 | R | R |
| 13 | 19FY | 130.00 | 150.00 | 280.00 | ±1 | R | R |
| 14 | 19JA | 130.00 | 90.00 | 220.00 | ±1 | R | R |
| 15 | 19MT | 131.60 | 2472.00 | 2603.60 | ±1 | (S)0.8 | (S)4.3 |
| 16 | 19BU | 132.00 | 158.00 | 290.00 | ±1 | R | R |
| 17 | 19DG | 133.00 | 770.00 | 903.00 | ±1 | (S)2.2 | (S)2.9 |
| 18 | 19NN | 135.00 | 280.00 | 415.00 | | R | R |
| 19 | 19TP | 135.00 | 135.00 | 270.00 | ±1 | R | R |
| 20 | 19AF | 140.00 | 140.00 | 280.00 | | R | R |
| 21 | 19HT | 140.00 | 420.00 | 560.00 | ±1 | (S)3.8 | (S)1.3 |
| 22 | 19RY | 140.00 | 840.00 | 980.00 | | (S)2.3 | (S)2.8 |
| 23 | 19ABF | 140.00 | 60.40 | 200.40 | ±1 | (S)0.5 | (S)4.6 |
| 24 | 19KB | 141.00 | 104.00 | 245.00 | ±1 | R | R |
| 25 | 19YU | 143.00 | 2652.00 | 2795.00 | ±1 | (S)0.8 | (S)4.3 |
| 26 | 19LL | 145.00 | 145.00 | 290.00 | ±1 | R | R |
| 27 | 19LT | 145.00 | 150.00 | 295.00 | ±1 | R | R |
| 28 | 19PM | 145.00 | 500.00 | 645.00 | ±.5 | (S)3.4 | (S)1.7 |
| 29 | 19KN | 146.00 | 651.00 | 797.00 | ±2 | (S)2.8 | (S)2.3 |
| 30 | 19AD | 150.00 | 150.00 | 300.00 | | R | R |
| 31 | 19DT | 150.00 | 300.00 | 450.00 | | R | R |
| 32 | 19FS | 150.00 | 190.00 | 340.00 | ±1 | R | R |
| 33 | 19FY | 150.00 | 130.00 | 280.00 | ±1 | R | R |
| 34 | 19JB | 150.00 | 20.00 | 170.00 | ±1 | (S)3.3 | (S)1.8 |
| 35 | 19LB | 150.00 | 150.00 | 300.00 | ±1 | R | R |
| 36 | 19LT | 150.00 | 145.00 | 295.00 | ±1 | R | R |
| 37 | 19NH | 150.00 | 6350.00 | 6500.00 | | (S)0.3 | (S)4.8 |
| 38 | 19SL | 150.00 | 250.00 | 400.00 | ±1 | R | R |
| 39 | 19KK | 152.00 | 3160.00 | 3312.00 | ±2 | (S)0.7 | (S)4.4 |
| 40 | 19NM | 156.00 | 156.00 | 312.00 | ±1 | R | R |
| 41 | 19PL | 156.00 | 156.00 | 312.00 | ±.5 | R | R |
| 42 | 19BU | 158.00 | 132.00 | 290.00 | ±1 | R | R |
| 43 | 19DF | 158.00 | 122.00 | 280.00 | ±1 | R | R |
| 44 | 19DD | 159.00 | 1500.00 | 1659.00 | ±1 | R | R |
| 45 | 19AG | 160.00 | 120.00 | 280.00 | | R | R |

| Line No. | CODE NO. | RESISTANCE - | | Phenolic Insulation - 19-Type RESISTOR | | RATING-WATTS | |
|----------|----------|--------------|---------|--|---------------------------|--------------|--------|
| | | Wdg. | Wdg. | OHMS Total | TOLERANCE ±5% or as shown | Wdg. | Wdg. |
| 1 | 19JH | 160.00 | 850.00 | 1010.00 | ±1 | (S)2.4 | (S)2.7 |
| 2 | 19KG | 160.00 | 2990.00 | 3150.00 | ±2 | (S)0.8 | (S)4.3 |
| 3 | 19WK | 160.00 | 65.00 | 225.00 | ±1 | (S)0.7 | (S)4.4 |
| 3 | 19AAB | 162.50 | 2368.00 | 2530.50 | ±1 | (S)1.0 | (S)4.1 |
| 5 | 19WF | 165.00 | 165.00 | 330.00 | ±1 | R | R |
| 6 | 19RF | 168.00 | 2140.00 | 2308.00 | ±.5 | (S)1.1 | (S)4.0 |
| 7 | 19UK | 168.00 | 168.00 | 336.00 | ±1 | R | R |
| 8 | 19AS | 170.00 | 170.00 | 340.00 | | R | R |
| 9 | 19AU | 170.00 | 60.00 | 230.00 | | (S)1.1 | (S)4.0 |
| 10 | 19EM | 170.00 | 125.00 | 295.00 | ±1 | R | R |
| 11 | 19EN | 170.00 | 175.00 | 345.00 | ±1 | R | R |
| 12 | 19HS | 170.00 | 30.00 | 200.00 | ±1 | (S)2.8 | (S)2.3 |
| 13 | 19JK | 170.00 | 40.00 | 210.00 | ±1 | (S)2.2 | (S)2.9 |
| 14 | 19EN | 175.00 | 170.00 | 345.00 | ±1 | R | R |
| 15 | 19JT | 175.00 | 118.00 | 293.00 | ±1 | R | R |
| 16 | 19TD | 175.00 | 100.00 | 275.00 | ±1 | R | R |
| 17 | 19AP | 180.00 | 180.00 | 360.00 | | R | R |
| 18 | 19FU | 180.00 | 220.00 | 400.00 | ±1 | R | R |
| 19 | 19NE | 180.00 | 265.00 | 445.00 | | R | R |
| 20 | 19SU | 180.00 | 360.00 | 540.00 | ±1 | R | R |
| 21 | 19WE | 180.00 | 180.00 | 360.00 | ±1 | R | R |
| 22 | 19UP | 182.00 | 182.00 | 364.00 | ±1 | R | R |
| 23 | 19YW | 182.00 | 2142.00 | 2324.00 | ±1 | (S)1.2 | (S)3.9 |
| 24 | 19BN | 185.00 | 20.00 | 205.00 | ±1 | (S)1.6 | (S)3.5 |
| 25 | 19CA | 185.00 | 770.00 | 955.00 | ±1 | (S)3.0 | (S)2.1 |
| 26 | 19WN | 185.00 | 85.00 | 270.00 | ±1 | (S)0.3 | (S)4.8 |
| 27 | 19FP | 190.00 | 230.00 | 420.00 | ±1 | R | R |
| 28 | 19FS | 190.00 | 150.00 | 340.00 | ±1 | R | R |
| 29 | 19GS | 190.00 | 95.00 | 285.00 | | R | R |
| 30 | 19SK | 190.20 | 190.20 | 380.40 | ±.5 | R | R |
| 31 | 19MN | 191.00 | 920.00 | 1111.00 | ±1 | (S)2.6 | (S)2.5 |
| 32 | 19HB | 194.00 | 50.00 | 244.00 | ±1 | (S)2.0 | (S)3.1 |
| 33 | 19HA | 195.00 | 42.00 | 237.00 | ±1 | (S)2.4 | (S)2.7 |
| 34 | 19UR | 198.00 | 198.00 | 386.00 | ±1 | R | R |
| 35 | 19PD | 199.40 | 1806.00 | 2005.40 | ±.5 | (S)1.5 | (S)3.6 |
| 36 | 19AJ | 200.00 | 200.00 | 400.00 | | R | R |
| 37 | 19BG | 200.00 | 400.00 | 600.00 | | R | R |
| 38 | 19CN | 200.00 | 100.00 | 300.00 | | R | R |
| 39 | 19HR | 200.00 | 30.00 | 230.00 | ±1 | (S)3.1 | (S)2.0 |
| 40 | 19NU | 200.00 | 100.00 | 300.00 | ±1 | R | R |
| 41 | 19PY | 200.00 | 600.00 | 800.00 | | (S)3.8 | (S)1.3 |
| 42 | 19SM | 200.00 | 650.00 | 850.00 | ±1 | (S)3.6 | (S)1.5 |
| 43 | 19WT | 200.00 | 300.00 | 500.00 | ±1 | R | R |
| 44 | 19AAH | 200.00 | 200.00 | 400.00 | ±1 | R | R |
| 45 | 19AAC | 203.00 | 1958.00 | 2161.00 | ±1 | (S)1.4 | (S)3.7 |

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19BR | 205.00 | 225.00 | 430.00 | ±1 | R | R |
| 2 | 19EE | 208.00 | 91.00 | 299.00 | | (S)0.4 | (S)4.7 |
| 3 | 19MP | 209.00 | 890.00 | 1099.00 | ±1 | (S)2.2 | (S)2.9 |
| 4 | 19SF | 209.40 | 209.40 | 418.80 | ±.5 | R | R |
| 5 | 19AB | 210.00 | 120.00 | 330.00 | | R | R |
| 6 | 19NK | 210.00 | 320.00 | 530.00 | | R | R |
| 7 | 19RK | 210.00 | 210.00 | 420.00 | ±1 | R | R |
| 8 | 19SY | 210.00 | 400.00 | 610.00 | ±1 | R | R |
| 9 | 19UF | 210.00 | 3900.00 | 4110.00 | ±1 | (S)0.8 | (S)4.3 |
| 10 | 19UG | 210.00 | 3100.00 | 3310.00 | ±1 | (S)1.0 | (S)4.1 |
| 11 | 19WC | 210.00 | 40.00 | 250.00 | | (S)2.7 | (S)2.4 |
| 12 | 19AAE | 210.00 | 326.00 | 536.00 | ±1 | R | R |
| 13 | 19PB | 217.00 | 217.00 | 434.00 | ±1 | R | R |
| 14 | 19WJ | 217.90 | 217.90 | 435.80 | ±.5 | R | R |
| 15 | 19ED | 218.00 | 55.00 | 273.00 | ±1 | (S)2.0 | (S)3.1 |
| 16 | 19BY | 220.00 | 1075.00 | 1295.00 | ±1 | (S)2.6 | (S)2.5 |
| 17 | 19FU | 220.00 | 180.00 | 400.00 | ±1 | R | R |
| 18 | 19JF | 220.00 | 100.00 | 320.00 | ±1 | (S)0.3 | (S)4.8 |
| 19 | 19EP | 220.30 | 66.00 | 286.30 | ±2 | (S)1.6 | (S)3.5 |
| 20 | 19NA | 221.00 | 27.00 | 248.00 | ±1 | (S)3.4 | (S)1.7 |
| 21 | 19YD | 224.00 | 1806.00 | 2030.00 | ±1 | (S)1.7 | (S)3.4 |
| 22 | 19BR | 225.00 | 205.00 | 430.00 | ±1 | R | R |
| 23 | 19US | 225.00 | 225.00 | 450.00 | ±1 | R | R |
| 24 | 19FP | 230.00 | 190.00 | 420.00 | ±1 | R | R |
| 25 | 19DA | 232.00 | 270.00 | 502.00 | | R | R |
| 26 | 19ABK | 233.00 | 233.00 | 466.00 | ±1 | R | R |
| 27 | 19MU | 236.20 | 1094.00 | 1330.20 | ±1 | (S)2.7 | (S)2.4 |
| 28 | 19SW | 237.00 | 430.00 | 667.00 | ±1 | R | R |
| 29 | 19GD | 240.00 | 250.00 | 490.00 | ±1 | R | R |
| 30 | 19AH | 240.00 | 240.00 | 480.00 | | R | R |
| 31 | 19JG | 240.00 | 720.00 | 960.00 | ±1 | (S)3.8 | (S)1.3 |
| 32 | 19LE | 240.00 | 240.00 | 480.00 | ±1 | R | R |
| 33 | 19LH | 245.00 | 245.00 | 490.00 | ±.5 | R | R |
| 34 | 19AAL | 246.00 | 1670.00 | 1916.00 | ±1 | (S)2.0 | (S)3.1 |
| 35 | 19CJ | 250.00 | 750.00 | 1000.00 | ±1 | (S)3.7 | (S)1.4 |
| 36 | 19GD | 250.00 | 240.00 | 490.00 | ±1 | R | R |
| 37 | 19HD | 250.00 | 250.00 | 500.00 | ±1 | R | R |
| 38 | 19JC | 250.00 | 350.00 | 600.00 | | R | R |
| 39 | 19PK | 250.00 | 125.00 | 375.00 | ±1 | R | R |
| 40 | 19SL | 250.00 | 150.00 | 400.00 | ±1 | R | R |
| 41 | 19JW | 252.00 | 64.00 | 316.00 | ±1 | (S)2.0 | (S)3.1 |
| 42 | 19AN | 260.00 | 260.00 | 520.00 | | R | R |
| 43 | 19AR | 260.00 | 60.00 | 320.00 | | (S)2.2 | (S)2.9 |
| 44 | 19FN | 260.00 | 290.00 | 550.00 | ±1 | R | R |
| 45 | 19WL | 260.00 | 260.00 | 520.00 | ±1 | R | R |

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|------------------------------|--------------|---------------|
| | | Wdg. | Wdg. | | Wdg. | Wdg. |
| 1 | 19NE | 265.00 | 180.00 | 445.00 | R | R |
| 2 | 19JY | 268.00 | 488.00 | 756.00 | ±1 | R |
| 3 | 19SG | 268.10 | 268.10 | 536.20 | ±.5 | R |
| 4 | 19KL | 269.00 | 1490.00 | 1759.00 | ±2 | (S)2.3 (S)2.8 |
| 5 | 19YB | 269.00 | 1569.00 | 1838.00 | ±1 | (S)2.2 (S)2.9 |
| 6 | 19BP | 270.00 | 375.00 | 645.00 | ±1 | R |
| 7 | 19CG | 270.00 | 270.00 | 540.00 | | R |
| 8 | 19DA | 270.00 | 232.00 | 502.00 | | R |
| 9 | 19LM | 275.00 | 275.00 | 550.00 | ±1 | R |
| 10 | 19DH | 280.00 | 1330.00 | 1610.00 | ±1 | (S)2.7 (S)2.4 |
| 11 | 19HU | 280.00 | 20.00 | 300.00 | ±1 | (S)4.1 (S)1.0 |
| 12 | 19NN | 280.00 | 135.00 | 415.00 | | R |
| 13 | 19ABE | 280.00 | 120.00 | 400.00 | ±1 | (S)0.5 (S)4.6 |
| 14 | 19CF | 284.00 | 284.00 | 568.00 | | R |
| 15 | 19UN | 284.00 | 284.00 | 568.00 | ±1 | R |
| 16 | 19PE | 285.70 | 1260.00 | 1545.70 | ±.5 | (S)2.8 (S)2.3 |
| 17 | 19KH | 286.00 | 1325.00 | 1611.00 | ±2 | (S)2.7 (S)2.4 |
| 18 | 19SH | 289.50 | 289.50 | 579.00 | ±.5 | R |
| 19 | 19FN | 290.00 | 260.00 | 550.00 | ±1 | R |
| 20 | 19FT | 290.00 | 300.00 | 590.00 | ±1 | R |
| 21 | 19PG | 290.00 | 290.00 | 580.00 | ±1 | R |
| 22 | 19AAM | 291.00 | 1470.00 | 1761.00 | ±1 | (S)2.5 (S)2.6 |
| 23 | 19SJ | 296.60 | 296.60 | 593.20 | ±.5 | R |
| 24 | 19BB | 300.00 | 2300.00 | 2600.00 | | R |
| 25 | 19BC | 300.00 | 50.00 | 350.00 | | (S)2.9 (S)2.2 |
| 26 | 19DT | 300.00 | 150.00 | 450.00 | | R |
| 27 | 19FT | 300.00 | 290.00 | 590.00 | ±1 | R |
| 28 | 19GJ | 300.00 | 500.00 | 800.00 | | R |
| 29 | 19GK | 300.00 | 2500.00 | 2800.00 | | R |
| 30 | 19GL | 300.00 | 300.00 | 600.00 | | R |
| 31 | 19GN | 300.00 | 600.00 | 900.00 | | R |
| 32 | 19HE | 300.00 | 1900.00 | 2200.00 | | (S)2.1 (S)3.0 |
| 33 | 19HK | 300.00 | 300.00 | 600.00 | ±.5 | R |
| 34 | 19JD | 300.00 | 400.00 | 700.00 | | R |
| 35 | 19JL | 300.00 | 2460.00 | 2760.00 | ±1 | (S)1.6 (S)3.5 |
| 36 | 19JU | 300.00 | 48.00 | 348.00 | ±1 | (S)3.0 (S)2.1 |
| 37 | 19LA | 300.00 | 300.00 | 600.00 | ±1 | R |
| 38 | 19WT | 300.00 | 200.00 | 500.00 | ±1 | R |
| 39 | 19DW | 307.00 | 307.00 | 614.00 | ±1 | R |
| 40 | 19PU | 312.00 | 1155.00 | 1467.00 | ±1 | (S)3.3 (S)1.8 |
| 41 | 19YA | 317.00 | 1394.00 | 1711.00 | ±1 | (S)2.8 (S)2.3 |
| 42 | 19NK | 320.00 | 210.00 | 530.00 | | R |
| 43 | 19GP | 325.00 | 475.00 | 800.00 | ±1 | R |
| 44 | 19AAE | 326.00 | 210.00 | 536.00 | ±1 | R |
| 45 | 19EB | 330.00 | 20.00 | 350.00 | | (S)4.2 (S)0.9 |

March 1966

II-15

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19FM | 330.00 | 350.00 | 680.00 | ±1 | R | R |
| 2 | 19TW | 330.00 | 330.00 | 660.00 | ±1 | R | R |
| 3 | 19UJ | 336.00 | 336.00 | 672.00 | ±1 | R | R |
| 4 | 19MR | 340.00 | 395.00 | 735.00 | ±1 | R | R |
| 5 | 19CB | 345.00 | 125.00 | 470.00 | ±1 | (S)1.0 | (S)4.1 |
| 6 | 19BJ | 350.00 | 350.00 | 700.00 | | R | R |
| 7 | 19DS | 350.00 | 350.00 | 700.00 | ±1 | R | R |
| 8 | 19FM | 350.00 | 330.00 | 680.00 | ±1 | R | R |
| 9 | 19JC | 350.00 | 250.00 | 600.00 | | R | R |
| 10 | 19TM | 350.00 | 1000.00 | 1350.00 | ±1 | (S)4.0 | (S)1.1 |
| 11 | 19UY | 350.00 | 100.00 | 450.00 | ±1 | (S)1.7 | (S)3.4 |
| 12 | 19PF | 359.10 | 1003.00 | 1362.10 | ±.5 | (S)4.0 | (S)1.1 |
| 13 | 19FR | 360.00 | 370.00 | 730.00 | ±1 | R | R |
| 14 | 19SU | 360.00 | 180.00 | 540.00 | ±1 | R | R |
| 15 | 19MB | 362.00 | 362.00 | 724.00 | ±1 | R | R |
| 16 | 19FL | 370.00 | 460.00 | 830.00 | ±1 | R | R |
| 17 | 19FR | 370.00 | 360.00 | 730.00 | ±1 | R | R |
| 18 | 19ME | 370.00 | 1300.00 | 1670.00 | ±1 | (S)3.4 | (S)1.7 |
| 19 | 19AAN | 370.00 | 1260.00 | 1630.00 | ±1 | (S)3.5 | (S)1.6 |
| 20 | 19CY | 373.00 | 530.00 | 903.00 | ±1 | R | R |
| 21 | 19BP | 375.00 | 270.00 | 645.00 | ±1 | R | R |
| 22 | 19BD | 380.00 | 100.00 | 480.00 | | (S)1.9 | (S)3.2 |
| 23 | 19BW | 380.00 | 750.00 | 1130.00 | | R | R |
| 24 | 19CC | 380.00 | 900.00 | 1280.00 | ±1 | (S)4.6 | (S)0.5 |
| 25 | 19CR | 380.00 | 450.00 | 830.00 | | R | R |
| 26 | 19EU | 380.00 | 580.00 | 960.00 | ±1 | R | R |
| 27 | 19MW | 385.00 | 423.00 | 808.00 | ±1 | R | R |
| 28 | 19TA | 387.50 | 387.50 | 775.00 | ±1 | R | R |
| 29 | 19NP | 390.00 | 100.00 | 490.00 | (b) | (S)2.0 | (S)3.1 |
| 30 | 19MR | 395.00 | 340.00 | 735.00 | ±1 | R | R |
| 31 | 19BG | 400.00 | 200.00 | 600.00 | | R | R |
| 32 | 19BS | 400.00 | 20.00 | 420.00 | ±1 | (S)4.4 | (S)0.7 |
| 33 | 19CT | 400.00 | 34.00 | 434.00 | | (S)3.9 | (S)1.2 |
| 34 | 19GA | 400.00 | 600.00 | 1000.00 | ±1 | R | R |
| 35 | 19GM | 400.00 | 1000.00 | 1400.00 | | (S)4.4 | (S)0.7 |
| 36 | 19JD | 400.00 | 300.00 | 700.00 | | R | R |
| 37 | 19JR | 400.00 | 60.00 | 460.00 | | (S)3.1 | (S)2.0 |
| 38 | 19NT | 400.00 | 800.00 | 1200.00 | ±1 | R | R |
| 39 | 19SY | 400.00 | 210.00 | 610.00 | ±1 | R | R |
| 40 | 19TN | 400.00 | 50.00 | 450.00 | ±1 | (S)3.4 | (S)1.7 |
| 41 | 19ABR | 400.00 | 400.00 | 800.00 | ±1 | R | R |
| 42 | 19FW | 410.00 | 420.00 | 830.00 | ±1 | R | R |
| 43 | 19FW | 420.00 | 410.00 | 830.00 | ±1 | R | R |
| 44 | 19HT | 420.00 | 140.00 | 560.00 | ±1 | (S)1.3 | (S)3.8 |
| 45 | 19MW | 423.00 | 385.00 | 808.00 | ±1 | R | R |

(b) ±5 for 100.0, ±1 for 390.0.

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE-OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-----------------|---------|---------|---------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19GH | 425.00 | 425.00 | 850.00 | ±1 | R | R |
| 2 | 19YM | 427.00 | 1155.00 | 1582.00 | ±1 | (S)4.1 | (S)1.0 |
| 3 | 19SW | 430.00 | 237.00 | 667.00 | ±1 | R | R |
| 4 | 19LP | 445.00 | 878.00 | 1323.00 | | R | R |
| 5 | 19CR | 450.00 | 380.00 | 830.00 | | R | R |
| 6 | 19MC | 450.00 | 450.00 | 900.00 | ±1 | R | R |
| 7 | 19DC | 456.00 | 530.00 | 986.00 | ±1 | R | R |
| 8 | 19FL | 460.00 | 370.00 | 830.00 | ±1 | R | R |
| 9 | 19LN | 465.00 | 465.00 | 930.00 | ±1 | R | R |
| 10 | 19KJ | 467.00 | 512.00 | 979.00 | ±2 | R | R |
| 11 | 19GP | 475.00 | 325.00 | 800.00 | ±1 | R | R |
| 12 | 19JY | 488.00 | 268.00 | 756.00 | ±1 | R | R |
| 13 | 19RD | 491.00 | 491.00 | 982.00 | ±1 | R | R |
| 14 | 19AAP | 493.00 | 1070.00 | 1563.00 | ±1 | (S)4.8 | (S)0.3 |
| 15 | 19BH | 500.00 | 100.00 | 600.00 | | (S)2.6 | (S)2.5 |
| 16 | 19BK | 500.00 | 40.00 | 540.00 | | (S)4.0 | (S)1.1 |
| 17 | 19DY | 500.00 | 500.00 | 1000.00 | | R | R |
| 18 | 19GE | 500.00 | 1500.00 | 2000.00 | | (S)3.8 | (S)1.3 |
| 19 | 19GJ | 500.00 | 300.00 | 800.00 | | R | R |
| 20 | 19KP | 500.00 | 3500.00 | 4000.00 | | (S)1.9 | (S)3.2 |
| 21 | 19NF | 500.00 | 55.00 | 555.00 | | (S)3.6 | (S)1.5 |
| 22 | 19NW | 500.00 | 500.00 | 1000.00 | ±1 | R | R |
| 23 | 19PJ | 500.00 | 1000.00 | 1500.00 | ±.5 | R | R |
| 24 | 19PM | 500.00 | 145.00 | 645.00 | ±.5 | (S)1.7 | (S)3.4 |
| 25 | 19TF | 500.00 | 700.00 | 1200.00 | ±1 | R | R |
| 26 | 19CE | 510.00 | 125.00 | 635.00 | ±1 | (S)2.1 | (S)3.0 |
| 27 | 19RT | 510.00 | 5700.00 | 6210.00 | ±1 | (S)1.3 | (S)3.8 |
| 28 | 19KJ | 512.00 | 467.00 | 979.00 | ±2 | R | R |
| 29 | 19SP | 525.00 | 5700.00 | 6225.00 | ±1 | (S)1.3 | (S)3.8 |
| 30 | 19CY | 530.00 | 373.00 | 903.00 | ±1 | R | R |
| 31 | 19DC | 530.00 | 456.00 | 986.00 | ±1 | R | R |
| 32 | 19MY | 539.00 | 120.50 | 659.50 | ±1 | (S)2.3 | (S)2.8 |
| 33 | 19HN | 540.00 | 110.00 | 650.00 | ±1 | (S)2.5 | (S)2.6 |
| 34 | 19HL | 545.00 | 545.00 | 1090.00 | | R | R |
| 35 | 19LY | 550.00 | 50.00 | 600.00 | ±1 | (S)3.8 | (S)1.3 |
| 36 | 19YK | 560.00 | 1002.00 | 1562.00 | ±1 | R | R |
| 37 | 19WP | 570.00 | 1200.00 | 1770.00 | | (S)4.9 | (S)0.2 |
| 38 | 19EU | 580.00 | 380.00 | 960.00 | ±1 | R | R |
| 39 | 19GR | 586.00 | 98.00 | 684.00 | | (S)2.9 | (S)2.2 |
| 40 | 19BF | 600.00 | 1600.00 | 2200.00 | | (S)4.2 | (S)0.9 |
| 41 | 19EG | 600.00 | 1800.00 | 2400.00 | | (S)3.8 | (S)1.3 |
| 42 | 19EY | 600.00 | 600.00 | 1200.00 | | R | R |
| 43 | 19GA | 600.00 | 400.00 | 1000.00 | ±1 | R | R |
| 44 | 19GN | 600.00 | 300.00 | 900.00 | | R | R |
| 45 | 19JN | 600.00 | 1200.00 | 1800.00 | | R | R |

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | I9MD | 600.00 | 80.00 | 680.00 | | (S)3.3 | (S)1.8 |
| 2 | I9PY | 600.00 | 200.00 | 800.00 | | (S)1.3 | (S)3.8 |
| 3 | I9RC | 600.00 | 400.00 | 5000.00 | ±1 | (S)1.8 | (S)3.3 |
| 4 | I9RJ | 600.00 | 100.00 | 700.00 | ±1 | (S)2.9 | (S)2.2 |
| 5 | I9SR | 600.00 | 800.00 | 1400.00 | ±1 | R | R |
| 6 | I9TR | 600.00 | 900.00 | 1500.00 | ±1 | R | R |
| 7 | I9UB | 600.00 | 6000.00 | 6600.00 | ±1 | (S)1.5 | (S)3.6 |
| 8 | I9ABP | 600.00 | 1000.00 | 1600.00 | | R | R |
| 9 | I9NG | 606.00 | 606.00 | 1012.00 | ±.5 | R | R |
| 10 | I9MA | 615.00 | 112.00 | 727.00 | | (S)2.7 | (S)2.4 |
| 11 | I9HY | 630.00 | 20.00 | 650.00 | ±1 | (S)4.2 | (S)0.9 |
| 12 | I9ABG | 634.00 | 634.00 | 1268.00 | ±1 | R | R |
| 13 | I9YE | 636.00 | 946.00 | 1582.00 | ±1 | R | R |
| 14 | I9BT | 640.00 | 10.00 | 650.00 | ±1 | (S)4.9 | (S)0.2 |
| 15 | I9EC | 650.00 | 1600.00 | 2250.00 | | (S)4.4 | (S)0.7 |
| 16 | I9SM | 650.00 | 200.00 | 850.00 | ±1 | (S)1.5 | (S)3.6 |
| 17 | I9KN | 651.00 | 146.00 | 797.00 | ±2 | (S)2.8 | (S)2.3 |
| 18 | I9RA | 660.00 | 125.00 | 785.00 | ±1 | (S)2.7 | (S)2.4 |
| 19 | I9SE | 660.00 | 1100.00 | 1760.00 | ±1 | R | R |
| 20 | I9YL | 663.00 | 2985.00 | 3648.00 | ±1 | (S)2.7 | (S)2.4 |
| 21 | I9ABC | 673.00 | 2670.00 | 3343.00 | ±1 | (S)3.1 | (S)2.0 |
| 22 | I9HF | 675.00 | 925.00 | 1600.00 | ±1 | R | R |
| 23 | I9AAK | 680.00 | 1900.00 | 2580.00 | ±1 | (S)4.0 | (S)1.1 |
| 24 | I9ABB | 681.00 | 2370.00 | 3051.00 | ±1 | (S)3.4 | (S)1.7 |
| 25 | I9KA | 685.00 | 70.00 | 755.00 | ±1 | (S)3.7 | (S)1.4 |
| 26 | I9WR | 691.00 | 2108.00 | 2799.00 | ±1 | (S)3.8 | (S)1.3 |
| 27 | I9RL | 700.00 | 700.00 | 1400.00 | | R | R |
| 28 | I9TF | 700.00 | 500.00 | 1200.00 | ±1 | R | R |
| 29 | I9TU | 700.00 | 1700.00 | 2400.00 | ±1 | (S)4.5 | (S)0.6 |
| 30 | I9ABA | 706.00 | 1870.00 | 2576.00 | ±1 | (S)4.2 | (S)0.9 |
| 31 | I9YJ | 714.00 | 1718.00 | 2432.00 | ±1 | (S)4.5 | (S)0.6 |
| 32 | I9AAY | 715.00 | 1670.00 | 2385.00 | ±1 | (S)4.6 | (S)0.5 |
| 33 | I9JG | 720.00 | 240.00 | 960.00 | ±1 | (S)1.3 | (S)3.8 |
| 34 | I9AAR | 723.00 | 898.00 | 1621.0 | ±1 | R | R |
| 35 | I9YH | 733.00 | 1485.00 | 2218.00 | ±1 | R | R |
| 36 | I9BW | 750.00 | 380.00 | 1130.00 | | R | R |
| 37 | I9CJ | 750.00 | 250.00 | 1000.00 | ±1 | (S)1.4 | (S)3.7 |
| 38 | I9CP | 750.00 | 1000.00 | 1750.00 | | R | R |
| 39 | I9UE | 750.00 | 750.00 | 1500.00 | ±1 | R | R |
| 40 | I9AAW | 750.00 | 1320.00 | 2070.00 | ±1 | R | R |
| 41 | I9AAD | 760.00 | 2700.00 | 3460.00 | ±1 | (S)3.3 | (S)1.8 |
| 42 | I9YG | 767.00 | 1208.00 | 1975.00 | ±1 | R | R |
| 43 | I9CA | 770.00 | 185.00 | 955.00 | ±1 | (S)2.1 | (S)3.0 |
| 44 | I9DG | 770.00 | 133.00 | 903.00 | ±1 | (S)2.9 | (S)2.2 |
| 45 | I9AAU | 777.00 | 1170.00 | 1947.00 | ±1 | R | R |

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19RG | 797.00 | 1041.00 | 1838.00 | ±1 | R | R |
| 2 | 19EW | 800.00 | 800.00 | 1600.00 | | R | R |
| 3 | 19JP | 800.00 | 1600.00 | 2400.00 | | R | R |
| 4 | 19NT | 800.00 | 400.00 | 1200.00 | ±1 | R | R |
| 5 | 19SR | 800.00 | 600.00 | 1400.00 | ±1 | R | R |
| 6 | 19UU | 800.00 | 800.00 | 1600.00 | ±1 | R | R |
| 7 | 19AAS | 816.00 | 856.00 | 1672.00 | ±1 | R | R |
| 8 | 19AAT | 825.00 | 920.00 | 1745.00 | ±1 | R | R |
| 9 | 19WG | 833.00 | 6580.00 | 7413.00 | ±3 | (S)1.7 | (S)3.4 |
| 10 | 19RY | 840.00 | 140.00 | 980.00 | | (S)2.8 | (S)2.3 |
| 11 | 19YF | 842.00 | 851.00 | 1693.00 | ±1 | R | R |
| 12 | 19UL | 845.00 | 85.00 | 930.00 | ±1 | (S)3.7 | (S)1.4 |
| 13 | 19JH | 850.00 | 160.00 | 1010.00 | ±1 | (S)2.7 | (S)2.4 |
| 14 | 19YF | 851.00 | 842.00 | 1693.00 | ±1 | R | R |
| 15 | 19AAS | 856.00 | 816.00 | 1672.00 | ±1 | R | R |
| 16 | 19RE | 877.00 | 1297.00 | 2174.00 | ±1 | R | R |
| 17 | 19LP | 878.00 | 445.00 | 1323.00 | | R | R |
| 18 | 19MP | 890.00 | 209.00 | 1099.00 | ±1 | (S)2.2 | (S)2.9 |
| 19 | 19CL | 895.00 | 125.00 | 1020.00 | ±1 | (S)3.2 | (S)1.9 |
| 20 | 19AAR | 898.00 | 723.00 | 1621.00 | ±1 | R | R |
| 21 | 19BA | 900.00 | 900.00 | 1800.00 | | R | R |
| 22 | 19CC | 900.00 | 380.00 | 1280.00 | ±1 | (S)0.5 | (S)4.6 |
| 23 | 19HM | 900.00 | 110.00 | 1010.00 | ±1 | (S)3.4 | (S)1.7 |
| 24 | 19TR | 900.00 | 600.00 | 1500.00 | ±1 | R | R |
| 25 | 19UD | 900.00 | 100.00 | 1000.00 | ±1 | (S)3.7 | (S)1.4 |
| 26 | 19DJ | 903.00 | 117.00 | 1020.00 | ±1 | (S)3.4 | (S)1.7 |
| 27 | 19MN | 920.00 | 191.00 | 1111.00 | ±1 | (S)2.5 | (S)2.6 |
| 28 | 19AAT | 920.00 | 825.00 | 1745.00 | ±1 | R | R |
| 29 | 19HF | 925.00 | 675.00 | 1600.00 | ±1 | R | R |
| 30 | 19TB | 940.00 | 7560.00 | 8500.00 | (d) | (S)1.7 | (S)3.4 |
| 31 | 19YE | 946.00 | 636.00 | 1582.00 | ±1 | R | R |
| 32 | 19EH | 950.00 | 38.00 | 988.00 | ±1 | (S)4.5 | (S)0.6 |
| 33 | 19ET | 950.00 | 33.00 | 983.00 | ±1 | (S)4.5 | (S)0.6 |
| 34 | 19TS | 970.00 | 970.00 | 1940.00 | ±1 | R | R |
| 35 | 19ABS | 975.00 | 2400.00 | 3375.00 | ±1 | R | R |
| 36 | 19DE | 986.00 | 34.00 | 1020.00 | ±1 | (S)4.6 | (S)0.5 |
| 37 | 19BM | 1000.00 | 1000.00 | 2000.00 | | R | R |
| 38 | 19CP | 1000.00 | 750.00 | 1750.00 | | R | R |
| 39 | 19DU | 1000.00 | 100.00 | 1100.00 | | (S)3.7 | (S)1.4 |
| 40 | 19GM | 1000.00 | 400.00 | 1400.00 | | (S)0.7 | (S)4.4 |
| 41 | 19HG | 1000.00 | 1600.00 | 2600.00 | | R | R |
| 42 | 19HH | 1000.00 | 112.00 | 1112.00 | | (S)3.4 | (S)1.7 |
| 43 | 19JS | 1000.00 | 2500.00 | 3500.00 | | (S)4.4 | (S)0.7 |
| 44 | 19PJ | 1000.00 | 500.00 | 1500.00 | ±.5 | R | R |
| 45 | 19RN | 1000.00 | 1000.00 | 2000.00 | ±1 | R | R |

(d) ±1% for 940.0, ±5% for 7560.0.

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | 19RR | 1000.00 | 80.00 | 1080.00 | ±1 | (S)1.1 | (S)4.0 |
| 2 | 19RS | 1000.00 | 42.00 | 1042.00 | ±1 | (S)4.5 | (S)0.6 |
| 3 | 19TM | 1000.00 | 350.00 | 1350.00 | ±1 | (S)1.1 | (S)4.0 |
| 4 | 19ABP | 1000.00 | 600.00 | 1600.00 | | R | R |
| 5 | 19YK | 1002.00 | 560.00 | 1562.00 | ±1 | R | R |
| 6 | 19PF | 1003.00 | 359.10 | 1362.10 | ±.5 | (S)1.1 | (S)4.0 |
| 7 | 19RG | 1041.00 | 797.00 | 1838.00 | ±1 | R | R |
| 8 | 19CU | 1050.00 | 120.00 | 1170.00 | ±1 | (S)3.6 | (S)1.5 |
| 9 | 19AAP | 1070.00 | 493.00 | 1563.00 | ±1 | (S)0.3 | (S)4.8 |
| 10 | 19BY | 1075.00 | 220.00 | 1295.00 | ±1 | (S)2.5 | (S)2.6 |
| 11 | 19MU | 1094.00 | 236.20 | 1330.20 | ±1 | (S)2.4 | (S)2.7 |
| 12 | 19CD | 1095.00 | 125.00 | 1220.00 | ±1 | (S)3.5 | (S)1.6 |
| 13 | 19SE | 1100.00 | 660.00 | 1760.00 | ±1 | R | R |
| 14 | 19SN | 1100.00 | 2400.00 | 3500.00 | ±1 | (S)4.8 | (S)0.3 |
| 15 | 19TL | 1150.00 | 1150.00 | 2300.00 | ±1 | R | R |
| 16 | 19PU | 1155.00 | 312.00 | 1467.00 | ±1 | (S)3.3 | (S)1.8 |
| 17 | 19YM | 1155.00 | 427.00 | 1582.00 | ±1 | (S)1.0 | (S)4.1 |
| 18 | 19AAU | 1170.00 | 777.00 | 1947.00 | ±1 | R | R |
| 19 | 19JN | 1200.00 | 600.00 | 1800.00 | | R | R |
| 20 | 19PS | 1200.00 | 1600.00 | 2800.00 | ±1 | R | R |
| 21 | 19SA | 1200.00 | 5300.00 | 6500.00 | | (S)2.8 | (S)2.3 |
| 22 | 19TE | 1200.00 | 1900.00 | 3100.00 | ±1 | R | R |
| 23 | 19WP | 1200.00 | 570.00 | 1770.00 | | (S)0.2 | (S)4.9 |
| 24 | 19YG | 1208.00 | 767.00 | 1975.00 | ±1 | R | R |
| 25 | 19CM | 1235.00 | 60.00 | 1295.00 | ±1 | (S)4.4 | (S)0.7 |
| 26 | 19PE | 1260.00 | 285.70 | 1545.70 | ±.5 | (S)2.3 | (S)2.8 |
| 27 | 19AAN | 1260.00 | 370.00 | 1630.00 | ±1 | (S)1.6 | (S)3.5 |
| 28 | 19RE | 1297.00 | 877.00 | 2174.00 | ±1 | R | R |
| 29 | 19ME | 1300.00 | 370.00 | 1670.00 | ±1 | (S)1.7 | (S)3.4 |
| 30 | 19RB | 1300.00 | 100.00 | 1400.00 | ±1 | (S)4.0 | (S)1.1 |
| 31 | 19AAW | 1320.00 | 750.00 | 2070.00 | ±1 | R | R |
| 32 | 19KH | 1325.00 | 286.00 | 1611.00 | ±2 | (S)2.4 | (S)2.7 |
| 33 | 19DH | 1330.00 | 280.00 | 1610.00 | ±1 | (S)2.4 | (S)2.7 |
| 34 | 19RM | 1350.00 | 1350.00 | 2700.00 | ±1 | R | R |
| 35 | 19YA | 1394.00 | 317.00 | 1711.00 | ±1 | (S)2.8 | (S)2.3 |
| 36 | 19AAM | 1470.00 | 291.00 | 1761.00 | ±1 | (S)2.6 | (S)2.5 |
| 37 | 19YH | 1485.00 | 733.00 | 2218.00 | ±1 | R | R |
| 38 | 19KL | 1490.00 | 269.00 | 1759.00 | ±2 | (S)2.8 | (S)2.3 |
| 39 | 19DD | 1500.00 | 159.00 | 1659.00 | ±1 | R | R |
| 40 | 19GE | 1500.00 | 500.00 | 2000.00 | | (S)1.3 | (S)3.8 |
| 41 | 19KY | 1500.00 | 1500.00 | 3000.00 | | R | R |
| 42 | 19YB | 1569.00 | 269.00 | 1838.00 | ±1 | (S)2.9 | (S)2.2 |
| 43 | 19BF | 1600.00 | 600.00 | 2200.00 | | (S)0.9 | (S)4.2 |
| 44 | 19EC | 1600.00 | 650.00 | 2250.00 | | (S)0.7 | (S)4.4 |
| 45 | 19HG | 1600.00 | 1000.00 | 2600.00 | | R | R |

Phenolic Insulation - 19-Type RESISTOR

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | Total | | Wdg. | Wdg. |
| 1 | I9JE | 1600.00 | 1600.00 | 3200.00 | | R | R |
| 2 | I9JP | 1600.00 | 800.00 | 2400.00 | | R | R |
| 3 | I9PS | 1600.00 | 1200.00 | 2800.00 | ±1 | R | R |
| 4 | I9SD | 1670.00 | 2460.00 | 4130.00 | ±1 | R | R |
| 5 | I9AAL | 1670.00 | 246.00 | 1916.00 | ±1 | (S)3.1 | (S)2.0 |
| 6 | I9AAY | 1670.00 | 715.00 | 2385.00 | ±1 | (S)0.5 | (S)4.6 |
| 7 | I9ML | 1685.00 | 105.00 | 1790.00 | ±1 | (S)4.2 | (S)0.9 |
| 8 | I9TC | 1700.00 | 3450.00 | 5150.00 | (c) | R | R |
| 9 | I9TU | 1700.00 | 700.00 | 2400.00 | ±1 | (S)4.5 | (S)0.6 |
| 10 | I9TJ | 1705.00 | 5200.00 | 6905.00 | ±1 | (S)3.8 | (S)1.3 |
| 11 | I9YJ | 1718.00 | 714.00 | 2432.00 | ±1 | (S)0.6 | (S)4.5 |
| 12 | I9MM | 1740.00 | 97.00 | 1837.00 | ±1 | (S)4.3 | (S)0.8 |
| 13 | I9ST | 1754.00 | 52.80 | 1806.80 | ±1 | (S)4.7 | (S)0.4 |
| 14 | I9WD | 1760.00 | 2000.00 | 3760.00 | ±1 | R | R |
| 15 | I9WH | 1760.00 | 3075.00 | 4835.00 | ±3 | R | R |
| 16 | I9EG | 1800.00 | 600.00 | 2400.00 | | (S)1.3 | (S)3.8 |
| 17 | I9KT | 1800.00 | 85.00 | 1885.00 | | (S)4.4 | (S)0.7 |
| 18 | I9ABH | 1800.00 | 37.00 | 1837.00 | ±1 | (S)4.8 | (S)0.3 |
| 19 | I9PD | 1806.00 | 199.40 | 2005.40 | ±.5 | (S)3.6 | (S)1.5 |
| 20 | I9YD | 1806.00 | 224.00 | 2030.00 | ±1 | (S)3.4 | (S)1.7 |
| 21 | I9ABA | 1870.00 | 706.00 | 2576.00 | ±1 | (S)0.9 | (S)4.2 |
| 22 | I9HE | 1900.00 | 300.00 | 2200.00 | | (S)3.0 | (S)2.1 |
| 23 | I9TE | 1900.00 | 1200.00 | 3100.00 | ±1 | R | R |
| 24 | I9AAK | 1900.00 | 680.00 | 2580.00 | ±1 | (S)1.1 | (S)4.0 |
| 25 | I9ABL | 1910.00 | 6810.00 | 8720.00 | ±1 | (S)2.0 | (S)3.1 |
| 26 | I9AAC | 1958.00 | 203.00 | 2161.00 | ±1 | (S)3.7 | (S)1.4 |
| 27 | I9AY | 2000.00 | 50.00 | 2050.00 | | (S)4.7 | (S)0.4 |
| 28 | I9KR | 2000.00 | 4000.00 | 6000.00 | | R | R |
| 29 | I9WD | 2000.00 | 1760.00 | 3760.00 | ±1 | R | R |
| 30 | I9YN | 2000.00 | 2000.00 | 4000.00 | ±1 | R | R |
| 31 | I9WR | 2108.00 | 691.00 | 2799.00 | ±1 | (S)1.3 | (S)3.8 |
| 32 | I9RF | 2140.00 | 168.00 | 2308.00 | ±.5 | (S)4.0 | (S)1.1 |
| 33 | I9YW | 2142.00 | 182.00 | 2324.00 | ±1 | (S)3.9 | (S)1.2 |
| 34 | I9ABD | 2210.00 | 2610.00 | 4820.00 | ±1 | R | R |
| 35 | I9BB | 2300.00 | 300.00 | 2600.00 | | R | R |
| 36 | I9WB | 2345.00 | 7.80 | 2352.80 | ±1 | (S)5.0 | (S)0.1 |
| 37 | I9AAB | 2368.00 | 162.50 | 2530.50 | ±1 | (S)4.1 | (S)1.0 |
| 38 | I9ABB | 2370.00 | 681.00 | 3051.00 | ±1 | (S)1.7 | (S)3.4 |
| 39 | I9JM | 2400.00 | 4800.00 | 7200.00 | | R | R |
| 40 | I9SN | 2400.00 | 1100.00 | 3500.00 | ±1 | (S)0.3 | (S)4.8 |
| 41 | I9ABJ | 2400.00 | 2400.00 | 4800.00 | | R | R |
| 42 | I9ABS | 2400.00 | 975.00 | 3375.00 | ±1 | R | R |
| 43 | I9JL | 2460.00 | 300.00 | 2760.00 | ±1 | (S)3.5 | (S)1.6 |
| 44 | I9SD | 2460.00 | 1670.00 | 4130.00 | ±1 | R | R |
| 45 | I9MT | 2472.00 | 131.60 | 2603.60 | ±1 | (S)4.3 | (S)0.8 |

(c) ±1% for 1700.00, ±5% for 3450.00.

19-Type RESISTOR - Phenolic Insulation

| Line No. | CODE NO. | RESISTANCE - OHMS | | TOLERANCE ±5% or as shown | RATING-WATTS | |
|----------|----------|-------------------|---------|------------------------------|--------------|--------|
| | | Wdg. | Wdg. | | Wdg. | Wdg. |
| 1 | 19GK | 2500.00 | 300.00 | | R | R |
| 2 | 19JS | 2500.00 | 1000.00 | | (S)0.7 | (S)4.4 |
| 3 | 19SS | 2500.00 | 2500.00 | | R | R |
| 4 | 19WM | 2500.00 | 5100.00 | | R | R |
| 5 | 19UA | 2500.00 | 2500.00 | ±1 | R | R |
| 6 | 19HJ | 2600.00 | 112.00 | | (S)4.5 | (S)0.6 |
| 7 | 19ABD | 2610.00 | 2210.00 | ±1 | R | R |
| 8 | 19YU | 2652.00 | 143.00 | ±1 | (S)4.3 | (S)0.8 |
| 9 | 19ABC | 2670.00 | 673.00 | ±1 | (S)2.0 | (S)3.1 |
| 10 | 19AAD | 2700.00 | 760.00 | ±1 | (S)1.8 | (S)3.3 |
| 11 | 19YL | 2985.00 | 663.00 | ±1 | (S)2.4 | (S)2.7 |
| 12 | 19KG | 2990.00 | 160.00 | ±2 | (S)4.3 | (S)0.8 |
| 13 | 19RP | 3000.00 | 3000.00 | ±1 | R | R |
| 14 | 19AAA | 3019.00 | 124.20 | ±1 | (S)4.6 | (S)0.5 |
| 15 | 19WH | 3075.00 | 1760.00 | ±3 | R | R |
| 16 | 19UG | 3100.00 | 210.00 | ±1 | (S)4.1 | (S)1.0 |
| 17 | 19KK | 3160.00 | 152.00 | ±2 | (S)4.4 | (S)0.7 |
| 18 | 19MJ | 3210.00 | 43.40 | ±1 | (S)4.9 | (S)0.2 |
| 19 | 19TC | 3450.00 | 1700.00 | (c) | R | R |
| 20 | 19MK | 3480.00 | 44.00 | ±1 | (S)4.9 | (S)0.2 |
| 21 | 19KP | 3500.00 | 500.00 | | (S)3.2 | (S)1.9 |
| 22 | 19PC | 3509.00 | 102.60 | ±.5 | (S)4.7 | (S)0.4 |
| 23 | 19YC | 3509.00 | 105.70 | ±1 | (S)4.6 | (S)0.5 |
| 24 | 19UF | 3900.00 | 210.00 | ±1 | (S)4.3 | (S)0.8 |
| 25 | 19KR | 4000.00 | 2000.00 | | R | R |
| 26 | 19YY | 4204.00 | 87.60 | ±1 | (S)4.8 | (S)0.3 |
| 27 | 19RC | 4400.00 | 600.00 | ±1 | (S)3.3 | (S)1.8 |
| 28 | 19JM | 4800.00 | 2400.00 | | R | R |
| 29 | 19ABM | 5000.00 | 5000.00 | | R | R |
| 30 | 19WM | 5100.00 | 2500.00 | | R | R |
| 31 | 19TJ | 5200.00 | 1705.00 | ±1 | (S)1.3 | (S)3.8 |
| 32 | 19MS | 5245.00 | 69.60 | ±1 | (S)5.0 | (S)0.1 |
| 33 | 19SA | 5300.00 | 1200.00 | | (S)2.3 | (S)2.8 |
| 34 | 19MG | 5590.00 | 20.00 | ±1 | (S)5.0 | (S)0.1 |
| 35 | 19RT | 5700.00 | 510.00 | ±1 | (S)3.8 | (S)1.3 |
| 36 | 19SP | 5700.00 | 525.00 | ±1 | (S)1.3 | (S)3.8 |
| 37 | 19UB | 6000.00 | 600.00 | ±1 | (S)3.6 | (S)1.5 |
| 38 | 19KM | 6350.00 | 84.00 | | (S)4.9 | (S)0.2 |
| 39 | 19MH | 6400.00 | 22.40 | ±1 | (S)5.0 | (S)0.1 |
| 40 | 19NH | 6350.00 | 150.00 | | (S)4.8 | (S)0.3 |
| 41 | 19WG | 6580.00 | 833.00 | ±3 | (S)3.4 | (S)1.7 |
| 42 | 19ABL | 6810.00 | 1910.00 | ±1 | (S)3.1 | (S)2.0 |
| 43 | 19TB | 7560.00 | 940.00 | (d) | (S)3.4 | (S)1.7 |

(c) ±1% for 1700.00, ±5% for 3450.00.


(d) ±1% for 940.00, ±5% for 7560.00.

DESCRIPTION


These are power type resistors in which the wire is wound on phenolized asbestos cards, and the windings are wrapped in a phenolized asbestos cover. They are component part resistors for which no provision is made for mounting. These resistors are suitable for assembling in a container with other components of approximately the same size. If used alone, mounting straps or devices may be required, depending on the use.

Power ratings given below are for continuous operation in an ambient of 150°F. The resistors are derated to 0 watts in an ambient of 250°F. When used in a container with or without other components, the power ratings do not apply.


| CODE TYPE | TERMINALS | DIMENSIONS (Not Including Terminals) | RATING WATTS |
|-----------|---------------|---|-----------------|
| 92 | 7" lead wires | 3-5/16" x 1-13/32" x 5/32" | 2.5 |
| 120 | 7" lead wires | 1-5/8" x 1-13/32" x 5/32" | 1.0 |
| 123 | lugs | 3-7/8" x 1-3/8" x 11/64" | 2.5 |

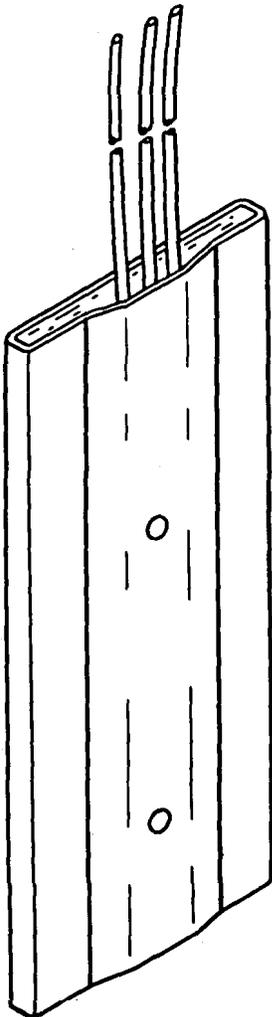

92-Type

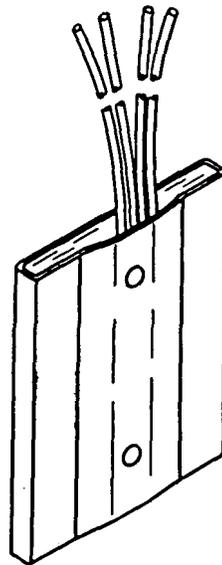

120-Type

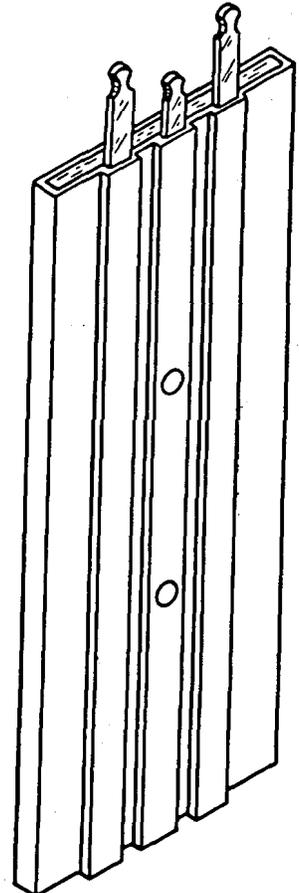

123-Type

92-, 120-, & 123-TYPE RESISTORS - SCHEMATIC FIGURES

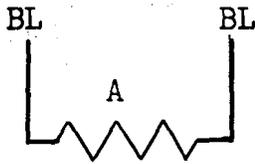


FIG. 1

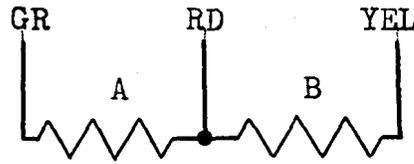


FIG. 2

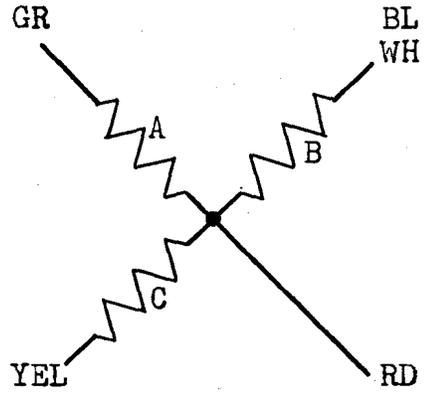


FIG. 3

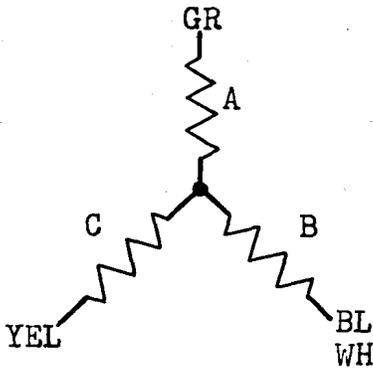


FIG. 4

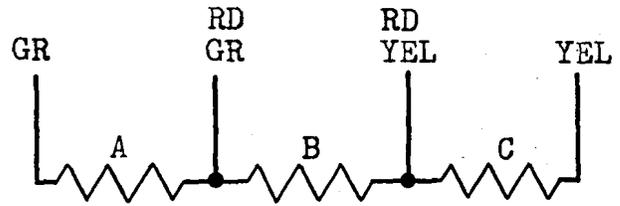


FIG. 5

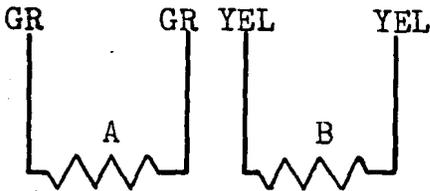


FIG. 6



FIG. 7

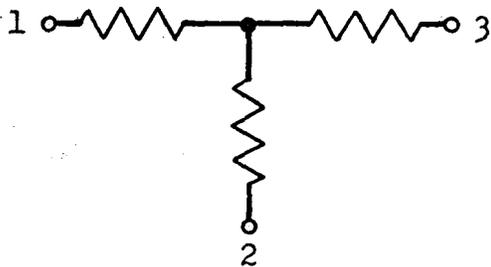


FIG. 8




FIG. 9

Phenolic Insulation - 92-TYPE RESISTOR

SINGLE WINDING RESISTORS
FIGURE 1

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % | List No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|----------|----------|-------------------------|-------------|
| 1 | 92PT | 1.12 | 1 | 41 | 92CG | 1039.00 | 1 |
| 2 | 92PM | 2.24 | 2 | 42 | 92A | 1360.00 | 0.5 |
| 3 | 92AH | 2.70 | 1 | 43 | 92T | 1380.00 | 1 |
| 4 | 92PP | 3.10 | 1 | 44 | 92F | 1545.00 | 0.5 |
| 5 | 92AG | 3.80 | 1 | 45 | 92MA | 1556.00 | 1 |
| 6 | 92PJ | 6.20 | 1 | 46 | 92NU | 1639.00 | 1 |
| 7 | 92AL | 9.50 | 1 | 47 | 92R | 1695.00 | 0.5 |
| 8 | 92AM | 12.00 | 1 | 48 | 92GR | 1750.00 | 0.5 |
| 9 | 92AU | 12.63 | 0.5 | 49 | 92S | 1910.00 | 1 |
| 10 | 92AJ | 16.70 | 0.5 | 50 | 92FM | 2512.00 | 1 |
| 11 | 92GW | 28.75 | 1 | 51 | 92CE | 2628.00 | 1 |
| 12 | 92AW | 31.41 | 0.5 | 52 | 92BW | 2644.00 | 1 |
| 13 | 92FP | 37.00 | 2 | 53 | 92BB | 2845.00 | 1 |
| 14 | 92BC | 43.50 | 0.5 | 54 | 92MM | 3300.00 | 0.5 |
| 15 | 92AY | 45.81 | 0.5 | 55 | 92BR | 3648.00 | 1 |
| 16 | 92BJ | 65.07 | 0.5 | 56 | 92MW | 3760.00 | 1 |
| 17 | 92BA | 69.72 | 0.5 | 57 | 92FW | 4000.00 | 3 |
| 18 | 92BD | 71.22 | 0.5 | 58 | 92BT | 4140.00 | 1 |
| 19 | 92N | 86.00 | 2 | 59 | 92BU | 4220.00 | 1 |
| 20 | 92BH | 87.87 | 0.5 | 60 | 92NC | 4545.00 | 0.5 |
| 21 | 92FR | 90.00 | 2 | 61 | 92AP | 5000.00 | 2 |
| 22 | 92BE | 96.00 | 0.5 | 62 | 92CD | 5270.00 | 1 |
| 23 | 92AN | 100.00 | 1 | 63 | 92BP | 5560.00 | 1 |
| 24 | 92LR | 137.70 | 0.5 | 64 | 92BS | 5850.00 | 1 |
| 25 | 92BF | 139.40 | 0.5 | 65 | 92FJ | 6125.00 | 1 |
| 26 | 92BG | 147.90 | 0.5 | 66 | 92HP | 7270.00 | 2 |
| 27 | 92HN | 189.00 | 1 | 67 | 92BM | 7620.00 | 1 |
| 28 | 92PF | 400.00 | 1 | 68 | 92LS | 8160.00 | 2 |
| 29 | 92NY | 495.00 | 1 | 69 | 92HW | 8271.00 | 0.5 |
| 30 | 92GJ | 567.00 | 0.5 | 70 | 92NA | 8700.00 | 0.5 |
| 31 | 92ND | 586.00 | 1 | 71 | 92AR | 9000.00 | 2 |
| 32 | 92PD | 586.00 | 1 | | | | |
| 33 | 92AA | 600.00 | 0.5 | | | | |
| 34 | 92GP | 605.00 | 1 | | | | |
| 35 | 92CF | 638.00 | 1 | | | | |
| 36 | 92MB | 751.00 | 1 | | | | |
| 37 | 92P | 950.00 | 1 | | | | |
| 38 | 92MC | 980.00 | 1 | | | | |
| 39 | 92H | 1195.00 | 0.5 | | | | |
| 40 | 92B | 1205.00 | 0.5 | | | | |

92-TYPE RESISTOR - Phenolic Insulation

TWO WINDING RESISTORS WITH THREE LEADS
FIGURE 2

| Line No. | CODE NO. | WINDING A | | WINDING B | |
|----------|----------|-------------------------|-------------|-------------------------|-------------|
| | | NOMINAL RESISTANCE OHMS | TOLERANCE % | NOMINAL RESISTANCE OHMS | TOLERANCE % |
| 1 | 92PS | 2.19 | 2 | 1.08 | 3 |
| 2 | 92PL | 4.38 | 1 | 2.15 | 2 |
| 3 | 92PR | 5.05 | 1 | 2.47 | 2 |
| 4 | 92PN | 6.10 | 1 | 3.00 | 1 |
| 5 | 92PU | 8.00 | 1 | 6.80 | 1 |
| 6 | 92LN | 8.06 | 1 | 8.06 | 1 |
| 7 | 92DS | 8.46 | 0.5 | 8.46 | 0.5 |
| 8 | 92PK | 10.10 | 1 | 4.94 | 1 |
| 9 | 92PH | 12.20 | 1 | 6.00 | 1 |
| 10 | 92CH | 16.67 | 0.5 | 16.67 | 0.5 |
| 11 | 92DT | 16.93 | 0.5 | 16.93 | 0.5 |
| 12 | 92CS | 17.95 | 0.5 | 17.95 | 0.5 |
| 13 | 92PW | 18.00 | 1 | 8.46 | 1 |
| 14 | 92AD | 20.00 | 1 | 10.00 | 1 |
| 15 | 92LL | 20.00 | 1 | 10.00 | 1 |
| 16 | 92C | 21.00 | 4 | 21.00 | 4 |
| 17 | 92LM | 21.88 | 1 | 21.88 | 1 |
| 18 | 92CL | 22.33 | 0.5 | 22.33 | 0.5 |
| 19 | 92CT | 23.47 | 0.5 | 23.47 | 0.5 |
| 20 | 92CY | 26.20 | 0.5 | 26.20 | 0.5 |
| 21 | 92GE | 30.00 | 2 | 15.00 | 2 |
| 22 | 92LJ | 30.00 | 1 | 15.00 | 1 |
| 23 | 92GG | 30.00 | 0.5 | 30.00 | 0.5 |
| 24 | 92CK | 31.06 | 0.5 | 31.06 | 0.5 |
| 25 | 92DE | 32.50 | 0.5 | 32.50 | 0.5 |
| 26 | 92DU | 33.70 | 0.5 | 33.70 | 0.5 |
| 27 | 92GU | 34.85 | 0.5 | 34.85 | 0.5 |
| 28 | 92CW | 35.34 | 0.5 | 35.34 | 0.5 |
| 29 | 92DF | 36.90 | 0.5 | 36.90 | 0.5 |
| 30 | 92RM | 38.75 | 1 | 33.75 | 1 |
| 31 | 92G | 40.00 | 5 | 20.00 | 5 |
| 32 | 92D | 42.00 | 3 | 42.00 | 3 |
| 33 | 92KG | 50.00 | 2 | 25.00 | 2 |
| 34 | 92GH | 50.00 | 0.5 | 30.00 | 0.5 |
| 35 | 92CJ | 50.00 | 0.5 | 50.00 | 0.5 |
| 36 | 92CU | 59.50 | 0.5 | 59.50 | 0.5 |
| 37 | 92FN | 62.50 | 1 | 62.50 | 1 |
| 38 | 92DW | 66.67 | 0.5 | 66.67 | 0.5 |
| 39 | 92JM | 79.00 | 2 | 32.00 | 2 |
| 40 | 92AE | 80.00 | 1 | 40.00 | 1 |

Phenolic Insulation - 92-TYPE RESISTOR
 TWO WINDING RESISTORS WITH THREE LEADS
 FIGURE 2

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOLERANCE % | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|--|----------------|--|----------------|
| 1 | 92E | 84.00 | 2 | 84.00 | 2 |
| 2 | 92AS | 110.00 | 1 | 20.00 | 1 |
| 3 | 92RK | 112.50 | 1 | 90.00 | 1 |
| 4 | 92MK | 135.00 | 1 | 135.00 | 1 |
| 5 | 92RE | 135.00 | 1 | 135.00 | 1 |
| 6 | 92NJ | 200.00 | 1 | 28.00 | 1 |
| 7 | 92MN | 300.00 | 0.5 | 300.00 | 0.5 |
| 8 | 92LU | 324.00 | 1 | 130.00 | 1 |
| 9 | 92GM | 342.00 | 0.5 | 342.00 | 0.5 |
| 10 | 92JB | 362.00 | 1 | 35.00 | 2 |
| 11 | 92RL | 364.50 | 1 | 291.60 | 1 |
| 12 | 92NN | 368.00 | 1 | 28.00 | 1 |
| 13 | 92GK | 401.50 | 1 | 401.50 | 1 |
| 14 | 92KJ | 600.00 | 1 | 233.00 | 1 |
| 15 | 92JG | 600.00 | 1 | 275.00 | 1 |
| 16 | 92W | 600.00 | 0.5 | 600.00 | 0.5 |
| 17 | 92HA | 677.00 | 1 | 157.00 | 1 |
| 18 | 92JH | 686.50 | 1 | 600.00 | 1 |
| 19 | 92HB | 713.00 | 1 | 480.50 | 1 |
| 20 | 92MY | 720.00 | 1 | 400.00 | 1 |
| 21 | 92GS | 725.00 | 0.5 | 496.00 | 0.5 |
| 22 | 92HC | 737.00 | 1 | 121.00 | 1 |
| 23 | 92HD | 752.50 | 1 | 638.00 | 1 |
| 24 | 92KA | 758.00 | 0.5 | 472.00 | 0.5 |
| 25 | 92L | 790.00 | 1 | 90.00 | 1 |
| 26 | 92NW | 795.00 | 1 | 15.00 | 1 |
| 27 | 92NT | 805.00 | 1 | 15.00 | 1 |
| 28 | 92JF | 870.00 | 0.5 | 411.00 | 0.5 |
| 29 | 92JE | 925.00 | 0.5 | 420.00 | 0.5 |
| 30 | 92HE | 933.00 | 1 | 258.00 | 1 |
| 31 | 92RN | 1012.00 | 1 | 877.60 | 1 |
| 32 | 92HF | 1030.00 | 1 | 620.00 | 1 |
| 33 | 92PA | 1040.00 | 1 | 288.00 | 1 |
| 34 | 92NS | 1045.00 | 1 | 848.00 | 1 |
| 35 | 92LK | 1088.00 | 0.5 | 481.00 | 0.5 |
| 36 | 92HG | 1092.00 | 1 | 1048.00 | 1 |
| 37 | 92LP | 1124.00 | 1 | 406.00 | 1 |
| 38 | 92GD | 1175.00 | 2 | 800.00 | 2 |
| 39 | 92HH | 1191.00 | 1 | 236.00 | 1 |
| 40 | 92PC | 1226.00 | 1 | 472.00 | 1 |

92-TYPE RESISTOR - Phenolic Insulation

TWO WINDING RESISTORS WITH THREE LEADS
FIGURE 2

| Line No. | CODE NO. | WINDING A | TOLERANCE % | WINDING B | TOLERANCE % |
|-------------|-------------|-------------------------------|----------------|-------------------------------|----------------|
| | | NOMINAL RESISTANCE OHMS | | NOMINAL RESISTANCE OHMS | |
| 1 | 92GA | 1226.00 | 2 | 1135.00 | 0.5 |
| 2 | 92NM | 1250.00 | 1 | 338.00 | 1 |
| 3 | 92K | 1300.00 | 2 | 225.00 | 2 |
| 4 | 92HJ | 1313.00 | 1 | 428.00 | 1 |
| 5 | 92GL | 1348.00 | 1 | 255.00 | 1 |
| 6 | 92GN | 1378.00 | 1 | 364.00 | 1 |
| 7 | 92PE | 1380.00 | 1 | 83.90 | 1 |
| 8 | 92JC | 1430.00 | 0.5 | 702.00 | 0.5 |
| 9 | 92HK | 1470.00 | 1 | 635.00 | 1 |
| 10 | 92KK | 1545.00 | 1 | 560.00 | 1 |
| 11 | 92JD | 1550.00 | 0.5 | 684.00 | 0.5 |
| 12 | 92PB | 1595.00 | 1 | 795.00 | 1 |
| 13 | 92AB | 1616.00 | 1 | 965.00 | 1 |
| 14 | 92PG | 1662.00 | 1 | 780.00 | 1 |
| 15 | 92M | 1675.00 | 2 | 200.00 | 2 |
| 16 | 92GC | 1750.00 | 2 | 666.00 | 0.5 |
| 17 | 92LH | 1882.00 | 0.5 | 800.00 | 0.5 |
| 18 | 92AT | 2000.00 | 1 | 600.00 | 1 |
| 19 | 92MP | 2000.00 | 1 | 1760.00 | 1 |
| 20 | 92HL | 2196.00 | 1 | 428.00 | 1 |
| 21 | 92NK | 2305.00 | 0.5 | 495.00 | 0.5 |
| 22 | 92J | 2400.00 | 1 | 60.00 | 2 |
| 23 | 92KL | 2880.00 | 1 | 125.00 | 1 |
| 24 | 92KB | 3000.00 | 0.5 | 600.00 | 0.5 |
| 25 | 92MS | 3060.00 | 1 | 2120.00 | 1 |
| 26 | 92KF | 3290.00 | 0.5 | 1540.00 | 0.5 |
| 27 | 92NF | 3390.00 | 0.5 | 660.00 | 0.5 |
| 28 | 92RT | 3480.00 | 1 | 1170.00 | 1 |
| 29 | 92LW | 3710.00 | 1 | 971.00 | 1 |
| 30 | 92HY | 3956.00 | 0.5 | 1638.00 | 0.5 |
| 31 | 92GB | 4150.00 | 2 | 1450.00 | 2 |
| 32 | 92GT | 5150.00 | 2 | 3500.00 | 2 |

Phenolic Insulation - 92-TYPE RESISTOR

TWO WINDING RESISTORS WITH FOUR LEADS
FIGURE 6

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOLERANCE % | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|--|----------------|--|----------------|
| 1 | 92MD | 1.74 | 2 | 1.74 | 2 |
| 2 | 92ME | 2.74 | 2 | 2.74 | 2 |
| 3 | 92MF | 4.99 | 1 | 4.99 | 1 |
| 4 | 92KN | 5.00 | 5 | 5.00 | 5 |
| 5 | 92MG | 6.26 | 1 | 6.26 | 1 |
| 6 | 92MH | 7.15 | 1 | 7.15 | 1 |
| 7 | 92KP | 10.00 | 5 | 10.00 | 5 |
| 8 | 92KR | 15.00 | 5 | 15.00 | 5 |
| 9 | 92KS | 20.00 | 5 | 20.00 | 5 |
| 10 | 92MJ | 20.80 | 1 | 20.80 | 1 |
| 11 | 92KT | 25.00 | 5 | 25.00 | 5 |
| 12 | 92KU | 30.00 | 5 | 30.00 | 5 |
| 13 | 92KW | 35.00 | 5 | 35.00 | 5 |
| 14 | 92KY | 40.00 | 5 | 40.00 | 5 |
| 15 | 92LA | 45.00 | 5 | 45.00 | 5 |
| 16 | 92LB | 50.00 | 5 | 50.00 | 5 |
| 17 | 92LC | 55.00 | 5 | 55.00 | 5 |
| 18 | 92LD | 60.00 | 5 | 60.00 | 5 |
| 19 | 92LE | 65.00 | 5 | 65.00 | 5 |
| 20 | 92LF | 70.00 | 5 | 70.00 | 5 |
| 21 | 92RJ | 135.00 | 1 | 33.75 | 1 |
| 22 | 92RF | 314.00 | 1 | 56.25 | 1 |
| 23 | 92RH | 675.00 | 1 | 168.80 | 1 |
| 24 | 92NR | 743.00 | 1 | 536.00 | 0.5 |
| 25 | 92RG | 2860.00 | 1 | 4.00 | 5 |
| 26 | 92RS | 6000.00 | 0.5 | 3.00 | 2 |

92-TYPE RESISTOR - Phenolic Insulation

THREE WINDING RESISTORS WITH FOUR LEADS
 FIGURE 3

| Line No. | CODE NO. | WINDING A | | WINDING B | | WINDING C | |
|----------|----------|-------------------------|--------|-------------------------|--------|-------------------------|--------|
| | | NOMINAL RESISTANCE OHMS | TOL. % | NOMINAL RESISTANCE OHMS | TOL. % | NOMINAL RESISTANCE OHMS | TOL. % |
| 1 | 92NL | 210.00 | 1 | 69.80 | 1 | 28.00 | 1 |
| 2 | 92RP | 270.00 | 1 | 164.70 | 1 | 108.00 | 1 |
| 3 | 92LY | 390.00 | 1 | 199.00 | 1 | 71.00 | 1 |
| 4 | 92NB | 576.00 | 1 | 161.00 | 1 | 58.00 | 1 |
| 5 | 92JL | 626.00 | 1 | 329.00 | 1 | 555.00 | 1 |
| 6 | 92RR | 740.70 | 1 | 590.90 | 1 | 347.00 | 1 |
| 7 | 92MU | 1820.00 | 1 | 1000.00 | 1 | 800.00 | 1 |
| 8 | 92HM | 1957.00 | 2 | 496.00 | 1 | 496.00 | 1 |
| 9 | 92HU | 2647.00 | 0.5 | 1336.00 | 0.5 | 758.30 | 0.5 |
| 10 | 92HT | 2766.00 | 0.5 | 1467.00 | 0.5 | 1175.00 | 0.5 |
| 11 | 92HS | 3363.00 | 0.5 | 1752.00 | 0.5 | 1073.00 | 0.5 |
| 12 | 92HR | 4032.00 | 0.5 | 2051.00 | 0.5 | 1013.00 | 0.5 |

Phenolic Insulation - 92-TYPE RESISTORS

THREE WINDING RESISTORS WITH THREE LEADS
 FIGURE 4

| Line No. | CODE NO. | WINDING A | | WINDING B | | WINDING C | |
|-------------|-------------|-------------------------------|----------|-------------------------------|----------|-------------------------------|----------|
| | | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL RESISTANCE OHMS | TOL % |
| 1 | 92RD | 48.80 | 0.5 | 109.00 | 0.5 | 109.00 | 0.5 |
| 2 | 92PY | 55.10 | 0.5 | 104.70 | 0.5 | 104.70 | 0.5 |
| 3 | 92JT | 74.50 | 1 | 68.70 | 1 | 30.70 | 1 |
| 4 | 92JN | 81.50 | 1 | 35.20 | 1 | 51.60 | 1 |
| 5 | 92RC | 141.90 | 0.5 | 64.54 | 0.5 | 64.54 | 0.5 |
| 6 | 92JJ | 300.00 | 1 | 175.00 | 1 | 300.00 | 1 |
| 7 | 92KM | 300.00 | 1 | 300.00 | 1 | 150.00 | 1 |
| 8 | 92RB | 314.30 | 0.5 | 33.93 | 0.5 | 33.93 | 0.5 |
| 9 | 92ML | 569.00 | 1 | 15.79 | 1 | 15.79 | 1 |
| 10 | 92RA | 645.30 | 0.5 | 17.20 | 0.5 | 17.20 | 0.5 |
| 11 | 92NP | 1820.00 | 0.5 | 490.00 | 0.5 | 418.00 | 0.5 |

92-TYPE RESISTOR - Phenolic Insulation

THREE WINDING RESISTORS WITH FOUR LEADS
FIGURE 5

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOL % | WINDING B NOMINAL RESISTANCE OHMS | TOL % | WINDING C NOMINAL RESISTANCE OHMS | TOL % |
|----------|----------|--|----------|--|----------|--|----------|
| 1 | 92NE | 220.0 | 1 | 79.0 | 1 | 38.0 | 1 |
| 2 | 92NG | 317.0 | 1 | 75.0 | 1 | 36.0 | 1 |
| 3 | 92MR | 420.0 | 1 | 263.0 | 1 | 25.0 | 1 |
| 4 | 92LT | 522.0 | 1 | 3422.0 | 1 | 135.0 | 1 |
| 5 | 92JK | 622.0 | 1 | 638.0 | 1 | 555.0 | 1 |
| 6 | 92JR | 1665.0 | 1 | 482.0 | 1 | 482.0 | 1 |
| 7 | 92NH | 2595.0 | 0.5 | 857.0 | 0.5 | 520.0 | 0.5 |
| 8 | 92MP | 3448.0 | 1 | 590.0 | 1 | 263.0 | 1 |

Phenolic Insulation - 120-TYPE RESISTOR

SINGLE WINDING RESISTORS WITH TWO LEADS
FIGURE 1

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|-------------|-------------------------------|----------------|
| 1 | 120AB | 75.0 | 0.9 |
| 2 | 120G | 160.0 | 1 |
| 3 | 120H | 300.0 | 1 |
| 4 | 120AG | 400.0 | 1 |
| 5 | 120AF | 600.0 | 1 |
| 6 | 120M | 1500.0 | 0.5 |

120-TYPE RESISTOR - Phenolic Insulation

TWO WINDING RESISTORS WITH THREE LEADS
 FIGURE 2

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOLERANCE % | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|--|----------------|--|----------------|
| 1 | 120AC | 1.55 | 2 | 0.78 | 4 |
| 2 | 120AD | 6.11 | 1 | 3.11 | 1 |
| 3 | 120J | 7.50 | 2 | 5.00 | 2 |
| 4 | 120K | 20.00 | 1 | 10.00 | 2 |
| 5 | 120AE | 24.40 | 1 | 12.22 | 1 |
| 6 | 120L | 80.00 | 1 | 40.00 | 1 |

TWO WINDING RESISTORS WITH FOUR LEADS
 FIGURE 6

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOLERANCE % | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|--|----------------|--|----------------|
| 26 | 120N | 13.00 | 2 | 13.00 | 2 |

Phenolic Insulation - 123-TYPE RESISTOR

FIGURE 7

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS TERMS. 1-2 | TOLERANCE % |
|-------------|-------------|---|----------------|
| 1 | 123A | 71.0 | 2 |
| 2 | 123AD | 241.7 | 2 |
| 3 | 123AL | 564.0 | 1 |
| 4 | 123AK | 639.0 | 1 |
| 5 | 123AM | 825.0 | 1 |
| 6 | 123AC | 1099.0 | 2 |

123-TYPE RESISTOR - Phenolic Insulation

FIGURE 8

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS TERMS. 1-2 | TOL. % | NOMINAL RESISTANCE OHMS TERMS. 2-3 | TOL. % | NOMINAL RESISTANCE OHMS TERMS. 1-3 | TOL. % |
|-------------|-------------|---|-----------|---|-----------|---|-----------|
| 1 | 123AF | 597.0 | 0.5 | 60.0 | 0.5 | 597.0 | 0.5 |
| 2 | 123AP | 723.0 | 1 | 723.0 | 1 | 130.0 | 1 |
| 3 | 123AR | 873.0 | 1 | 873.0 | 1 | 106.0 | 1 |
| 4 | 123AT | 1169.5 | 1 | 1169.5 | 1 | 78.4 | 1 |

POWER RESISTORS - WIRE WOUND - CERAMIC CORES

VITREOUS ENAMEL INSULATION

Power resistors in code series fitting this description are tabulated below. Individual codes in these series have specific resistance values which fall within the resistance ranges shown. For example, the 44W resistor has a resistance value of $300 \pm 5\%$ ohms. The resistance ranges are not continuous between the minimum and maximum values shown. The minimum and maximum values do not necessarily represent extremes beyond which new designs could not be furnished.

| <u>CODE TYPE</u> | <u>APPROXIMATE NORMAL RATING (Note 1) WATTS</u> | <u>APPROXIMATE RESISTANCE RANGE OHMS</u> | <u>SECTION II PAGE</u> |
|----------------------|---|--|----------------------------|
| 44 | 30 | 6 to 20000 | 41 |
| 59 | 15 | 24 to 3500 | 43 |
| 60 | 15 | 230 to 385 | 45 |
| 67 | 22 | 10 to 3000 | 47 |
| 71 | 32 | 40 and 60 | 49 |
| 82 | 7.5 | 2 to 700 | 51 |
| 84 | 6 | 15 to 1500 | 53 |
| 85 | 20 | 220 and 13000 | 55 |
| 91 | 15 | 400 to 1600 | 57 |
| 96 | 25 | 0.25 to 15.75 | 59 |
| 100 | 5 | 10 to 3200 | 61 |
| 119 | 25 | 100 to 1500 | 65 |

NOTE 1: The heat dissipating characteristics of these resistors are as follows:

| <u>Power Dissipation Condition</u> | <u>Wattage Rating of Resistor</u> | <u>Temperature Rise</u> | <u>Ambient Temperature</u> |
|--|---|-----------------------------|--------------------------------|
| Normal Condition | Normal Rating | 250° F | 77° F |
| Trouble Condition | 2 x Normal Rating | 450° F | 77° F |

Ceramic Core, Enamel Insulation - 44-TYPE RESISTOR


DESCRIPTION

Power rating is 30 watts for continuous operation at 77° F ambient temperature.

Provided with a stud and nuts for mounting. Closest recommended mounting centers are 1 inch by 1-1/2 inches.

Single winding resistors.

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 44AN | 6.32 | 5 |
| 2 | 44AM | 6.8 | 5 |
| 3 | 44AB | 8.7 | 5 |
| 4 | 44M | 14.0 | 5 |
| 5 | 44AA | 16.0 | 2 |
| 6 | 44C | 18.1 | 5 |
| 7 | 44AL | 21.6 | 5 |
| 8 | 44AC | 26.8 | 5 |
| 9 | 44S | 30.0 | 5 |
| 10 | 44L | 36.6 | 5 |
| 11 | 44B | 45.0 | 5 |
| 12 | 44A | 52.5 | 5 |
| 13 | 44K | 54.2 | 5 |
| 14 | 44E | 58.0 | 5 |
| 15 | 44AD | 61.8 | 1 |
| 16 | 44R | 90.0 | 5 |
| 17 | 44J | 115.0 | 5 |
| 18 | 44G | 150.0 | 5 |
| 19 | 44P | 167.0 | 5 |
| 20 | 44D | 200.0 | 5 |
| 21 | 44N | 220.0 | 5 |
| 22 | 44W | 300.0 | 5 |
| 23 | 44Y | 450.0 | 5 |
| 24 | 44AE | 625.0 | 2 |
| 25 | 44AF | 1250.0 | 2 |
| 26 | 44U | 1500.0 | 5 |
| 27 | 44AG | 2500.0 | 2 |
| 28 | 44AH | 5000.0 | 2 |
| 29 | 44AJ | 10000.0 | 2 |
| 30 | 44AK | 20000.0 | 2 |

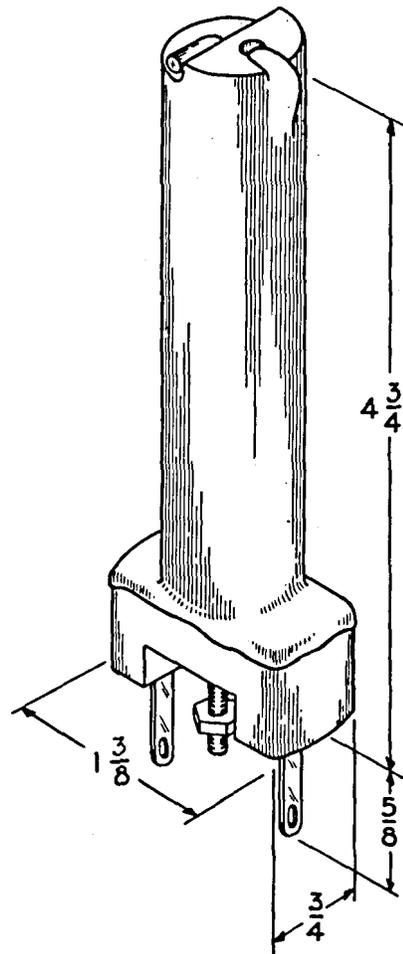


DESCRIPTION

Power rating is 15 watts for continuous operation at 77° F ambient temperature.

Arranged for mounting on mounting plates. Will mount on 7/8 inch horizontal centers and 1-5/16 inch vertical centers. Except for horizontal centers, will mount on panels drilled for 19-type resistors.

Single winding resistors.

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 59U | 24.0 | 1 |
| 2 | 59S | 28.0 | 1 |
| 3 | 59G | 60.0 | 5 |
| 4 | 59P | 90.0 | 5 |
| 5 | 59W | 98.0 | 1 |
| 6 | 59T | 103.5 | 1 |
| 7 | 59R | 107.5 | 5 |
| 8 | 59Y | 110.5 | 1 |
| 9 | 59K | 112.0 | 5 |
| 10 | 59D | 115.0 | 5 |
| 11 | 59E | 150.0 | 5 |
| 12 | 59H | 190.0 | 5 |
| 13 | 59C | 200.0 | 5 |
| 14 | 59F | 240.0 | 5 |
| 15 | 59L | 600.0 | 5 |
| 16 | 59M | 850.0 | 5 |
| 17 | 59N | 1000.0 | 5 |
| 18 | 59A | 3000.0 | 5 |
| 19 | 59B | 3500.0 | 5 |

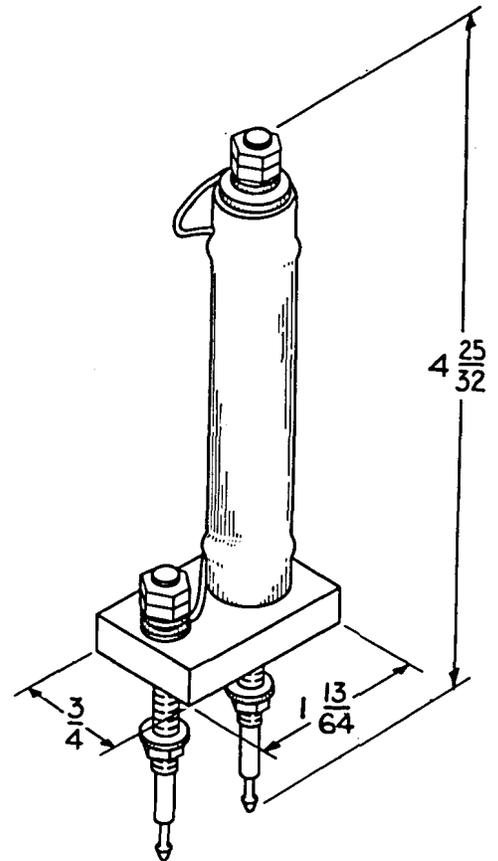

DESCRIPTION

Has two windings and three terminals, one terminal being common to both windings. Terminals for Windings A and B are arranged as shown in Fig. 1.

Arranged for mounting on mounting plates. Will mount on $7/8$ inch horizontal centers and $1-3/4$ inch vertical centers. Except for horizontal centers, will mount interchangeably with 19-type resistors.

Power ratings indicated in the table are for continuous operation at 77° F ambient temperature.

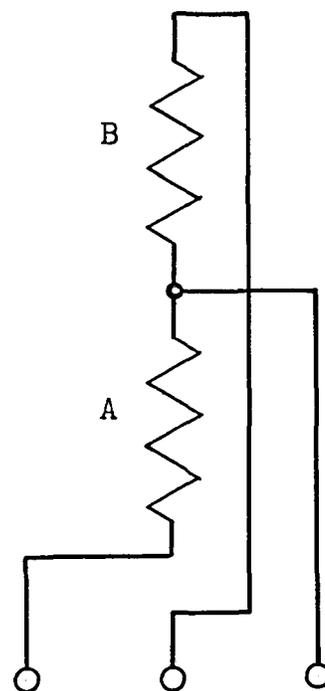
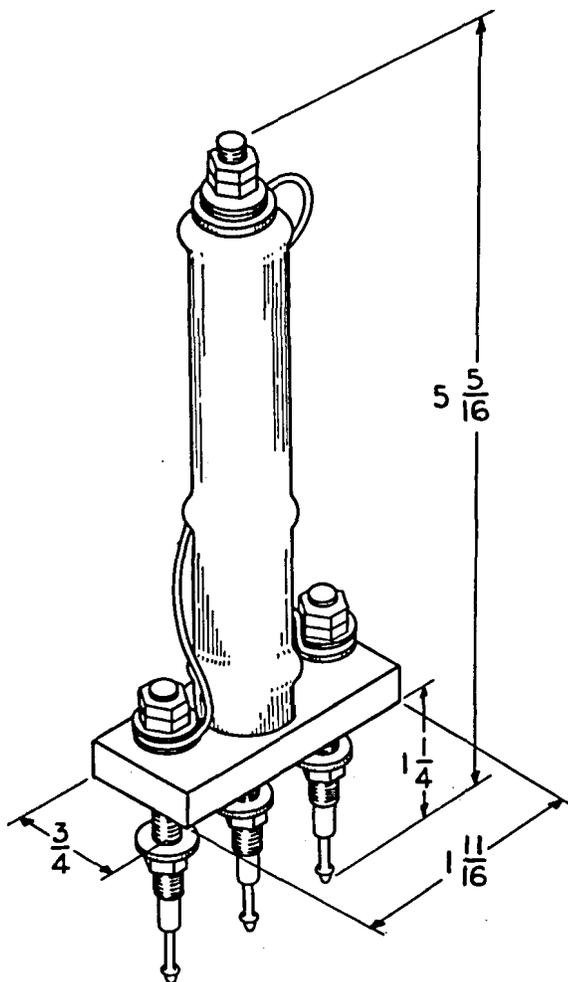


FIG. 1

60-TYPE RESISTOR - Ceramic Core, Enamel Insulation

| Line No. | CODE NO. | WINDING A | | | WINDING B | | |
|-------------|-------------|-------------------------------|---------------|-----------|-------------------------------|---------------|-----------|
| | | NOMINAL RESISTANCE OHMS | MAX. WATTS | TOL. % | NOMINAL RESISTANCE OHMS | MAX. WATTS | TOL. % |
| 1 | 60J | 90.0 | 5.9 | 1 | 140.0 | 9.1 | 1 |
| 2 | 60E | 110.5 | 5.0 | 1 | 220.0 | 10.0 | 5 |
| 3 | 60F | 110.5 | 4.4 | 1 | 270.0 | 10.7 | 1 |
| 4 | 60H | 115.0 | 7.5 | 5 | 115.0 | 7.5 | 5 |
| 5 | 60C | 115.0 | 6.5 | 5 | 150.0 | 8.5 | 5 |
| 6 | 60B | 115.0 | 5.2 | 5 | 220.0 | 9.9 | 5 |
| 7 | 60D | 115.0 | 4.5 | 5 | 270.0 | 10.5 | 1 |
| 8 | 60K | 150.0 | 7.5 | 5 | 150.0 | 7.5 | 5 |


DESCRIPTION

-Power rating is 22 watts for continuous operation at 77° F ambient temperature.

Will mount on 3/4 inch horizontal centers and 1 inch vertical centers. Intended to be mounted on 4-type resistor mounting. Has one soldering terminal, the other connection being made through the 4-type resistor mounting.

Single winding resistor.

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 67M | 10 | 5 |
| 2 | 67B | 120 | 5 |
| 3 | 67F | 300 | 5 |
| 4 | 67C | 600 | 5 |
| 5 | 67J | 800 | 5 |
| 6 | 67N | 856 | 1 |
| 7 | 67G | 1000 | 1 |
| 8 | 67D | 1100 | 5 |
| 9 | 67K | 1300 | 5 |
| 10 | 67E | 1500 | 5 |
| 11 | 67L | 1750 | 5 |
| 12 | 67A | 2000 | 5 |
| 13 | 67H | 3000 | 5 |

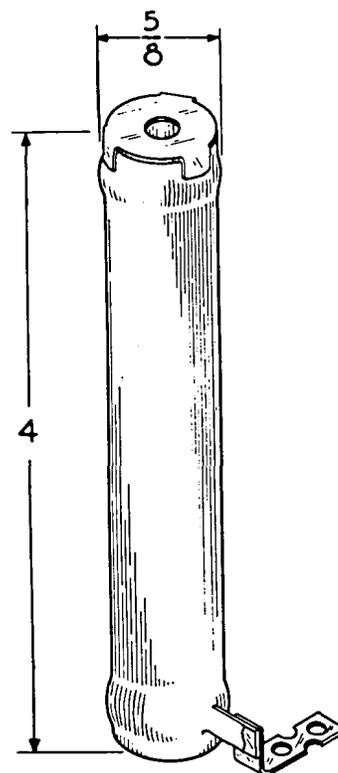


Ceramic Core, Enamel Insulation - 71-TYPE RESISTOR

DESCRIPTION

Power rating is 32 watts for continuous operation at 77° F ambient temperature.

Will mount on 1-3/4 inch horizontal and vertical centers.

Single winding resistor.

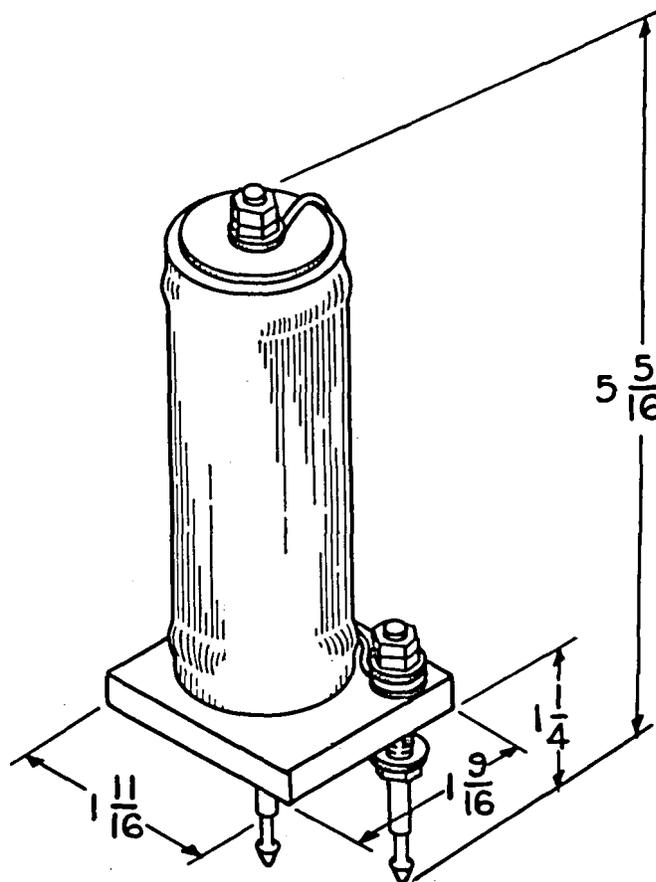

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 71A | 40 | 5 |
| 2 | 71B | 60 | 5 |


Ceramic Core, Enamel Insulation - 82-TYPE RESISTOR

DESCRIPTION

Power rating is 7.5 watts for continuous operation at 77° F ambient temperature. For each degree F that the ambient exceeds 77° F, the power rating decreases 0.4%.

Closest recommended mounting centers are 1-3/8 inches by 1-1/8 inches.

Single winding resistor.

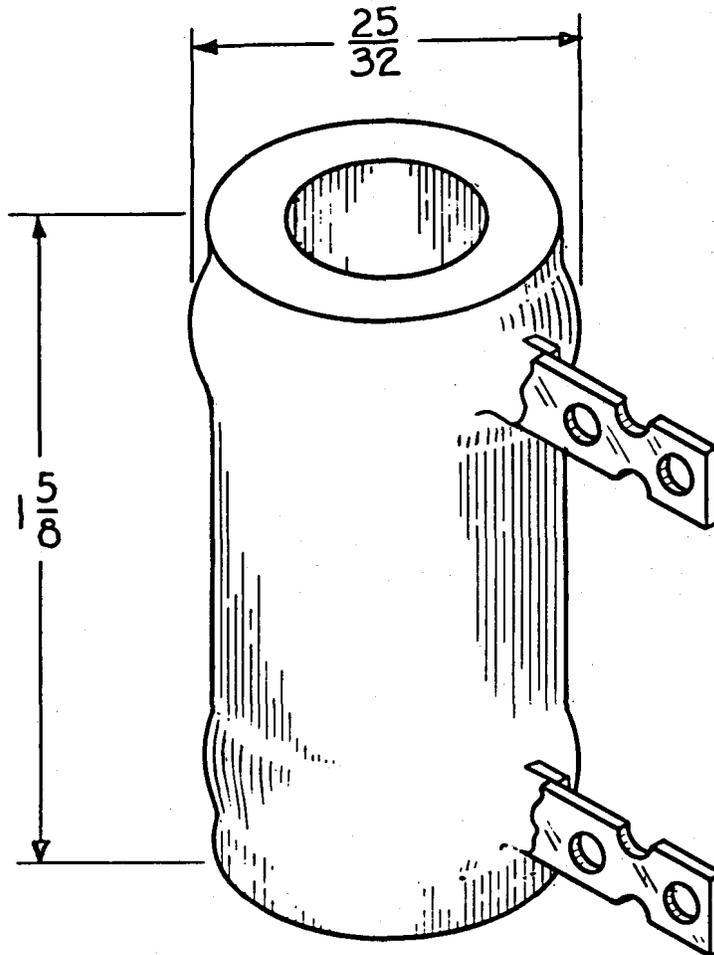

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 82F | 2 | 5 |
| 2 | 82B | 30 | 1 |
| 3 | 82A | 150 | 5 |
| 4 | 82D | 225 | 1 |
| 5 | 82G | 400 | 5 |
| 6 | 82C | 500 | 1 |
| 7 | 82E | 700 | 5 |

Ceramic Core, Enamel Insulation - 84-TYPE RESISTOR


DESCRIPTION

Power rating is 6.0 watts for continuous operation at 77° F ambient temperature.

Equipped with two flexible leads. May be mounted on a threaded stud through the center of the resistor.

Closest recommended mounting centers are 7/8 inch by 7/8 inch.

Single winding resistor.

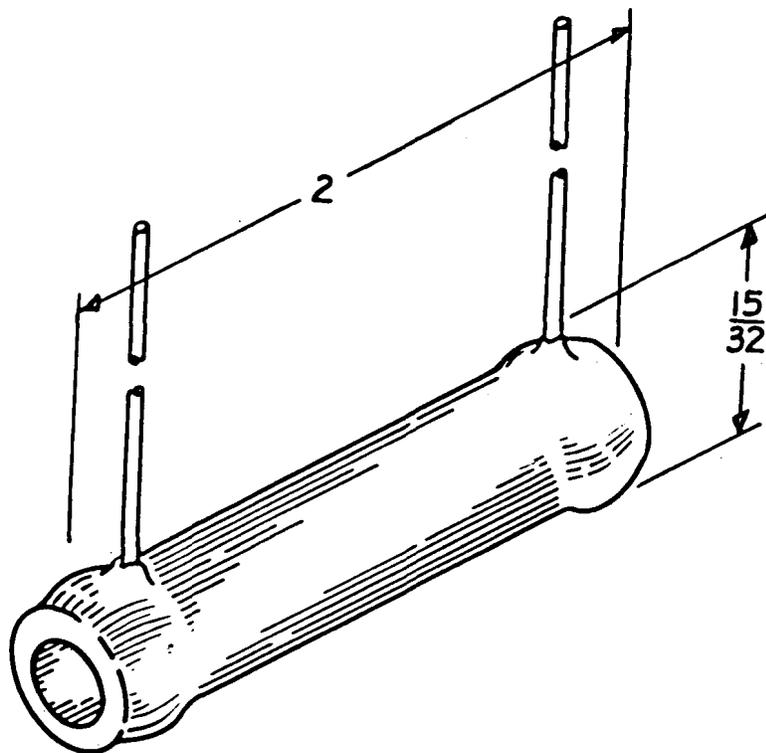

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 84E | 15.6 | 1 |
| 2 | 84F | 20.0 | 1 |
| 3 | 84D | 31.2 | 1 |
| 4 | 84A | 400.0 | 5 |
| 5 | 84B | 600.0 | 5 |
| 6 | 84C | 800.0 | 5 |
| 7 | 84H | 900.0 | 5 |
| 8 | 84G | 1500.0 | 5 |


Ceramic Core, Enamel Insulation - 85-TYPE RESISTOR

DESCRIPTION

Power rating is 20 watts for continuous operation at 77° F ambient temperature.

Closest recommended mounting centers are 1-3/8 inches by 1-7/8 inches.

Single winding resistor.

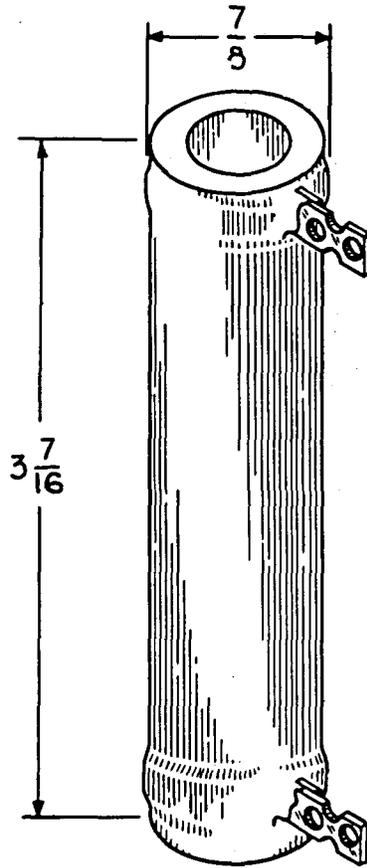

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 85D | 220 | 5 |
| 2 | 85C | 13000 | 5 |


Ceramic Core, Enamel Insulation - 91A RESISTOR

DESCRIPTION

Has three windings connected in series. Equipped with four flexible leads, one at each end and one at each winding junction. Power rating is 15 watts for continuous operation at 77° F ambient temperature. Resistance values do not vary more than ±5%.

May be mounted on a threaded stud through the center of the resistor.


Closest recommended mounting centers are 1-1/8 inch by 1-1/8 inch.

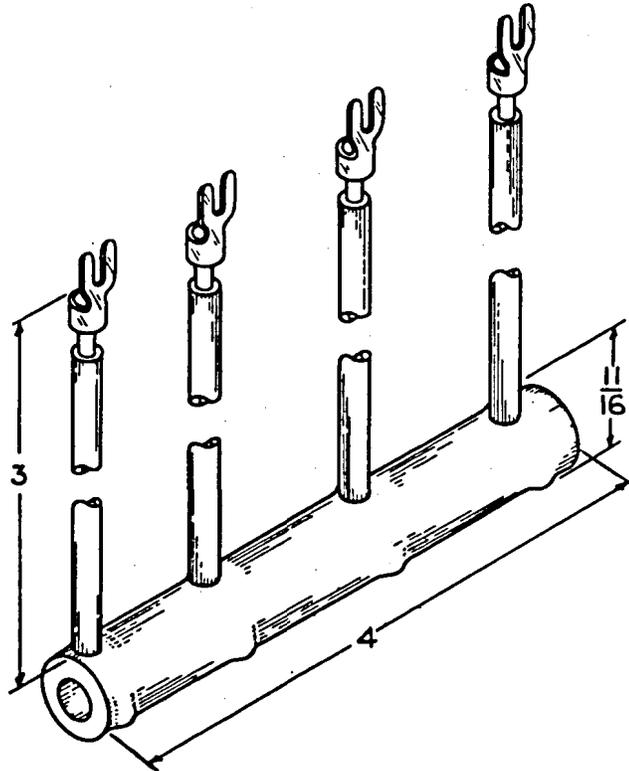

| CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | WINDING B NOMINAL RESISTANCE OHMS | WINDING C NOMINAL RESISTANCE OHMS |
|----------|--|--|--|
| 91A | 400 | 600 | 600 |

DESCRIPTION

Has six windings consecutively connected in series and is provided with a tap at each winding junction. Equipped with a medium lamp base. Intended for use interchangeably with ballast lamps where voltage regulation permits. Power rating is 25 watts for continuous operation at 77° F ambient temperature.

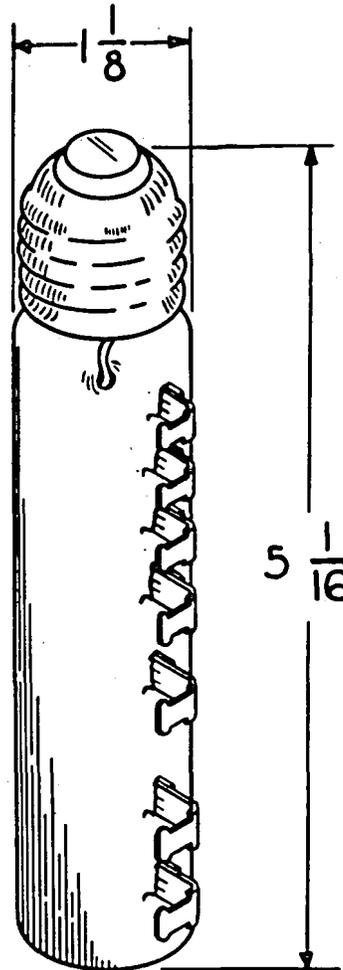

| CODE NO. | WINDING STARTING NEXT TO EDISON BASE | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|--------------------------------------|-------------------------|-------------|
| 96A | 1st | 0.25 | 10 |
| | 2nd | 0.50 | 10 |
| | 3rd | 1.00 | 5 |
| | 4th | 2.00 | 5 |
| | 5th | 4.00 | 5 |
| | 6th | 8.00 | 5 |

Ceramic Core, Enamel Insulation - 100-TYPE RESISTOR

DESCRIPTION

Have one or more windings, as indicated. Windings are connected in series and taps are provided at the winding junctions. Power rating is 5 watts for continuous operation at 77° F ambient temperature.

Can be mounted by means of a 9A or 9B resistor mounting. Closest recommended mounting centers are 1-3/8 inch by 1 inch.

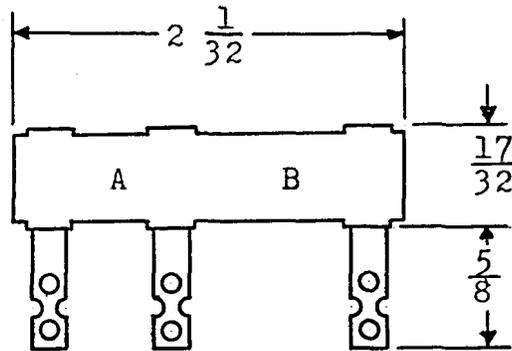


FIG. 1

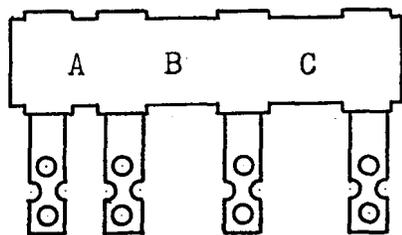


FIG. 2


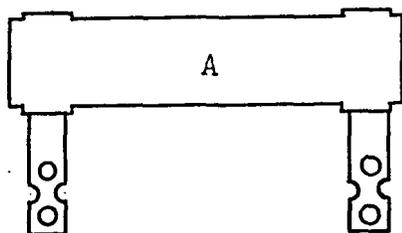


FIG. 3

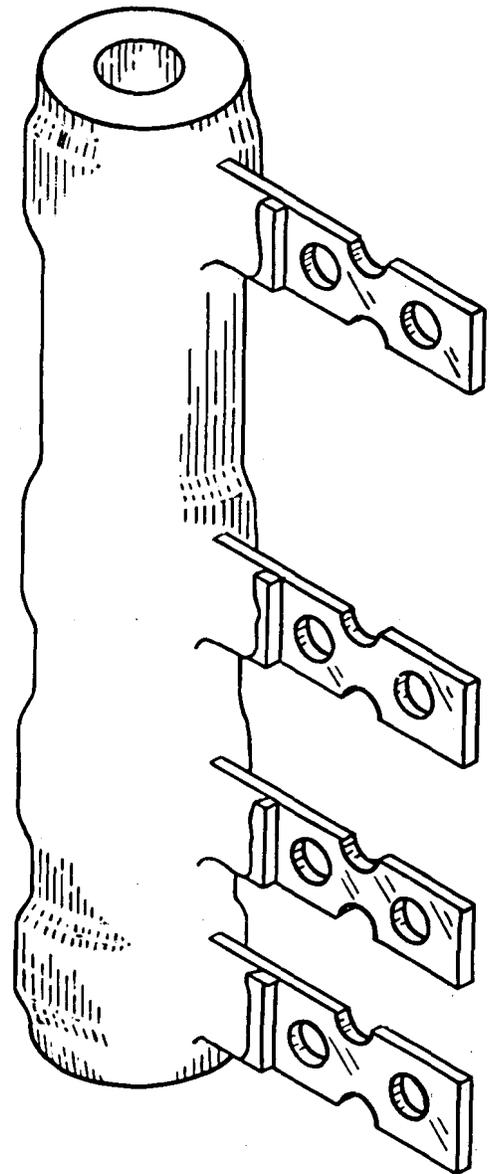

100-TYPE RESISTOR - Ceramic Core, Enamel Insulation

SINGLE WINDING RESISTOR WITH TWO LUGS
 FIGURE 3

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % | RATING WATTS MAX. |
|----------|----------|-------------------------|-------------|-------------------|
| 1 | 100G | 300 | 5 | 6 |

TWO WINDING RESISTOR WITH THREE LUGS
 FIGURE 1

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % | RATING WATTS MAX. |
|----------|----------|-----------------------------------|-----------------------------------|-------------|-------------------|
| 11 | 100F | 100 | 800 | 5 | 5 |
| 12 | 100C | 500 | 200 | 5 | 5 |
| 13 | 100B | 1075(a) | 220 | 5 | 5 |
| 14 | 100A | 1600 | 1600 | 5 | 5 |

(a) Plus 5%; minus 10%

Ceramic Core, Enamel Insulation - 100-TYPE RESISTOR

THREE WINDING RESISTOR WITH FOUR LUGS
 FIGURE 2


| Line No. | CODE NO. | WINDING A | WINDING B | WINDING C | TOLERANCE % | RATING WATTS MAX. |
|-------------|-------------|-------------------------------|-------------------------------|-------------------------------|----------------|-------------------------|
| | | NOMINAL RESISTANCE OHMS | NOMINAL RESISTANCE OHMS | NOMINAL RESISTANCE OHMS | | |
| 1 | 100D | 10 | 20 | 40 | 5 | 4 |
| 2 | 100H | 60 | 60 | 60 | 5 | 4 |
| 3 | 100E | 80 | 160 | 320 | 5 | 4 |

Ceramic Core, Enamel Insulation - 119A RESISTOR

DESCRIPTION

Has four windings connected in series. Resistance values are held with limits of $\pm 5\%$. Power rating is 25 watts for continuous operation at 77° F ambient temperature.

Closest recommended mounting centers are 1-3/4 inch by 1-1/4 inch.

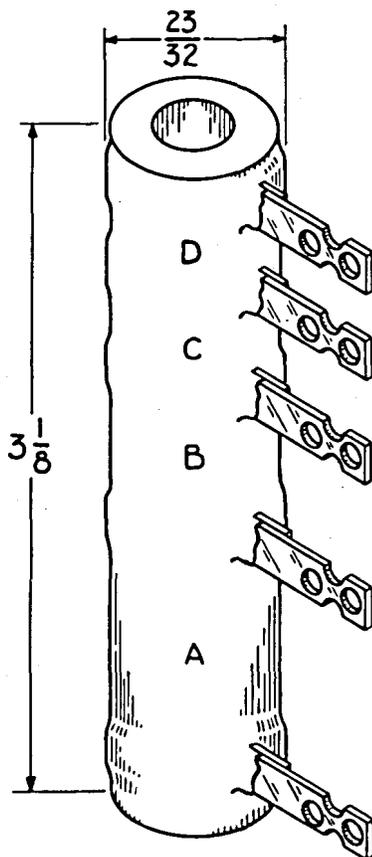


| CODE NO. | STAMPED AT | NOMINAL RESISTANCE OHMS |
|----------|------------|-------------------------|
| 119A | A | 800 |
| | B | 400 |
| | C | 200 |
| | D | 100 |

Axial Leads - 234 & 235 Type RESISTOR

DESCRIPTION

These resistors consist of a winding of resistance wire over a core of insulating material enveloped in a protective sleeve of colored polyethylene. The color identifies each particular combination of nominal resistance and tolerance. They are provided with tinned axial leads.

Power rating is 0.5 watt for 234 type and 1.0 watt for 235 type at 60°C (140°F) ambient temperature. For each degree centigrade that the ambient exceeds 60°C, the power rating decreases approximately 2-1/4 per cent.

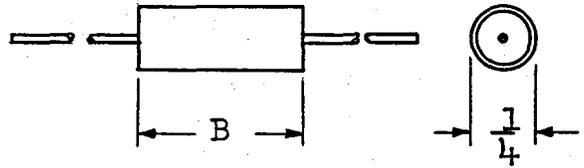

| Line No. | CODE | RESISTANCE - OHMS | | | COLOR | DIM. B |
|----------|-------|-------------------|-------|-------|-------------|--------|
| | | Nom. | Max. | Min. | | |
| 1 | 234A | 4.64 | 4.70 | 4.58 | Brown | .656 |
| 2 | 234B | 14 | 14.15 | 13.85 | White | .625 |
| 3 | 234C | 18 | 18.19 | 17.81 | Gray | .656 |
| 4 | 234D | 28 | 28.29 | 27.71 | Red | .625 |
| 5 | 234E | 47.5 | 47.99 | 47.01 | Orange | .656 |
| 6 | 234K | 56.2 | 56.49 | 55.91 | Pink | .625 |
| 7 | 234F | 68.1 | 68.8 | 67.4 | Light Blue | .656 |
| 8 | 234P* | 220 | 231 | 209 | Black | .656 |
| 9 | 234N | 301 | 316 | 286 | Light Green | .656 |
| 10 | 234G | 750 | 758 | 742 | Green | .656 |
| 11 | 234H | 795 | 804 | 788 | Blue | .625 |
| 12 | 234L | 856 | 860 | 852 | Tan | .625 |
| 13 | 234M | 976 | 981 | 971 | Purple | .656 |
| 14 | 234J | 1270 | 1283 | 1257 | Yellow | .625 |
| 15 | 235A | 1370 | 1384 | 1356 | Yellow | 1.032 |
| 16 | 235B | 1600 | 1616 | 1584 | Gray | 1.000 |
| 17 | 235C | 1960 | 1980 | 1940 | Purple | 1.000 |
| 18 | 235D | 2490 | 2515 | 2465 | Brown | 1.000 |
| 19 | 235E | 2550 | 2576 | 2524 | Orange | 1.000 |
| 20 | 235F | 3200 | 3232 | 3168 | Light Blue | 1.000 |
| 21 | 235G | 5110 | 5161 | 5059 | Green | 1.000 |

* Has a nominal temperature coefficient of 6000ppm/°C.


DESCRIPTION

Wire-wound resistor consisting of an inductive winding on a core of insulating material and covered with plastic tubing. Equipped with axial tinned leads.

Has a special temperature coefficient of $+500 \pm 50$ ppm/ $^{\circ}\text{C}$.

Power rating is 1.0 watt at 60°C (140°F) ambient temperature. For each degree C that the ambient exceeds 60°C , the power rating decreases approximately $2\frac{1}{4}$ per cent.

Resistance value is $562 \pm 1\%$ ohms.

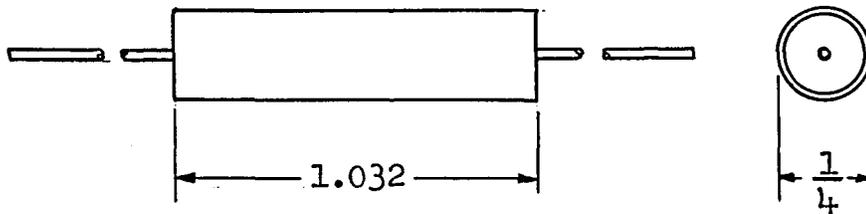

**III PRECISION TYPES
FAMILY CODE**



PRECISION TYPES
FAMILY CODE



WIRE WOUND RESISTORS - FAMILY CODES

Jan 1959

III-1

WIRE WOUND RESISTORS - FAMILY CODES

| Line No. | CODE NO. | RESISTANCE RANGE OHMS | TOLERANCE ±% | CHARACTERISTICS |
|----------|----------|-----------------------|-----------------|-----------------|
| 1 | 64A | 1 to 13000 | 5 | Note 1 |
| 2 | 64B | 2.5 to 13000 | 2 | |
| 3 | 64C | 5 to 5800 | 1 | |
| 4 | 64D | 10 to 5800 | 0.5 | |
| 5 | 64E | 50 to 5800 | 0.1 | |
| 6 | 64F | 20 to 5800 | 0.25 | |
| 7 | | | | |
| 8 | 65B | 200 to 12000 | 2 | Note 1 |
| 9 | 65C | 200 to 5400 | 1 | |
| 10 | | | | |
| 11 | 106A | 0.4 to 30000 | 1 | |
| 12 | 106B | 3 to 30000 | 0.25 | Note 3 |
| 13 | 106C | 10 to 12000 | 0.1 | |
| 14 | 106D | 0.1 to 3.0 | 2 + 0.02 ohm | |
| 15 | | | | |
| 16 | 107A | 0.4 to 250000 | 1 | Note 4 |
| 17 | 107B | 7 to 250000 | 0.25 | |
| 18 | | | | |
| 19 | 136A | 4.5 to 1299 | 1 | Note 7 |
| 20 | 136B | 4.5 to 1299 | 2 | |
| 21 | 136C | 8.0 to 1299 | 0.5 | |
| 22 | | | | |
| 23 | 137A | 1300 to 400000 | 1 | Note 7 |
| 24 | 137B | 1300 to 400000 | 2 | |
| 25 | 137C | 1300 to 400000 | 0.5 | |
| 26 | | | | |
| 27 | 138A | 2.5 to 183500 | 1 | Note 7 |
| 28 | 138C | 2.5 to 183500 | 0.5 | |
| 29 | | | | |
| 30 | 143A | 10 to 400 | 1 | Notes 9 & 10 |
| 31 | 143B | 10 to 400 | 0.25 | |
| 32 | | | | |
| 33 | 216A | 10 to 10500 | 1 | |
| 34 | | | | |
| 35 | 217A | 4990 to 80600 | 1 | |
| 36 | 217C | 4990 to 80600 | 0.1 | |
| 37 | | | | |
| 38 | 227A | 1 to 1270 | 1 + 0.01 ohm | Note 7 |
| 39 | 227C | 0.1 to 1270 | 5 + 0.01 ohm | |
| 40 | 227D | 2.0 to 1270 | 0.5 + 0.01 ohm | |
| 41 | 227E | 900 to 1270 | 0.25 + 0.01 Ohm | |
| 42 | | | | |
| 43 | 228A | 1290 to 5110 | 1 | Note 7 |
| 44 | 228D | 1290 to 5110 | 0.5 | |
| 45 | | | | |
| 46 | 241D | 4990 to 250000 | 0.5 | Notes 18 & 19 |
| 47 | | | | |
| 48 | 242C | 100 to 4020 | 5 | Note 20 |
| 49 | | | | |
| 50 | | | | |

WIRE WOUND RESISTORS - FAMILY CODES

| RATING WATTS | AMBIENT TEMP. | DERATING | BODY MATERIAL | ILLUS- TRATION | Line No. |
|------------------------------|------------------|----------|---------------------|-------------------|-------------|
| Notes 2 & 12 | 104° F | | Ceramic | III-7 | 1 |
| | | | | | 2 |
| | | | | | 3 |
| | | | | | 4 |
| | | | | | 5 |
| | | | | | 6 |
| | | | | | 7 |
| Notes 2 & 12 | 104° F | | Ceramic | III-7 | 8 |
| | | | | | 9 |
| 0.25 0.25 0.25 0.10 | 150° F | Note 6 | Phenolic | III-8 | 10 |
| | | | | | 11 |
| | | | | | 12 |
| | | | | | 13 |
| Notes 5 & 12 | 150° F | Note 6 | Phenolic | III-8 | 14 |
| | | | | | 15 |
| 0.25 | 77° F | | Note 13 | III-8 | 16 |
| | | | | | 17 |
| 0.25 | 77° F | | Note 14 | III-8 | 18 |
| | | | | | 19 |
| 1.0 | 77° F | | Note 15 | III-8 | 20 |
| | | | | | 21 |
| 0.1 | 104° F | | Phenolic | III-8 | 22 |
| | | | | | 23 |
| 0.25 | 150° F | Note 8 | Ceramic | III-8 | 24 |
| | | | | | 25 |
| Note 11 | 150° F | Note 8 | Ceramic | III-8 | 26 |
| | | | | | 27 |
| 0.5 | 140° F | Note 16 | Phenolic Note 17 | III-8 | 28 |
| | | | | | 29 |
| 1.0 | 140° F | Note 16 | Phenolic Note 17 | III-8 | 30 |
| | | | | | 31 |
| Note 18 | 140° F | Note 6 | Phenolic | III-8 | 32 |
| | | | | | 33 |
| 0.25 | 150° F | Note 6 | Phenolic | III-8 | 34 |
| | | | | | 35 |
| | 150° F | | | | 36 |
| | | | | | 37 |
| | 150° F | | | | 38 |
| | | | | | 39 |
| | 150° F | | | | 40 |
| | | | | | 41 |
| | 150° F | | | | 42 |
| | | | | | 43 |
| | 150° F | | | | 44 |
| | | | | | 45 |
| | 150° F | | | | 46 |
| | | | | | 47 |
| | 150° F | | | | 48 |
| | | | | | 49 |
| | | | | | 50 |

WIRE WOUND RESISTORS - FAMILY CODES

| Line No. | CODE NO. | RESISTANCE RANGE OHMS | TOLERANCE ±% | CHARACTERISTICS |
|----------|----------|-----------------------|--------------|-----------------|
| 1 | 244A | 100 to 4020 | 1 | Note 21 |
| 2 | 244B | 100 to 4020 | 2 | |
| 3 | | | | |
| 4 | 245B | 340 to 16200 | 2 | Note 21 |
| 5 | | | | |
| 6 | 248C | 1 to 1290 | 5 ± 0.01 ohm | Notes 12 & 23 |

WIRE WOUND RESISTORS - FAMILY CODES

| <u>RATING WATTS</u> | <u>AMBIENT TEMP.</u> | <u>DERATING</u> | <u>BODY MATERIAL</u> | <u>ILLUS- TRATION</u> | <u>Line No.</u> |
|-------------------------|--------------------------|-----------------|--------------------------|---------------------------|---------------------|
| 0.25 | 150° F | Note 6 | Phenolic | III-8 | 1 |
| | | | | | 2 |
| Note 22 | 150° F | Note 6 | Phenolic | III-8 | 3 |
| | | | | | 4 |
| 0.5 | 170° F | Note 24 | Phenolic | III-8 | 5 |
| | | | | | 6 |

WIRE WOUND RESISTORS - FAMILY CODES

1. 64- and 65-type resistors differ in method of winding. For minimum phase angle in the resistance range of 1 to 200 ohms use 64-type and for resistance ranges above 200 ohms use 65-type.
2. Ratings in Watts:


| | |
|------------------|-----------|
| 1 to 2 ohms | 0.1 watt |
| 2 to 10 ohms | 0.25 watt |
| 10 to 13000 ohms | 1.0 watt |
3. 106B resistor not recommended for general use above 12000 ohms because of high temperature coefficient of resistance.
4. Not recommended for general use above 90000 ohms because of high temperature coefficient of resistance.
5. Ratings in Watts:

| | |
|-----------------------|------------|
| 0 to 60 ohms | 0.25 watt |
| 60 to 14990 ohms | 0.375 watt |
| 15000 to 29990 ohms | 0.50 watt |
| 30000 to 59990 ohms | 0.75 watt |
| 60000 to 89990 ohms | 1.0 watt |
| 90000 to 149900 ohms | 0.75 watt |
| 150000 to 250000 ohms | 1.0 watt |
6. Wattage rating decreases 1% for each degree F that the ambient temperature exceeds 150° F.
7. Resistor is inductively wound.
8. Wattage rating decreases approximately 1.8% for each degree F that the ambient temperature exceeds 150° F.
9. Bifilar winding.
10. Low time constant.
11. Ratings in Watts:

| | |
|---------------------|------------|
| 4990 to 14900 ohms | 0.375 watt |
| 15000 to 29800 ohms | 0.50 watt |
| 30100 to 59700 ohms | 0.75 watt |
| 60400 to 80600 ohms | 1.0 watt |
12. Rating in watts for trouble condition is two times normal rating.
13. Single layer unidirectional winding on a phenolic fiber tube covered with Vincellatate muslin. Winding terminates in two flexible axial insulated leads.
14. Multilayer unidirectional winding covered with Vincellatate muslin. Winding terminates in two flexible axial insulated leads.
15. Inductive single layer winding on spool having brass core and phenolic spool heads. Covered with Vincellatate muslin.
16. Wattage rating decreases approximately 2-1/4% for each degree C that the ambient temperature exceeds 60°C (140° F).
17. Conformal coating of plastic.
18. Ratings in Watts:

| | |
|-----------------------|-----------|
| 4990 to 12490 ohms | 0.25 watt |
| 12500 to 24990 ohms | 0.50 watt |
| 25000 to 49900 ohms | 0.75 watt |
| 50000 to 89900 ohms | 1.0 watt |
| 90000 to 149000 ohms | 0.75 watt |
| 150000 to 250000 ohms | 1.0 watt |
19. Has positive temperature coefficient of 140±30 ppm/°C and low reactance, making the resistor suitable for use at high frequencies.
20. Has a positive temperature coefficient of resistance of 5190±270 ppm/°C.
21. Has a positive temperature coefficient of resistance of 5200±300 ppm/°C.
22. Ratings in Watts:

| | |
|---------------------|------------|
| 340 to 2670 ohms | 0.375 watt |
| 2740 to 5360 ohms | 0.50 watt |
| 5490 to 10700 ohms | 0.75 watt |
| 11000 to 16200 ohms | 1.00 watt |
23. Has a positive temperature coefficient of resistance of 3500 ppm/°C.
24. Wattage rating decreases 1-1/4% for each degree F that the ambient temperature exceeds 170° F. Trouble wattage rating decreases 0.8% for each degree F that the ambient temperature exceeds 150° F.

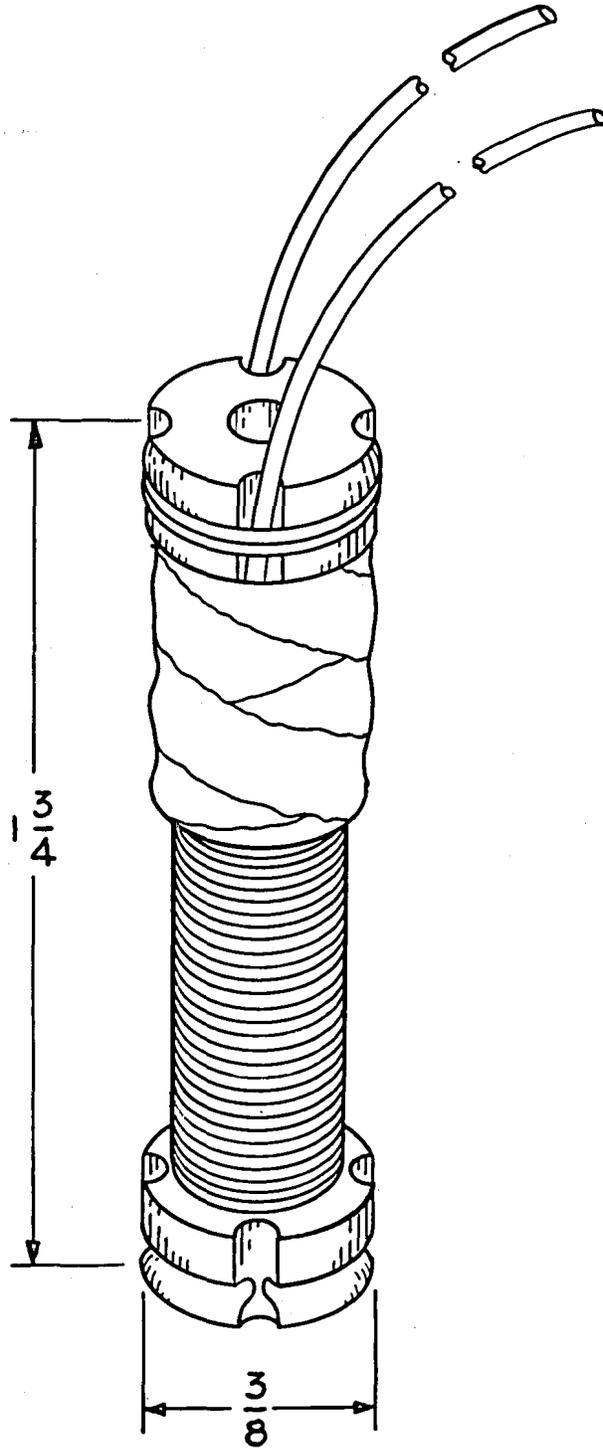

64- and 65-Type Resistors

WIRE WOUND RESISTORS - FAMILY CODES




DIMENSIONS - INCHES

| CODE TYPE | BODY | | LEADS | |
|--------------|---------|-----------------|---------|--------------|
| | LENGTH | DIAMETER | LENGTH | DIAMETER |
| 106 | 1 | .328 | 1-1/2 | .026 |
| 107 | 1-17/32 | .518 | 1-1/2 | .037 |
| *136 | 1-5/16 | 13/32 | 1-13/32 | 22 Ga H Wire |
| *137 | 1-5/16 | 13/32 | 1-13/32 | 22 Ga H Wire |
| 143 | 9/16 | 7/32 | 1-7/16 | .026 |
| 216 | 1 | 3/8 | 2 | .026 |
| 217 | 1-1/2 | 19/32 | 2 | .037 |
| 227 | 5/8 | .250 or .283(a) | 1-7/16 | .033 |
| 228 | 1 | .250 | 1-7/16 | .033 |
| 241 | 1-17/32 | .518 | 1-1/2 | .032 |
| 242 | 1-17/32 | .518 | 1-1/2 | .032 |
| 244 | 1-17/32 | .518 | 1-1/2 | .032 |
| 245 | 1-17/32 | .518 | 1-1/2 | .032 |
| 248 | 1 | .328 | 1-1/2 | .032 |

* Refer to this figure for general outline only. For construction, See Notes 13 and 14, Page III-6, for 136- and 137-types respectively.

(a) Resistors within range of 0.1 to 3.83 ohms have max. diameter of 0.283 inches. All others have max. diameter of 0.250 inch.

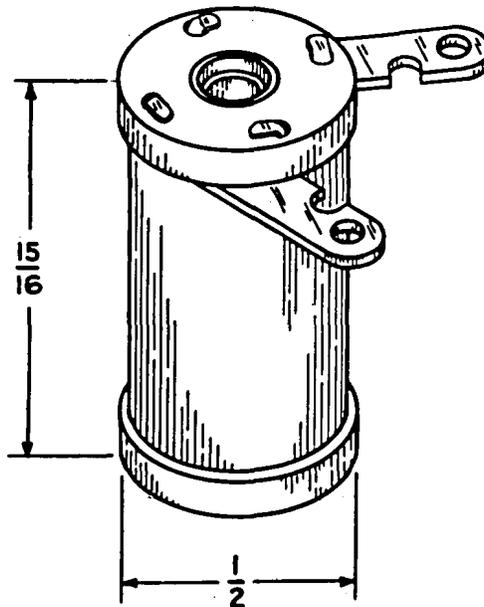

138-Type Resistors

DESCRIPTION

These resistors consist essentially of a ceramic core having a coating of deposited carbon. See the figures on the following pages identified by code designations for dimensions, leads, terminals, and mounting information.

RESISTANCE VALUE

See data table on following page for resistance range and TABLE 1, Page vii in the Introduction for standard resistance values.

RESISTANCE TOLERANCES

In general, the tolerances expressed are \pm values as tabulated. The 222A and 223B resistors, in addition to overall tolerances of $\pm 1\%$, have distribution requirements and when ordered in quantity are packaged in groups of five. The resistors in each group of five have resistance values substantially evenly distributed above and below the nominal resistance value ordered and are within the $\pm 1\%$ tolerance limits. When less than five resistors are ordered, the resistors furnished have values within the $\pm 1\%$ tolerance limits. The groups of five resistors are divided into three cells as specified in the table and Note 13, Page III-14.

CHARACTERISTICS

The column headed "Characteristics" is used where special qualities, limitations, or requirements apply.

DEPOSITED CARBON RESISTORS - FAMILY CODES

| Line No. | CODE NO. | RESISTANCE RANGE | TOLERANCE |
|----------|----------|------------------------|--------------------|
| 1 | 144A | 50 ohms to 5 Meg. | ±1% |
| 2 | | | |
| 3 | 144B | | ±2% |
| 4 | 144C | | ±5% |
| 5 | 144E | | ±1% |
| 6 | | | |
| 7 | 144F | | ±2% |
| 8 | 144G | | ±5% |
| 9 | | | |
| 10 | | | |
| 11 | 145A | 1 ohm to 5 Meg. | ±(1% +0.01 ohm) |
| 12 | | | |
| 13 | 145B | | ±2% |
| 14 | 145C | | ±5% |
| 15 | 145E | 0.288 ohm to 7000 ohms | ±(1/2% +0.002 ohm) |
| 16 | | | |
| 17 | | | |
| 18 | 146A | 1 ohm to 5 Meg. | ±(1% +0.01 ohm) |
| 19 | | | |
| 20 | 146B | | ±2% |
| 21 | 146C | | ±5% |
| 22 | 146E | 0.4 ohm to 3.999 ohms | ±0.02 ohm |
| 23 | | 4.0 ohms to 20000 ohms | ±(1/2% +0.002 ohm) |
| 24 | | | |
| 25 | | | |
| 26 | 147A | 50 ohms to 30 Meg. | ±1% |
| 27 | | | |
| 28 | 147B | 50 ohms to 50 Meg. | ±2% |
| 29 | 147C | 50 ohms to 50 Meg. | ±5% |
| 30 | 147D | 50 ohms to 30 Meg. | ±1% |
| 31 | | | |
| 32 | 147E | 50 ohms to 50 Meg. | ±2% |
| 33 | 147F | 50 ohms to 50 Meg. | ±5% |
| 34 | | | |
| 35 | | | |
| 36 | 149A | 0.300 ohm to 1000 ohms | Note 20 |
| 37 | | | |
| 38 | 149B | | Note 20 |
| 39 | | | |
| 40 | | | |
| 41 | 150A | 1.0 ohm to 100 ohms | Note 22 |
| 42 | | | |
| 43 | | | |
| 44 | 151A | 5 ohms to 5000 ohms | ±1% |
| 45 | | | |
| 46 | | | |
| 47 | 152A | 20 ohms to 10 Meg. | ±5% |
| 48 | | | |
| 49 | | | |
| 50 | | | |

DEPOSITED CARBON RESISTORS - FAMILY CODES

| RATING WATTS | AMBIENT TEMP. | DERATING | CHARACTER- ISTICS | FINISH OR COVER | ILLUS- TRATION | Line No. |
|-----------------|------------------|----------------|----------------------|-----------------------|-------------------|-------------|
| 1 | 30° C | Notes 1 & 2 | Note 27 | Note 3 | III-17 | 1 |
| 1 | | | | | III-17 | 2 |
| 1 | | | | | III-17 | 3 |
| 1 | | | | Notes 3 & 4 | III-17 | 4 |
| 1 | | | | | III-17 | 5 |
| 1 | | | | | III-17 | 6 |
| 1 | | | | | III-17 | 7 |
| 1 | | | | | III-17 | 8 |
| | | | | | | 9 |
| 0.5 | 30° C | Notes 1 & 5 | Note 28 | Note 4 | III-17 | 10 |
| 0.5 | | | | | III-17 | 11 |
| 0.5 | | | | | III-17 | 12 |
| 0.5 | | | | | III-17 | 13 |
| | | | | | | 14 |
| | | | | | | 15 |
| | | | | | | 16 |
| 1 | 30° C | Notes 1 & 6 | Notes 15 & 28 | Note 7 | III-18 | 17 |
| 1 | | | | | III-18 | 18 |
| 1 | | | | | III-18 | 19 |
| 1 | | | | | III-18 | 20 |
| 1 | | | | | III-18 | 21 |
| | | | | | | 22 |
| | | | | | | 23 |
| | | | | | | 24 |
| 2 | 40° C | Notes 2 & 8 | Note 32 | Note 3 | III-17 | 25 |
| 2 | | | | | III-17 | 26 |
| 2 | | | | | III-17 | 27 |
| 2 | | | | Notes 3 & 4 | III-17 | 28 |
| 2 | | | | | III-17 | 29 |
| 2 | | | | | III-17 | 30 |
| 2 | | | | | III-17 | 31 |
| 2 | | | | | III-17 | 32 |
| | | | | | III-17 | 33 |
| | | | | | | 34 |
| | | | | | | 35 |
| 0.1 | 40° C | Note 8 | Notes 19 & 29 | none | III-18 | 36 |
| 0.1 | | | | | III-18 | 37 |
| | | | | | | 38 |
| | | | | | | 39 |
| | | | | | | 40 |
| 0.1 | 40° C | Note 8 | Notes 21 & 29 | none | III-18 | 41 |
| | | | | | | 42 |
| | | | | | | 43 |
| 0.25 | 30° C | Notes 1 & 9 | Note 29 | Note 10 | III-18 | 44 |
| | | | | | | 45 |
| | | | | | | 46 |
| 60 | Note 17 | | | Note 11 | III-19 | 47 |
| | | | | | | 48 |
| | | | | | | 49 |
| | | | | | | 50 |

DEPOSITED CARBON RESISTORS - FAMILY CODES

| Line No. | CODE NO. | RESISTANCE RANGE | TOLERANCE |
|----------|----------|-------------------------|-----------------|
| 1 | 153A | 10 ohms to 1 meg. | ±5% |
| 2 | | | |
| 3 | | | |
| 4 | 154A | 40 ohms to 10 meg. | ±5% |
| 5 | | | |
| 6 | | | |
| 7 | 206A | 200 ohms to 5.11 meg. | ±5% |
| 8 | | | |
| 9 | | | |
| 10 | 207A | 0.015 meg. to 5.11 meg. | ±0%, -2% |
| 11 | | | |
| 12 | | | |
| 13 | 208A | 5 ohms to 12000 ohms | ±0.5% |
| 14 | | Note 23 | Note 24 |
| 15 | | | |
| 16 | | | |
| 17 | 209A | 20.0 ohms to 1300 ohms | ±(0.5 +0.001R)% |
| 18 | | Note 25 | Note 26 |
| 19 | | | |
| 20 | | | |
| 21 | 221A | 1.0 ohm to 2.1 meg. | ±(1% +0.01 ohm) |
| 22 | | | |
| 23 | 221B | 511 ohms and 20000 ohms | ±2% |
| 24 | | | |
| 25 | 222A | 5.11 ohms to 10000 ohms | Note 13 |
| 26 | | | |
| 27 | | | |
| 28 | | | |
| 29 | 223A | 4.99 ohms to 25200 ohms | ±1% |
| 30 | | | |
| 31 | 223B | | Note 13 |
| 32 | | | |
| 33 | | | |
| 34 | 237A | 1.0 ohms to 261000 ohms | ±(1% +0.01 ohm) |
| 35 | | | |
| 36 | | | |
| 37 | 238A | 1.0 ohms to 261000 ohms | ±(1% +0.01 ohm) |
| 38 | | | |
| 39 | | | |
| 40 | 6145C | 1.0 ohm to 5.0 meg. | ±5% |
| 41 | | | |
| 42 | | | |
| 43 | | | |
| 44 | | | |
| 45 | | | |
| 46 | | | |
| 47 | | | |
| 48 | | | |
| 49 | | | |
| 50 | | | |

DEPOSITED CARBON RESISTORS - FAMILY CODES'

| RATING WATTS | AMBIENT TEMP. | DERATING | CHARACTER- ISTICS | FINISH OR COVER | ILLUS- TRATION | Line No. |
|------------------|------------------|----------------|----------------------|-----------------------|-------------------|-------------|
| 300 | Note 17 | | | Note 11 | III-19 | 1 |
| | | | | | | 2 |
| 600 | Note 17 | | | Note 11 | III-19 | 3 |
| | | | | | | 4 |
| | | | | | | 5 |
| | | | | | | 6 |
| 3.5 | Notes 17 & 18 | | Notes 14 & 30 | Note 11 | III-19 | 7 |
| | | | | | | 8 |
| | | | | | | 9 |
| 2.0 | 30° C | Note 12 | Note 33 | Note 11 | III-20 | 10 |
| | | | | | | 11 |
| | | | | | | 12 |
| 0.01 | 40° C | Note 8 | Note 29 | none | III-20 | 13 |
| | | | | | | 14 |
| | | | | | | 15 |
| | | | | | | 16 |
| 0.01 | 40° C | Note 8 | Note 29 | none | III-20 | 17 |
| | | | | | | 18 |
| | | | | | | 19 |
| | | | | | | 20 |
| 0.5 | 40° C | Notes 6 & 8 | Notes 15 & 28 | Note 4 | III-17 | 21 |
| | | | | | | 22 |
| 0.5 | 40° C | Notes 6 & 8 | Notes 15 & 28 | Note 4 | III-17 | 23 |
| | | | | | | 24 |
| 0.25 | 40° C | Notes 5 & 8 | Notes 16 & 31 | Note 11 | III-21 | 25 |
| | | | | | | 26 |
| | | | | | | 27 |
| | | | | | | 28 |
| 0.5 | 40° C | Notes 6 & 8 | Notes 15 & 28 | Lacquer | III-17 | 29 |
| | | | | | | 30 |
| 0.5 | | | | | III-17 | 31 |
| | | | | | | 32 |
| | | | | | | 33 |
| 0.125 Note 37 | 70° C | Note 34 | Notes 35 & 36 | Note 4 | III-17 | 34 |
| | | | | | | 35 |
| | | | | | | 36 |
| 0.25 Note 37 | 70° C | Note 38 | Notes 36 & 39 | Note 39 | III-17 | 37 |
| | | | | | | 38 |
| | | | | | | 39 |
| 0.5 | 30° C | Notes 1 & 5 | Note 41 | Note 4 | III-15 | 40 |
| | | | | | | 41 |
| | | | | | | 42 |
| | | | | | | 43 |
| | | | | | | 44 |
| | | | | | | 45 |
| | | | | | | 46 |
| | | | | | | 47 |
| | | | | | | 48 |
| | | | | | | 49 |
| | | | | | | 50 |

DEPOSITED CARBON RESISTORS - FAMILY CODES

NOTES:

1. For each degree that the ambient exceeds 30° C the power rating decreases about 1%.
2. While under rated power load, the resistor decreases about 2-1/2 per cent in resistance value.
3. Baked enamel.
4. Insulating sleeve.
5. While under rated power load, the resistor decreases about 2% in resistance value.
6. While under rated power load, the resistor decreases about 3% in resistance value.
7. Ceramic shell - hermetically sealed.
8. For each degree that the ambient exceeds 40° C the power rating decreases 1-1/4%.
9. While under rated power load, the resistor decreases about 1-1/4 per cent in resistance value.
10. Varnish finish - requires special packing for shipment.
11. Enclosed in a glass envelope containing an inert gas at approximately 1/3 atmospheric pressure.
12. For each degree that the ambient exceeds 30° C the power rating decreases about 0.5%.
13. When less than 5 resistors are ordered, the tolerance is ±1%.
When ordered in quantity, the resistors are furnished in groups of 5, the ±1% tolerance range is divided into 3 cells as follows:

| | <u>Upper Limit</u> | <u>Lower Limit</u> | <u>Resistors* Per Cell</u> |
|-------------|--------------------|--------------------|--------------------------------|
| Upper Cell | 1.0% | 0.30% | 1 |
| Center Cell | 0.35% | - 0.35% | 3 |
| Lower Cell | - 0.30% | - 1.00% | 1 |

*At manufacturers discretion, all 5 may be in the center cell.

NOTE: Resistors in the range of +0.35% to +0.30% are considered to be either in the upper or center cell. Resistors in the range of -0.30% to - 0.35% are considered to be either in the lower or center cell.

14. Max. voltage 700 volts DC or RMS 60 cycle.
15. Max. voltage 350 volts DC or RMS 60 cycle.

DEPOSITED CARBON RESISTORS - FAMILY CODES

NOTES:

16. Max. voltage 300 volts DC or RMS 60 cycles.
17. Free air convection at 40° C.
18. For each degree that the ambient exceeds 40° C the power rating decreases about 0.6%.
19. The 149A and 149B resistors differ in that the resistance values and tolerance requirements apply when the 149A is measured in a No. 9A Attenuator, or equivalent, and the 149B is measured in a KS-9534L2 Attenuator, or equivalent.
20. Resistance values available and corresponding tolerances are shown in the following table:

| Resistance-Ohms | | Steps | Tolerance |
|-----------------|----------|-------|--|
| Range | | | |
| 0.300 to | 19.999 | 0.001 | +(0.75% +0.002 ohm) -(1.00% +0.002 ohm) |
| 20.000 to | 99.990 | 0.01 | +0.75% -1.00% |
| 100.000 to | 300.000 | 0.1 | +0.75% -1.00% |
| 300.100 to | 1000.000 | 0.1 | +0.0025 R% * -0.0033 R% * |

* R is the nominal resistance value of the resistor in ohms.

21. The 150A resistor is intended to be assembled with a 149A resistor at its center point.
22. Resistance values available and corresponding tolerances are shown in the following table:

| Resistance-Ohms | | Steps | Tolerance |
|-------------------|---------|-------|--------------------|
| Range | | | |
| Zero (metal core) | | --- | +0.002 ohm max. |
| 1.000 to | 19.999 | 0.001 | +(0.5% +0.002 ohm) |
| 20.000 to | 100.000 | 0.01 | +(0.5% +0.002 ohm) |

23. Zero nominal resistance value is provided by use of a metal rod in place of the resistor unit. The resistance in this case is specified as 0.002 ohm max.
24. The nominal resistance values are provided to any desired tolerance but not smaller than ±0.5%.
25. Infinite resistance value is provided by omitting the carbon coating and the electrodes from the ceramic disc. The resistance in this case is specified as "Infinite".
26. The nominal resistance values are provided to any desired tolerance but not smaller than +(0.5% +0.001R)%. R is the nominal resistance value of the resistor in ohms.
27. -520 (Max. Temperature Coefficient of Resistance PPM/°C).
28. -500 (Max. Temperature Coefficient of Resistance PPM/°C).
29. -450 (Max. Temperature Coefficient of Resistance PPM/°C).


DEPOSITED CARBON RESISTORS - FAMILY CODES

- 30. -390 (Max. Temperature Coefficient of Resistance PPM/°C).
- 31. -300 (Max. Temperature Coefficient of Resistance PPM/°C).
- 32. Maximum temperature coefficient of resistance versus resistance range is as follows:


| Resistance Range | Temperature Coefficient PPM/°C |
|-------------------------|-----------------------------------|
| 50.0 ohms to 1.0 meg. | -450 |
| 1.01 meg. to 10.0 meg. | -495 |
| 10.10 meg. to 30.0 meg. | -540 |
| 30.10 meg. to 50.0 meg. | -800 |

- 33. Temperature coefficient of resistance is maximum -370 PPM/°C, minimum -270 PPM/°C.
- 34. For each degree that the ambient temperature exceeds 70°C, the power decreases approximately 1-1/4%.
- 35. Intended for general use where they will not be subjected to relative humidity in excess of 60% for prolonged periods.
- 36. Has a negative temperature coefficient of resistance of 0.03% per °C.
- 37. When operated within this wattage and temperature rating, these resistors are not expected to change downward by more than 2% nor upward by more than 4% in resistance value.
- 38. When operated in ambient temperatures above 70°C, the power rating is derated linearly to 0.125 watt at 125°C and to zero power at 150°C.
- 39. Intended for general use where humid conditions may be encountered. Encased in a moisture resistant epoxy shell.
- 40. When operated in ambient temperatures above 70°C, the power rating is reduced linearly to zero at 150°C.
- 41. This resistor consists of a pair of 145C resistors, each having the same nominal resistance value and matched to that resistance value to within 1 per cent at 75°±5° F.

DEPOSITED CARBON RESISTORS - FAMILY CODES

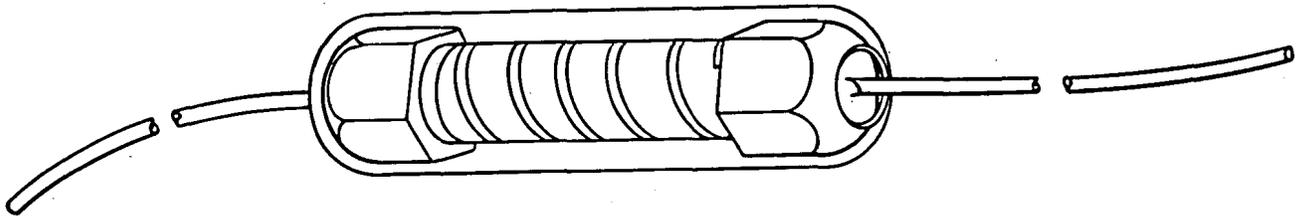

| CODE NO. | DIMENSIONS - INCHES | | | |
|-------------|---------------------|----------|--------|----------|
| | BODY | | LEADS | |
| | LENGTH | DIAMETER | LENGTH | DIAMETER |
| 144E, F, G | 1-1/32 | 23/64 | 2 | .032 |
| 145 | 7/8 | 13/64 | 1-1/2 | .032 |
| 147D, E, F | 2-1/8 | 23/64 | 2 | .032 |
| 221 | 5/8 | 7/32 | 1-1/2 | .032 |
| 237A | .390 | 1/8 | 1-1/2 | .025 |
| 238A | .406 | .145 | 1-1/2 | .025 |

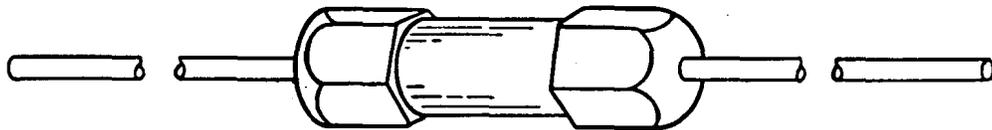


| CODE NO. | DIMENSIONS - INCHES | | | |
|-------------|---------------------|----------|--------|----------|
| | BODY | | LEADS | |
| | LENGTH | DIAMETER | LENGTH | DIAMETER |
| 144A, B, C | 1 | 9/32 | 2 | .032 |
| 147A, B, C | 2-1/16 | 9/32 | 2 | .032 |
| 223 | 37/64 | 11/64 | 1-1/2 | .032 |
| 239A | .342 | .094 | 1-1/2 | .025 |

DEPOSITED CARBON RESISTORS - FAMILY CODES




Body Length 1 inch; Body Diameter $\frac{9}{32}$ inch; Lead Length $1-\frac{25}{64}$ inch; Lead Diameter 0.020 inch

146-Type Resistors

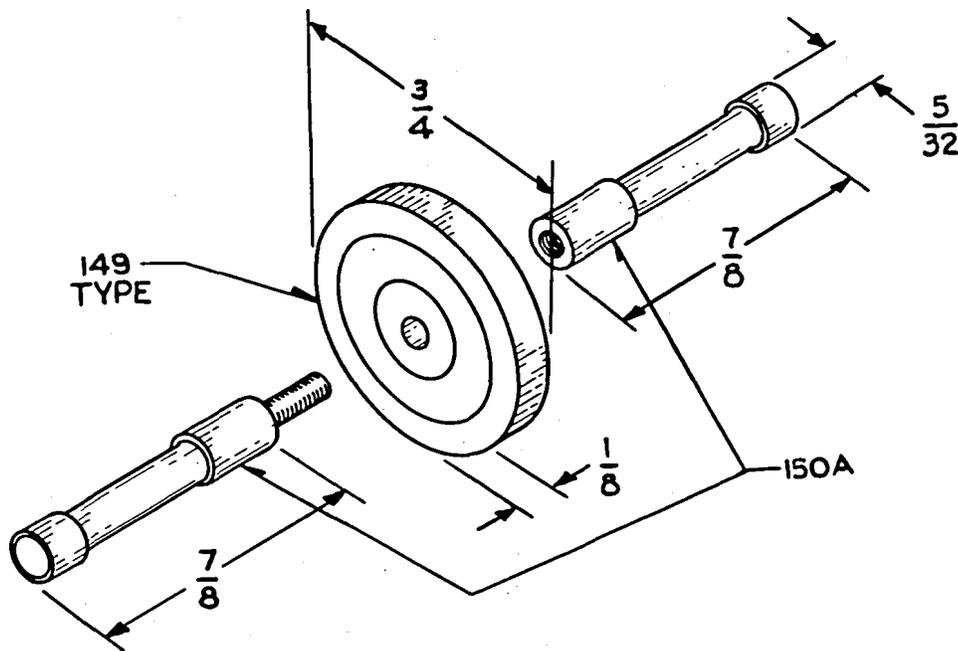


149- & 150-Type Resistors




Body Length $1\frac{7}{32}$ inch; Body Diameter $\frac{5}{64}$ inch; Lead Length $1-\frac{7}{16}$ inch; Lead Diameter 0.0159 inch

151-Type Resistors

DEPOSITED CARBON RESISTORS - FAMILY CODES

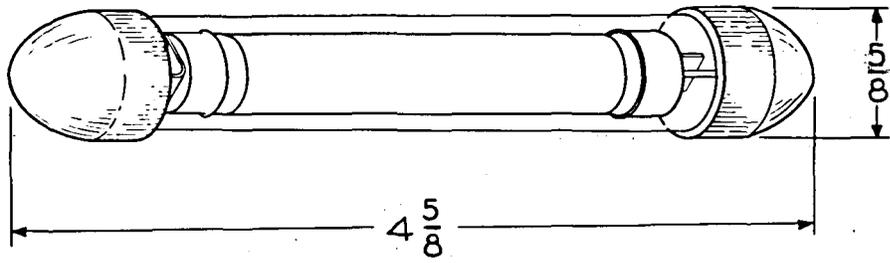


152-Type Resistors

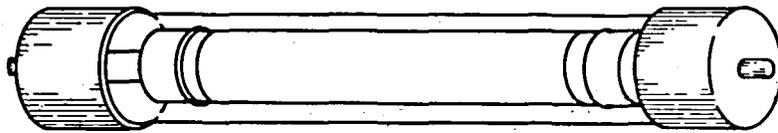

153- & 154-Type Resistors


| CODE NO. | BODY LENGTH | BODY DIAMETER |
|----------|--------------------|-------------------|
| 153A | $8 - \frac{7}{8}$ | $1 - \frac{1}{4}$ |
| 154A | $14 - \frac{7}{8}$ | $1 - \frac{1}{4}$ |

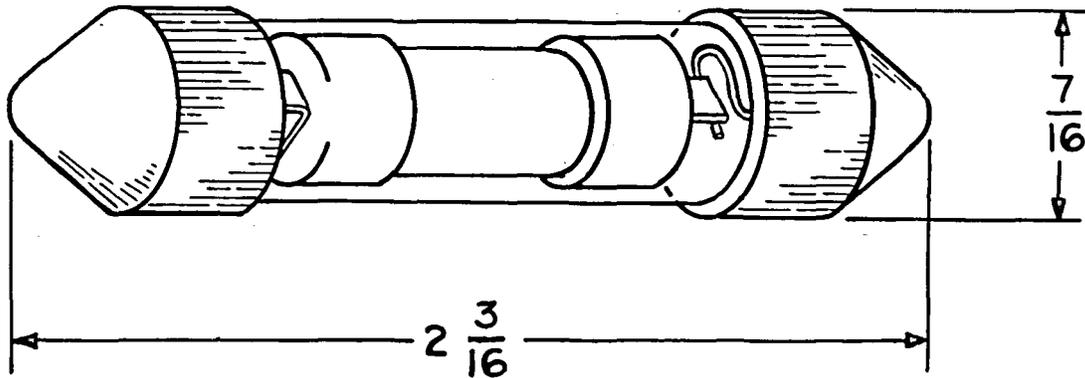

206-Type Resistors


Suitable Mounting: Littlefuse 125004
Fuse Clip

DEPOSITED CARBON RESISTORS - FAMILY CODES

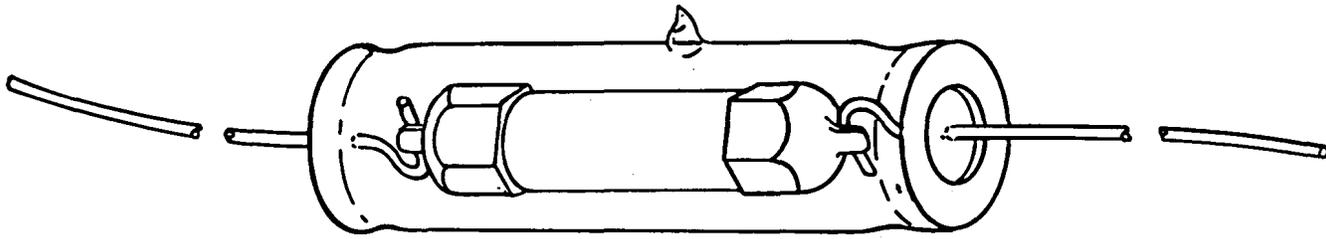


Body Length $1\text{-}\frac{7}{8}$ inch; Body Diameter $\frac{25}{64}$ inch; Lead Length $1\text{-}\frac{1}{2}$ inch; Lead Diameter 0.032 inch

207-Type Resistors

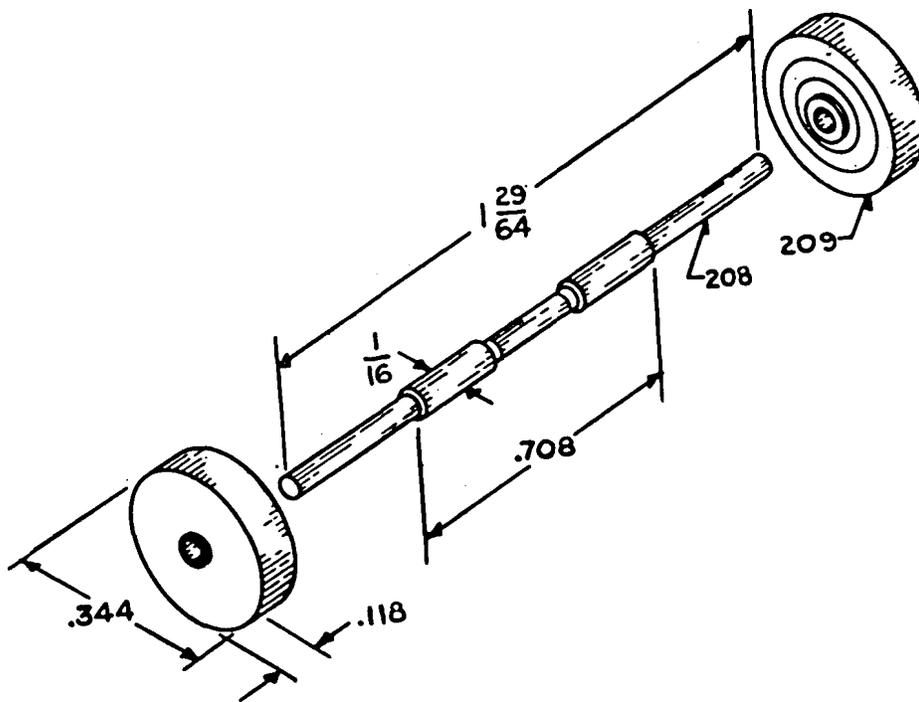

208- & 209-Type Resistors

DEPOSITED CARBON RESISTORS - FAMILY CODES

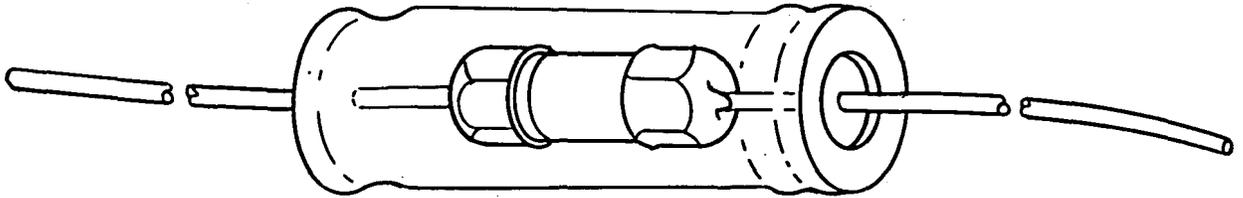

Body Length $7/8$ inch; Body Diameter $9/32$ inch; Lead Length
 $1-1/2$ inch; Lead Diameter 0.020 inch

222-Type Resistors

DEPOSITED CARBON RESISTORS - 218-TYPE RESISTOR

DESCRIPTION


The 218-type resistor consists of a ceramic core having a coating of deposited carbon, and an electrode at each end. One end of the resistor unit is assembled in a ferrule arranged for mounting in the wall of a wave guide.

The resistor is capable of dissipating 0.5 watt. Where the resistor tolerance is less than 3%, allowance should be made for change in resistance due to application of load to the resistor, due to the temperature coefficient of maximum $-450 \text{ PPM}/^{\circ}\text{C}$, average $-300 \text{ PPM}/^{\circ}\text{C}$.

Overall dimensions are $1-1/8$ " long by $1/4$ " diameter. The diameter of the portion of the ferrule which enters the mounting hole is $0.145" +.000 - .002$ ".

They are used in the TH Radio System, and in these applications the power dissipation is approximately 0.1 watt.

| <u>CODE NO.</u> | <u>RESISTANCE OHMS</u> | <u>TOLERANCE %</u> |
|---------------------|----------------------------|------------------------|
| 218A | 100 | 1 |
| 218B | 157 | 2 |
| 218C | 100 | 3 |

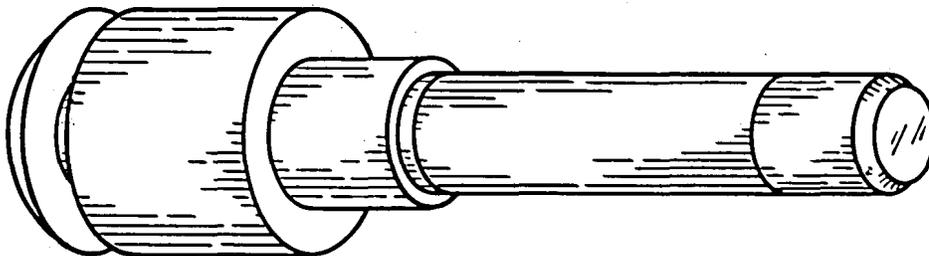

DESCRIPTION


The 226A resistor consists of a pair of 221A resistors, 75 ohms each matched so that the final resistance values do not differ from each other by more than 0.5% (or 0.37 ohm) when measured at 25° C. The maximum differences in temperature coefficients of resistance is 100 PPM/°C, and the maximum temperature coefficient of resistance is -500 PPM/°C.

Each component resistor has body dimensions (including insulating tube) of 5/8 inch long by 7/32 inch diameter and has two axial leads each 1-1/2 inch long and 0.026 inch in diameter.

Each 226A resistor is packaged as a single pair of resistors when furnished to the customer. Each component of the pair is stamped with the code marking "226A", instead of 221A, and the resistance marking is 75.

The maximum power rating is 0.10 watt, or 0.05 watt for each component of the pair.

It is used in the 489A network in the TA Radio System.

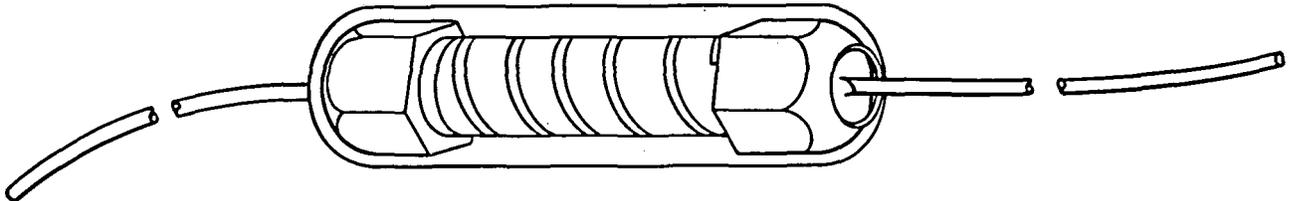

DESCRIPTION


These resistors consist of a tantalum film on a ceramic substrate with co-planar leads of 0.025 inch diameter tinned copper wire.

They are capable of dissapating 0.125 watt at 70° C and are de-rated to zero power at 125° C. The temperature coefficient of resistance is -100 ± 50 PPM/°C.

The resistors are available in a resistance range of 100 ohms to 0.1 meg.

Available in standard resistance values listed in these columns of STANDARD RESISTANCE VALUES, Table 1

| <u>Code</u> | <u>Tolerance</u> | <u>Table 1</u> |
|-------------|------------------|----------------|
| 254A | $\pm 1\%$ | $\pm 2\%$ |
| 254C | $\pm 5\%$ | $\pm 10\%$ |
| 254J | $\pm 3\%$ | $\pm 5\%$ |

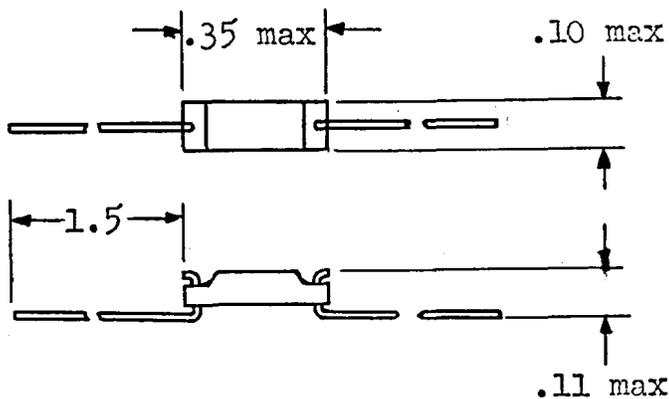


DESCRIPTION

These resistors are precision wire wound resistors having extremely low parasitics of inductance.

They consist of a bifilar loop of resistance wire of appropriate length, wound on a glass bonded mica winding form with axial leads at each end.

| Code No. | DC Resistance - Ohms | | | Inductance - UH | |
|----------|----------------------|-------|-------|-----------------|-------|
| | Max | Nom | Min | Max | Min |
| 246B | 1.917 | 1.870 | 1.823 | 0.055 | 0.045 |
| 246C | 2.501 | 2.440 | 2.379 | 0.060 | 0.050 |
| 246A | 3.207 | 3.191 | 3.175 | 0.065 | 0.055 |
| 246D | 4.649 | 4.580 | 4.511 | 0.060 | 0.050 |

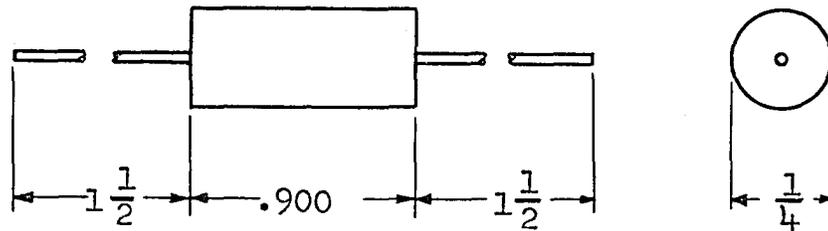

**IV ALL TYPES PER
KS SPECIFICATION**

**IV ALL TYPES PER
KS SPECIFICATION**

GENERAL

The KS- specification resistors listed are those having the most general use. Other KS- specification resistors are not included because of their very special use or because they are approaching obsolescence.

For some resistors, the maximum voltage which may be applied across the terminals of the resistor is specified. A term associated with this requirement is "Critical Resistance Value". This is defined as the value of resistance for which the voltage required to produce rated power dissipation in the resistor is equal to the maximum voltage rating. Below the critical resistance value the wattage rating limits the applied voltage and above the critical resistance value the maximum voltage rating limits the power dissipation. Where the critical resistance value is beyond the range of available resistance values, the maximum voltage the resistor could withstand is not specified.

Temperature coefficient of resistance information is furnished in notes to which reference is made in the tables under the heading of "Characteristics". In adjustable resistors, good contact must be made between the adjusting device and the winding for the temperature coefficient of the resistor to be dependable. The notes indicate whether the requirement is contained in the specification for the resistor or the specification used for the material used in its construction by calling the requirement "resistor requirement" or "material requirement", respectively.

KS - SPECIFICATION RESISTORS - WIRE WOUND

| Line No. | KS- NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | DERATED TO | |
|----------|-------------------|-----------------------|---------------------|----------------|-------------------|---------------------|
| | | | | | AMBIENT TEMP. | ZERO WATTS AT TEMP. |
| 1 | * 8441 | 1 - 620 | ±5%, 10% | 1/2 | 104° F | 230° F * |
| 2 | * 8451 | 1 - 3000 | ±5%, 10% | 1 | 104° F | 230° F * |
| 3 | * 8452 | 1 - 4700 | ±5%, 10% | 2 | 104° F | 230° F * |
| 4 | | | | | | |
| 5 | 8512 | 1 - 150000 | A ±5% | 4-215 | 120° F | 670° F |
| 6 | | Note 3 | B ±2% | Notes 1 | | |
| 7 | | | C ±1% | 2 & 3. | | |
| 8 | | | D ±10% | | | |
| 9 | | | E ±3% | | | |
| 10 | | | F ±.5% | | | |
| 11 | | | G ±.25% | | | |
| 12 | | | | | | |
| 13 | 9913 | 1.4 - 2160 | ±10% | 28 | 120° F | 670° F |
| 14 | | | | Notes 1 | | |
| 15 | | | | & 4 | | |
| 16 | | | | | | |
| 17 | 9914 | 4.5 - 7140 | ±10% | 75 | 120° F | 670° F |
| 18 | | | | Notes 1 | | |
| 19 | | | | & 4 | | |
| 20 | | | | | | |
| 21 | 13192L1 | 1 - 150000 | A ±1% | 0.5 | 150° F | 220° F |
| 22 | 13192L2 | 1 - 150000 | B ±.25% | 0.5 | | |
| 23 | 13192L3 | 1 - 400000 | D ±.5% | 0.75 | | |
| 24 | 13192L4 | 1 - 400000 | | 0.75 | | |
| 25 | 13192L5 | 1 - 1,000,000 | | 1.0 | | |
| 26 | 13192L6 | 1 - 1,000,000 | | 1.0 | | |
| 27 | | | | | | |
| 28 | 13609L1 | 2.0 - 71000 | Below 1 | 140 | 120° F | 670° F |
| 29 | 13609L2 | 0.1 - 63000 | ohm ±10% | 116 | | |
| 30 | 13609L3 | 0.1 - 50000 | & | 86 | | |
| 31 | 13609L4 | 0.1 - 25000 | 1 ohm & | 50 | | |
| 32 | 13609L5 | 0.1 - 16000 | above ±5% | 40 | | |
| 33 | 13609L6 | 0.1 - 6300 | | 20 | | |
| 34 | 13609L7 | 0.1 - 4000 | | 14 | | |
| 35 | | | | Note 1 | | |
| 36 | | | | | | |
| 37 | 13653 | 1 - 1100 | ±10% | 15 | 120° F | 670° F |
| 38 | | | | Notes 1 | | |
| 39 | | | | & 4 | | |
| 40 | | | | | | |
| 41 | 13657L1 | 1 - 1200 | A ±5% | 10 | 120° F | 670° F |
| 42 | 13657L2 | 1 - 1600 | B ±2% | 11 | | |
| 43 | 13657L3 | 2 - 4000 | C ±1% | 40 | | |
| 44 | 13657L4 | 1 - 750 | D ±10% | 8 | | |
| 45 | | | E ±3% | Note 1 | | |
| 46 | | | | | | |
| 47 | 13809L1 | 3.5 - 6.0 meg. | ±.5% | 3.5-6.0 | 185° F | -- |
| 48 | 13809L2 | 1.0 - 3.5 meg. | | 1.0-3.5 | | |
| 49 | 13809L3 | 0.5 - 1.0 meg. | | 0.5-1.0 | | |
| 50 | | Note 5 | | Note 5 | | |

* MANUFACTURE DISCONTINUED

KS - SPECIFICATION RESISTORS - WIRE WOUND

| BODY DIMENSIONS- DIAMETER | INCHES LENGTH | CHARACTER- ISTICS | BODY MATERIAL | ILLUS- TRATION | Line No. |
|------------------------------|--------------------|-----------------------------|------------------------------|-------------------|----------------|
| * 7/32 | 11/16 | Not recommended | Fiber core and | IV-25 | 1 * |
| * 9/32 | 1-5/16 | for high stabil- | molded in Plastic | IV-25 | 2 * |
| * 11/32 | 1-13/16 | ity applications | compound | IV-25 | 3 * |
| | | Notes 12 & 15 | | | 4 |
| 15/32 | 1 min. | Note 9 | Ceramic core and | IV-25 | 5 |
| 1-5/16 | 11-3/4 max. | | vitreous enamel | | 6 |
| | | | insulation | | 7 |
| | | | | | 8 |
| | | | | | 9 |
| | | | | | 10 |
| | | | | | 11 |
| | | | | | 12 |
| 29/32 | 2-5/16 | Adjustable | Ceramic core and | IV-27 | 13 |
| | | Note 9 | vitreous enamel | | 14 |
| | | | insulation | | 15 |
| | | | | | 16 |
| 1-5/16 | 4-1/4 | Adjustable | Ceramic core and | IV-27 | 17 |
| | | Note 9 | vitreous enamel | | 18 |
| | | | insulation | | 19 |
| | | | | | 20 |
| 19/32 | 19/32 | Non-inductive | Ceramic core, Acetate | IV-27 | 21 |
| 19/32 | 19/32 | winding, low | film or cloth-backed | IV-27 | 22 |
| 19/32 | 1-1/32 | time constant | Scotch Tape insula- | IV-27 | 23 |
| 19/32 | 1-1/32 | requirement | tion and varnish or | IV-27 | 24 |
| 25/32 | 1-9/32 | Note 13 | lacquer impregnation | IV-27 | 25 |
| 25/32 | 1-9/32 | | | IV-27 | 26 |
| | | | | | 27 |
| 1-5/16 | 11-7/16 | Notes 14 & | Ceramic core, Vitre- | IV-28 | 28 |
| 1-5/16 | 9-5/8 | 16 | ous enamel insula- | IV-28 | 29 |
| 1-5/16 | 7-7/16 | | tion and ferrule | IV-28 | 30 |
| 1-1/16 | 5-1/8 | | terminals | IV-28 | 31 |
| 1-1/16 | 4-7/16 | | | IV-28 | 32 |
| 3/4 | 2-15/16 | | | IV-28 | 33 |
| 3/4 | 2-3/8 | | | IV-28 | 34 |
| | | | | | 35 |
| | | | | | 36 |
| 19/32 | 2 | Adjustable | Ceramic core and | IV-27 | 37 |
| | | Note 9 | vitreous enamel | | 38 |
| | | | insulation | | 39 |
| | | | | | 40 |
| 1/2 | 1-3/4 | Non-inductive | Ceramic core and | IV-28 | 41 |
| 1/2 | 2 | winding (Ayrton | vitreous enamel | IV-28 | 42 |
| 7/8 | 3-1/2 | Perry) | insulation | IV-28 | 43 |
| 1/2 | 1-3/8 | Note 10 | | IV-28 | 44 |
| | | | | | 45 |
| | | | | | 46 |
| 1-13/32 | 9-25/32 | High Voltage | Glazed ceramic and | IV-28 | 47 |
| 1-13/32 | 5-9/32 | Notes 6 & 8 | ferrule terminals | IV-28 | 48 |
| 1-5/64 | 2-15/16 | | | IV-28 | 49 |
| | | | | | 50 |

* MANUFACTURE DISCONTINUED

KS-8512 RESISTORS

| Line No. | LIST NO. | RATING WATTS | BODY DIMENSIONS-INCHES | | RESISTANCE RANGE OHMS | |
|----------|----------|--------------|------------------------|--------|-----------------------|----------|
| | | | DIAMETER | LENGTH | | |
| 1 | 1 | 4 | 15/32 | 1 | 1.7 | - 1500 |
| 2 | 2 | 8 | 15/32 | 1-1/2 | 1.7 | - 3500 |
| 3 | 3 | 10 | 15/32 | 1-3/4 | 1.7 | - 4400 |
| 4 | 4 | 8 | 19/32 | 1 | 1.7 | - 2100 |
| 5 | 5 | 10 | 19/32 | 1-1/2 | 1.7 | - 4900 |
| 6 | 6 | 15 | 19/32 | 2 | 1.7 | - 7600 |
| 7 | 50 | 20 | 19/32 | 3 | 2.5 | - 13100 |
| 8 | 7 | 12 | 23/32 | 1-3/8 | 1.7 | - 5300 |
| 9 | 8 | 20 | 23/32 | 2 | 1.7 | - 9800 |
| 10 | 9 | 24 | 23/32 | 2-1/2 | 2.1 | - 13400 |
| 11 | 10 | 30 | 23/32 | 3-1/8 | 2.6 | - 17800 |
| 12 | 11 | 32 | 23/32 | 3-1/2 | 3.0 | - 20500 |
| 13 | 51 | 35 | 23/32 | 4 | 3.5 | - 24100 |
| 14 | 12 | 35 | 23/32 | 4-1/8 | 3.6 | - 25000 |
| 15 | 13 | 40 | 23/32 | 4-1/2 | 3.9 | - 27800 |
| 16 | 14 | 45 | 23/32 | 5 | 4.6 | - 31200 |
| 17 | 15 | 50 | 23/32 | 5-1/2 | 5.1 | - 34800 |
| 18 | 16 | 55 | 23/32 | 6 | 6.4 | - 38400 |
| 19 | 17 | 23 | 25/32 | 2 | 1.7 | - 10000 |
| 20 | 18 | 15 | 29/32 | 1-9/16 | 1.7 | - 7100 |
| 21 | 19 | 25 | 29/32 | 2 | 1.8 | - 11300 |
| 22 | 20 | 28 | 29/32 | 2-5/16 | 2.3 | - 14300 |
| 23 | 21 | 35 | 29/32 | 3 | 3.3 | - 20800 |
| 24 | 22 | 40 | 29/32 | 3-1/2 | 3.9 | - 25600 |
| 25 | 23 | 45 | 29/32 | 4 | 4.8 | - 30300 |
| 26 | 24 | 50 | 29/32 | 4-1/2 | 5.4 | - 35100 |
| 27 | 25 | 55 | 29/32 | 4-3/4 | 5.7 | - 36650 |
| 28 | 26 | 60 | 29/32 | 5 | 6.0 | - 39300 |
| 29 | 27 | 65 | 29/32 | 5-5/8 | 7.0 | - 45700 |
| 30 | 28 | 70 | 29/32 | 6 | 7.5 | - 49000 |
| 31 | 29 | 80 | 29/32 | 6-1/2 | 8.2 | - 54100 |
| 32 | 30 | 90 | 29/32 | 7-1/4 | 9.9 | - 61200 |
| 33 | 31 | 40 | 1-1/8 | 3 | 4.1 | - 24000 |
| 34 | 32 | 60 | 1-1/8 | 4 | 5.9 | - 35000 |
| 35 | 33 | 75 | 1-1/8 | 5 | 7.5 | - 47000 |
| 36 | 34 | 90 | 1-1/8 | 6 | 9.3 | - 60000 |
| 37 | 35 | 112 | 1-1/8 | 7-1/2 | 11.9 | - 77000 |
| 38 | 36 | 120 | 1-1/8 | 8 | 12.9 | - 83000 |
| 39 | 37 | 150 | 1-1/8 | 10 | 16.3 | - 107000 |
| 40 | 38 | 33 | 1-5/16 | 2 | 2.6 | - 14000 |
| 41 | 39 | 75 | 1-5/16 | 4-1/4 | 7.3 | - 42000 |
| 42 | 40 | 110 | 1-5/16 | 6-1/8 | 11.3 | - 73000 |
| 43 | 41 | 115 | 1-5/16 | 6-1/2 | 12.2 | - 79000 |
| 44 | 42 | 160 | 1-5/16 | 8-1/2 | 16.3 | - 107000 |
| 45 | 43 | 200 | 1-5/16 | 10-1/2 | 20.7 | - 136000 |

KS-8512 RESISTORS

| Line No. | LIST NO. | RATING WATTS | BODY DIMENSIONS-INCHES | | RESISTANCE RANGE OHMS |
|----------|----------|--------------|--|---------|-----------------------|
| | | | DIAMETER | LENGTH | |
| 1 | 44 | 215 | 1-5/16 | 11-3/4 | 23.4 - 153000 |
| 2 | 45 | 30 | 1-1/8 | 4 | 2.5 - 16200 |
| 3 | 46 | 60 | 1-1/8 | 5-1/4 | 4.9 - 32400 |
| 4 | 47 | 125 | 1-3/16 | 8 | 11.6 - 78000 |
| 5 | 48 | 160 | 1-1/4 | 10-5/32 | 17.3 - 111000 |
| 6 | 49 | 100 | 1-11/16 | 5-11/16 | 8.0 - 68600 |
| 7 | 50 | | (Shown in table between Lists 6 and 7) | | |
| 8 | 51 | | (Shown in table between Lists 11 and 12) | | |
| 9 | 52 | 40 | 1-3/16 | 3 | 4.1 - 24000 |
| 10 | 53 | 60 | 1-3/16 | 4 | 5.9 - 35000 |
| 11 | 54 | 75 | 1-3/16 | 5 | 7.5 - 47000 |
| 12 | 55 | 90 | 1-3/16 | 6 | 9.3 - 60000 |
| 13 | 56 | 112 | 1-3/16 | 7-1/2 | 11.9 - 77000 |
| 14 | 57 | 120 | 1-3/16 | 8 | 12.9 - 83000 |
| 15 | 58 | 150 | 1-3/16 | 10 | 16.3 - 107000 |
| 16 | 59 | 33 | 1-5/16 | 2 | 2.6 - 14000 |
| 17 | 60 | 75 | 1-5/16 | 4-1/4 | 7.3 - 42000 |
| 18 | 61 | 110 | 1-5/16 | 6-1/8 | 11.3 - 73000 |
| 19 | 62 | 115 | 1-5/16 | 6-1/2 | 12.2 - 79000 |
| 20 | 63 | 160 | 1-5/16 | 8-1/2 | 16.3 - 107000 |
| 21 | 64 | 200 | 1-5/16 | 10-1/2 | 20.7 - 136000 |
| 22 | 65 | 215 | 1-5/16 | 11-3/4 | 23.4 - 153000 |

LISTS 52 to 65 are replacements for Lists 31 to 44.
DO NOT USE in new applications.

KS- SPECIFICATION RESISTORS - WIRE WOUND

| Line No. | KS- NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | AMBIENT TEMP. | DERATED TO ZERO WATTS AT TEMP. |
|----------|------------|-----------------------|-------------------------------------|--------------|---------------|--------------------------------|
| 1 | 14175L1 | 0.21 - 6300 | A ±5% | 20 | 120° F | 670° F |
| 2 | 14175L2 | 0.23 - 14000 | B ±2% | 27 | | |
| 3 | 14175L3 | 0.37 - 30000 | C ±1% | 39 | | |
| 4 | 14175L4 | 0.52 - 43000 | D ±10% | 50 | | |
| 5 | 14175L5 | 0.71 - 56000 | | 70 | | |
| 6 | 14175L6 | 0.10 - 5900 | | 16 | | |
| 7 | | | | Note 1 | | |
| 8 | | | | | | |
| 9 | 14272L1 | 1 - 1330 | ±10% | 25 | 120° F | 670° F |
| 10 | 14272L2 | 1 - 615 | | 10 | | |
| 11 | | | | Notes 1 & 4 | | |
| 12 | | | | | | |
| 13 | | | | | | |
| 14 | 14603L1 | 1 - 2430 | A ±5% | 5 | 120° F | 670° F |
| 15 | 14603L2 | 1 - 7960 | B ±2% | 10 | | |
| 16 | 14603L3 | 1 - 909 | C ±1% | 3 | | |
| 17 | 14603L4 | 1 - 2430 | D ±10% | 5 | | |
| 18 | 14603L5 | 1 - 7960 | E ±3% | 10 | | |
| 19 | 14603L6 | 1 - 909 | F ±.5% | 3 | | |
| 20 | | | G ±.25 | Note 1 | | |
| 21 | | | | | | |
| 22 | 16703L1 | 250 | ±5% | 125 | 120° F | 670° F |
| 23 | 16703L2 | 169 | ±5% | Note 1 | | |
| 24 | 16703L3 | 25 | ±5% | | | |
| 25 | 16703L4 | 50 | ±5% | | | |
| 26 | | | | | | |
| 27 | 16122 | 3500 | ±5% | 125 | 120° F | 670° F |
| 28 | | | | Note 1 | | |
| 29 | | | | | | |
| 30 | | | | | | |
| 31 | 16125 | 6.81 | ±10% | 550 | 120° F | 670° F |
| 32 | | | | Note 1 | | |
| 33 | | | | | | |
| 34 | 16266L1 | 2460 - 3970 | A ±5% | 5 | 120° F | 670° F |
| 35 | 16266L2 | 8060 - 13000 | B ±2% | 10 | | |
| 36 | 16266L3 | 909 - 1540 | C ±1% | 3 | | |
| 37 | | | D ±10% | Note 1 | | |
| 38 | | | E ±3% | | | |
| 39 | | | F ±.5% | | | |
| 40 | | | G ±.25% | | | |
| 41 | | | | | | |
| 42 | 16340L1 | 1.96 - 750 | ±10% | 16 | 120° F | 670° F |
| 43 | 16340L2 | 4.64 - 1780 | | 27 | | |
| 44 | 16340L3 | 9.09 - 3480 | | 39 | | |
| 45 | 16340L4 | 13.30 - 5110 | | 50 | | |
| 46 | 16340L5 | 17.80 - 6810 | | 70 | | |
| 47 | | | | Notes 1 & 4 | | |
| 48 | | | | | | |
| 49 | 16543 | 1.0 - 2430 | ±1% or .05 ohm whichever is greater | 5 | 120° F | 270° F |
| 50 | | | | | | |

KS- SPECIFICATION RESISTORS - WIRE WOUND

| BODY DIMENSIONS - DIAMETER | INCHES LENGTH | CHARACTER- ISTICS | BODY MATERIAL | ILLUS- TRATION | Line No. |
|-------------------------------|------------------|--|-------------------|-------------------|-------------|
| 1-1/8 | 1-1/4 | Note 9 | Ceramic core and | IV-29 | 1 |
| 1-1/8 | 2 | | Vitreous enamel | IV-29 | 2 |
| 1-1/8 | 3-1/2 | | insulation | IV-29 | 3 |
| 1-1/8 | 4-3/4 | | | IV-29 | 4 |
| 1-1/8 | 6 | | | IV-29 | 5 |
| 1/2 | 2 | | | IV-29 | 6 |
| | | | | | 7 |
| | | | | | 8 |
| 25/32 | 2 | Adjustable Note 9 | Ceramic core and | IV-27 | 9 |
| | | | Vitreous enamel | IV-27 | 10 |
| | | | insulation | | 11 |
| | | | | | 12 |
| | | | | | 13 |
| 13/32 | 1 | Note 9 | Ceramic core and | IV-29 | 14 |
| 15/32 | 1-3/4 | | Vitreous enamel | IV-29 | 15 |
| 1/4 | 1/2 | | insulation | IV-29 | 16 |
| 13/32 | 1 | | Ceramic core and | IV-32 | 17 |
| 15/32 | 1-3/4 | | molded Vitreous | IV-32 | 18 |
| 1/4 | 1/2 | | enamel insulation | IV-32 | 19 |
| | | | | | 20 |
| | | | | | 21 |
| 19/32 x 3 | 5-3/4 | Note 10 | Ceramic core and | IV-30 | 22 |
| 19/32 x 3 | 5-3/4 | | Vitreous enamel | IV-30 | 23 |
| Note 7 | | | insulation | | 24 |
| | | | | | 25 |
| | | | | | 26 |
| 19/32 x 3 | 5-3/4 | Note 10 | Ceramic core and | IV-30 | 27 |
| Note 7 | | | Vitreous enamel | | 28 |
| | | | insulation | | 29 |
| | | | | | 30 |
| 1-7/8 | 11-3/4 | Note 11 | Ceramic core and | IV-30 | 31 |
| | | | Vitreous enamel | | 32 |
| | | | insulation | | 33 |
| 13/32 | 1-1/16 | Note 10 | Ceramic core and | IV-29 | 34 |
| 15/32 | 1-13/16 | | Vitreous enamel | IV-29 | 35 |
| 1/4 | 9/16 | | insulation | IV-29 | 36 |
| | | | | | 37 |
| | | | | | 38 |
| | | | | | 39 |
| | | | | | 40 |
| | | | | | 41 |
| 1/2 | 2 | Adjustable | Ceramic core and | IV-31 | 42 |
| 1-1/8 | 2 | Note 9 | Vitreous enamel | IV-31 | 43 |
| 1-1/8 | 3-1/2 | | insulation | IV-31 | 44 |
| 1-1/8 | 4-3/4 | | | IV-31 | 45 |
| 1-1/8 | 6 | | | IV-31 | 46 |
| | | | | | 47 |
| | | | | | 48 |
| 9/16 | 1-3/16 | Electro- statically shielded Note 9 | Ceramic core and | IV-31 | 49 |
| | | | Vitreous enamel | | 50 |
| | | | insulation | | |

KS- SPECIFICATION RESISTORS - WIRE WOUND

| Line No. | KS- NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | AMBIENT TEMP. | DERATED TO ZERO WATTS AT TEMP. |
|----------|------------|-----------------------|--------------|--------------|---------------|--------------------------------|
| 1 | 16764L1A | 2 to 165000 | ±(1.0%+.02) | 0.60 | 150°F | |
| 2 | 16764L1D | 4 to 165000 | ±(0.5%+.02) | 0.60 | | |
| 3 | 16764L1F | 20 to 165000 | ±(0.1%+.02) | 0.60 | | |
| 4 | 16764L2A | 2 to 132000 | ±(1.0%+.02) | 0.75 | | |
| 5 | 16764L3A | 2 to 330000 | ±(1.0%+.02) | 1.00 | | |
| 6 | 16764L3D | 4 to 330000 | ±(0.5%+.02) | 1.00 | | |
| 7 | 16764L4A | 2 to 1.10 meg | ±(1.0%+.02) | 2.00 | | |
| 8 | 16764L4D | 4 to 1.10 meg | ±(0.5%+.02) | 2.00 | | |
| 9 | 16764L5A | 2 to 1.10 meg | ±(1.0%+.02) | 2.00 | | |
| 10 | 16764L6A | 2 to 3520 | ±(1.0%+.02) | 0.05 | | |
| 11 | | | | | | |
| 12 | 16814L1 | 890 | ±3.4% | | | |
| 13 | 16814L2 | 73.2 | ±1.5% | | | |
| 14 | | | | | | |
| 15 | 16822L1A | 2 to 165000 | ±(1.0%+.02) | 0.60 | 150°F | |
| 16 | | | | | | |
| 17 | | | | | | |
| 18 | | | | | | |
| 19 | 16907L1 | 1.15 | ±20% | 139 | 120°F | |
| 20 | 16907L2 | 3.0 | ±20% | 91 | | |
| 21 | | | | | | |
| 22 | 19238L1 | 3.0 | ±10% | 18 | 38°C | 300°C |
| 23 | 19238L2 | 5.0 | ±2% | | | |
| 24 | 19238L3 | 10.0 | ±10% | | | |
| 25 | 19238L4 | 25.0 | ±10% | | | |
| 26 | 19238L5 | 4.7 | ±2% | | | |
| 27 | 19238L6 | 250.0 | ±2% | | | |
| 28 | 19238L7 | 1.0 | ±5% | | | |
| 29 | 19238L8 | 15.0 | ±10% | | | |
| 30 | | | | | | |
| 31 | | | | | | |
| 32 | 19548L1 | .24 to 750 | C ±5% | 0.5 | 70°C | 150°C |
| 33 | | | G ±10% | | | |
| 34 | | | H +0-10% | | | |
| 35 | | | | | | |
| 36 | | | | | | |
| 37 | 19769L1 | 1 to 2430 | A ±5% | 12.5 | 25°C | 275°C |
| 38 | 19769L2 | 1 to 1540 | B ±2% | 8.0 | | |
| 39 | 19769L3 | 1 to 920 | C ±1% | 5.0 | | |
| 40 | | | D ±10% | | | |
| 41 | | | E ±3% | | | |
| 42 | | | | | | |
| 43 | | | | | | |
| 44 | 19863L1 | 10 | ±3% | 7.0 | 25°C | 350°C |
| 45 | 19863L2 | 9.15 | ±3% | 7.0 | | |
| 46 | | | | | | |
| 47 | | | | | | |
| 48 | 19949L1 | 7.68 | ±2% | 5.0 | 25°C | 350°C |
| 49 | | | | | | |
| 50 | | | | | | |

KS- SPECIFICATION RESISTORS - WIRE WOUND

| BODY DIMENSIONS-INCHES DIAMETER | CHARACTER- LENGTH | ISTICS | BODY MATERIAL | ILLUS- TRATION | Line No. |
|------------------------------------|----------------------|------------------|---|-------------------|--|
| 3/8 | 3/4 | Notes 17 & 18 | Ceramic or plastic core encapsulated in epoxy resin | IV-32 | 1 |
| 3/8 | 3/4 | | | | 2 |
| 3/8 | 3/4 | | | | 3 |
| 1/4 | 1 | | | | 4 |
| 3/8 | 1 | | | | 5 |
| 3/8 | 1 | | | | 6 |
| 1/2 | 2 | | | | 7 |
| 1/2 | 2 | | | | 8 |
| 1/2 | 2 | | | | 9 |
| 1/8 | 5/16 | | | | 10 |
| .675 | 1.585 | | Porcelain and Vitreous enamel | IV-25 | 11 12 13 14 |
| 3/8 | 3/4 | Notes 17 & 20 | Ceramic or plastic core encapsulated in epoxy resin | IV-25 | 15 16 17 18 |
| 1-5/8 | 6-1/2 | Note 21 | Vitreous enamel | IV-30 | 19 20 21 |
| 1-3/8 | 3/8 thick | Note 22 | Ceramic covered with Vitreous enamel | IV-32 | 22 23 24 25 26 27 28 29 30 31 |
| .148 | .400 | | Molded | IV-25 | 32 33 34 35 36 |
| 3/8 3/8 3/8 | 1-3/4 1-5/16 1 | Note 20 | Ceramic and Vitreous enamel | IV-32 | 37 38 39 40 41 42 43 |
| 5/16 5/16 | 1 1 | Note 23 | Ceramic and Vitreous enamel | IV-29 | 44 45 46 47 |
| 13/32 | 1 | Note 24 | Ceramic and Vitreous enamel | IV-29 | 48 49 50 |

KS- SPECIFICATION RESISTORS - WIRE WOUND

NOTES:

1. For applications in which the high surface temperature of these resistors may introduce a personnel hazard in the telephone plant when used at rated wattages, it is recommended that resistors be used such that the power load does not exceed 50% of the rating shown in the table.
2. For multi-winding or tapped winding resistors, the total allowable wattage dissipation shall be reduced by the amount equivalent to the reduction in winding space effected by the additional terminals.
3. See the special table for KS-8512 resistors on page IV-4 showing list numbers and their individual resistance ranges, ratings in watts, and dimensions.
4. The wattage rating in the table applies for the entire winding. The watts dissipated in any section resulting from the location of adjusting bands shall not exceed the proportion determined from the following formula:

$$\text{Watts (section)} = \frac{\text{Resistance of section}}{\text{Res. of entire winding}} \times \frac{\text{Resistor Rating}}{\text{in Watts}}$$

5. Only the following nominal values of resistance are available under specification KS-13809:

| <u>List No.</u> | <u>Resistance - Megohms</u> |
|-----------------|------------------------------|
| 1 | 3.5, 4.0, 5.0, 6.0 |
| 2 | 1.0, 1.5, 2.0, 2.5, 3.0, 3.5 |
| 3 | 0.5, 0.8, 1.0 |

The resistance value in megohms, the power rating in watts, and the maximum rating in kilovolts are numerically equal, that is, a resistor per KS-13809L1 having a nominal resistance value of 3.5 megohms has a power rating of 3.5 watts and a maximum voltage rating of 3.5 KV.

6. The maximum voltages to be applied across the resistors are numerically equal in KV to the resistance in megohms, that is, the maximum voltage of the 3.5 megohm resistor is 3.5 KV.
7. This resistor is rectangular in shape.

| | <u>Temp. Coefficient of Res.</u> | <u>Material or Resistor Requirement</u> |
|-----|---|---|
| 8. | Max. +200 ppm/°C | Resistor Requirement |
| 9. | + 300 ppm/°C - 50 ppm/°C | Material Requirement |
| 10. | Max. +150 ppm/°C | Material Requirement |
| 11. | Max. +300 ppm/°C | Material Requirement |
| 12. | (1 to 10 ohms) ±650 ppm/°C (More than 10 ohms) ±300 ppm/°C | Resistor Requirement |
| 13. | Max. +130 ppm/°F or ± 20 ppm/°F as specified in order | Resistor Requirement |

NOTES: (Contd.)

| | <u>Temp. Coefficient of Res.</u> | <u>Material or Resistor Requirement</u> |
|-----|--|---|
| 14. | +260 ppm/°C to +400 ppm/°C at high and low resistance ranges respectively. | Resistor Requirement |
| 15. | Resistor is marked with EIA color code as illustrated on page IV-22 to indicate nominal resistance in ohms and tolerance. See Table 2, page IV-22 for nominal resistance values and tolerances in which the resistance values are available (EIA Preferred Number System), and Table 3, page IV-22 for color code. | |
| 16. | See Table 5, page IV-24 for nominal resistance values available. | |
| 17. | NOT RECOMMENDED for general use. Components Laboratory, Resistor Development Group should be consulted for new applications. | |
| 18. | Temperature coefficient of resistance is as follows: | |
| | L1, L2, L3, L4 | ±30 ppm/°C |
| | L5 | ±15 ppm/°C |
| | L6 | ±20 ppm/°C |
| 19. | Temperature coefficient of resistance is ±30 ppm/°C. | |
| 20. | Low inductance. | |
| 21. | L1 has taps provided at 0.05, 0.15, 0.35, and 0.75 ohms. It is designed for a maximum current of 11 amperes. L2 has taps provided at 0.2, 0.6, and 1.4 ohms. It is designed for maximum current of 5.5 amperes. Wattage rating is based on maximum resistance. | |
| 22. | Temperature coefficient of resistance for L2 and L5 is ±50 ppm/°C. All other lists are ±150 ppm/°C. | |
| 23. | Inductance for L1 is 1.80 max., 1.40 min.; for L2 is 1.85 max., 1.45 min. | |
| 24. | Has maximum series inductance of 0.7 uh. | |

KS- SPECIFICATION RESISTORS - FIXED COMPOSITION

| Line No. | KS-NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | AMBIENT TEMP. | DERATED TO ZERO WATTS AT TEMP. |
|----------|-----------|-----------------------|-----------|--------------|---------------|--------------------------------|
| 1 | 13490L1 | 10 ohms to 22 meg | ±5% | 1/2 | 104°F | 212°F |
| 2 | 13490L2 | 10 ohms to 22 meg | ±10% | Note 1 | | |
| 3 | 13490L3 | 10 ohms to 22 meg | ±20% | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | 13491L1 | 2.7 ohms to 22 meg | ±5% | 1 | 104°F | 212°F |
| 7 | 13491L2 | 2.7 ohms to 22 meg | ±10% | Note 2 | | |
| 8 | 13491L3 | 2.7 ohms to 22 meg | ±20% | | | |
| 9 | | | | | | |
| 10 | | | | | | |
| 11 | 13492L1 | 10 ohms to 22 meg | ±5% | 2 | 104°F | 212°F |
| 12 | 13492L2 | 10 ohms to 22 meg | ±10% | Note 3 | | |
| 13 | 13492L3 | 10 ohms to 22 meg | ±20% | | | |
| 14 | | | | | | |
| 15 | | | | | | |
| 16 | 16645L1 | 2.7 ohms to 22 meg | ±5% | 1/4 | 104°F | 212°F |
| 17 | 16645L2 | 2.7 ohms to 22 meg | ±10% | Note 4 | | |
| 18 | 16645L3 | 2.7 ohms to 22 meg | ±20% | | | |
| 19 | | | | | | |
| 20 | | | | | | |
| 21 | 19077L1 | 10 to 10000 | ±10% | 1/4 | 100°C | |
| 22 | 19077L2 | 10 to 10000 | ±5% | | | |
| 23 | | | | | | |
| 24 | | | | | | |
| 25 | 19150L1 | 2.7 ohms to 22 meg | ±5% | 0.5 | 70°C | |
| 26 | 19150L2 | 2.7 ohms to 22 meg | ±10% | | | |
| 27 | 19150L3 | 2.7 ohms to 22 meg | ±20% | | | |
| 28 | | | | | | |
| 29 | | | | | | |
| 30 | 19151L1 | 2.7 ohms to 22 meg | ±5% | 1 | 70°C | |
| 31 | 19151L2 | 2.7 ohms to 22 meg | ±10% | | | |
| 32 | 19151L3 | 2.7 ohms to 22 meg | ±20% | | | |
| 33 | | | | | | |
| 34 | | | | | | |
| 35 | 19152L1 | 10 ohms to 22 meg | ±5% | 2 | 70°C | |
| 36 | 19152L2 | 10 ohms to 22 meg | ±10% | | | |
| 37 | 19152L3 | 10 ohms to 22 meg | ±20% | | | |

KS- SPECIFICATION RESISTORS - FIXED COMPOSITION

| BODY DIMENSIONS - INCHES | | CHARACTERISTICS & SHELF AGING | BODY MATERIAL | ILLUS-Line TRATION No. |
|--------------------------|--------|---|--|------------------------|
| DIAMETER | LENGTH | | | |
| .148 | .406 | -8% to +11% -13% to +16% -23% to +26% Notes 5,6,& 7 | Fixed carbon composition resistive element encased in plastic compound. Axial leads. | IV-25 1 |
| | | | | 2 |
| | | | | 3 |
| | | | | 4 |
| | | | | 5 |
| .233 | .593 | -8% to +11% -13% to +16% -23% to +26% Notes 5,6,& 7 | Fixed carbon composition resistive element encased in plastic compound. Axial leads. | IV-25 6 |
| | | | | 7 |
| | | | | 8 |
| | | | | 9 |
| .336 | .728 | -8% to +11% -13% to +16% -23% to +26% Notes 5,6,& 7 | Fixed carbon composition resistive element encased in plastic compound. Axial leads | IV-25 10 |
| | | | | 11 |
| | | | | 12 |
| | | | | 13 |
| | | | | 14 |
| | | | | 15 |
| .090 | .250 | -8% to +11% -13% to +16% -23% to +26% Notes 5,6,7, & 8 | Fixed carbon composition resistive element encased in plastic compound. Axial leads | IV-25 16 |
| | | | | 17 |
| | | | | 18 |
| | | | | 19 |
| | | | | 20 |
| .200 | .585 | See Note 9 | Fixed composition. Plastic encased. | IV-32 21 |
| | | | | 22 |
| | | | | 23 |
| | | | | 24 |
| .148 | .406 | See Note 8 | Fixed carbon composition resistive element encased in plastic compound. Axial leads. | IV-25 25 |
| | | | | 26 |
| | | | | 27 |
| | | | | 28 |
| | | | | 29 |
| .233 | .593 | See Note 8 | Fixed carbon composition resistive element encased in plastic compound. Axial leads. | IV-25 30 |
| | | | | 31 |
| | | | | 32 |
| | | | | 33 |
| | | | | 34 |
| .320 | .719 | See Note 8 | Fixed carbon composition resistive element encased in plastic compound. Axial leads. | IV-25 35 |
| | | | | 36 |
| | | | | 37 |

KS- SPECIFICATION RESISTORS - FIXED COMPOSITION

NOTES:

- | | RMS or DC
<u>Max. Voltage Rating</u> | <u>Critical Resistance Value</u> |
|----|---|----------------------------------|
| 1. | 350 Volts | 245000 ohms |
| 2. | 500 Volts | 250000 ohms |
| 3. | 500 Volts | 125000 ohms |
| 4. | 250 Volts | 250000 ohms |
5. Resistance - Temperature characteristics:
When ambient is changed from 25°C to the following temperatures, the changes in resistance fall within the following ranges. This is a resistor requirement.

| | <u>10000 ohms or lower</u> | <u>Above 10000 ohms</u> |
|-----------------|----------------------------|-------------------------|
| -55°C +105°C | -0%, +10% ±8% | -0%, +20% ±10% |

6. Typical limiting frequencies above which a decrease of more than 10% from DC resistance value can be expected.

| <u>Nominal Resistance Value</u> | <u>Approx. Max. Frequency for -10% Change</u> |
|---------------------------------|---|
| 10000 ohms | 10 MC |
| 0.1 meg | 1 MC |
| 1 meg | 100 KC |
| 10 meg | 10 KC |

7. Resistor is marked with EIA color code as illustrated on page IV-23 to indicate nominal resistance in ohms, and tolerances. See Table 4, page IV-23 for nominal resistance values and tolerances in which the resistance values are available (EIA Preferred Numbers System), and Table 3, page IV-22 for the color code.
8. High reliability. It is intended that the failure rate will be less than 15 failure units per 1000 hours when operated at 50% of the rated power at 25°C.
9. Temperature coefficient of resistance is +7000 ppm/°C.

KS- SPECIFICATION RESISTORS - DEPOSITED CARBON, METAL, OR METAL OXIDE

| Line No. | KS- NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | DERATED TO | |
|----------|------------|-----------------------|-----------|--------------|---------------|---------------------|
| | | | | | AMBIENT TEMP. | ZERO WATTS AT TEMP. |
| 1 | 16311L1 | 10 to 511000 | Note 9 | 1/8 | 158°F | 300°F |
| 2 | 16311L2 | 50 to 511000 | ±5% | | | |
| 3 | 16311L3 | 30 to 261000 | Note 9 | | | |
| 4 | 16311L4 | 20 to 200000 | Note 9 | | | |
| 5 | 16311L5 | 20 to 200000 | Note 9 | | | |
| 6 | 16311L6 | 20 to 200000 | Note 9 | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | 16312L1 | 15 to 866000 | Note 9 | 1/4 | 158°F | 300°F |
| 10 | 16312L2 | 20 to 511000 | ±5% | | | |
| 11 | 16312L3 | 10 to 402000 | Note 9 | | | |
| 12 | 16312L4 | 24.9 to 402000 | Note 9 | | | |
| 13 | 16312L5 | 49.9 to 402000 | Note 9 | | | |
| 14 | 16312L6 | 10 to 402000 | Note 9 | | | |
| 15 | | | | | | |
| 16 | | | | | | |
| 17 | 16313L1 | 10 to 1.91 meg | Note 9 | 1/2 | 158°F | 300°F |
| 18 | 16313L2 | 10 to 1.10 meg | ±5% | | | |
| 19 | 16313L3 | 10 to 866000 | Note 9 | | | |
| 20 | 16313L4 | 20 to 866000 | Note 9 | | | |
| 21 | 16313L5 | 49.9 to 866000 | Note 9 | | | |
| 22 | 16313L6 | 10 to 866000 | Note 9 | | | |
| 23 | | | | | | |
| 24 | | | | | | |
| 25 | 16314L1 | 10 to 1.91 meg | Note 9 | 1.0 | 158°F | 300°F |
| 26 | 16314L2 | 10 to 5.11 meg | ±5% | | | |
| 27 | 16314L3 | 24.9 to 1.91 meg | Note 9 | | | |
| 28 | 16314L4 | 24.9 to 1.91 meg | Note 9 | | | |
| 29 | 16314L5 | 24.9 to 1.91 meg | Note 9 | | | |
| 30 | 16314L6 | 24.9 to 1.91 meg | Note 9 | | | |
| 31 | | | | | | |
| 32 | | | | | | |
| 33 | 16315L1 | 20 to 10 meg | Note 9 | 2.0 | 158°F | 300°F |
| 34 | 16315L2 | 30 to 10 meg | ±5% | | | |
| 35 | 16315L3 | 50 to 2 meg | Note 9 | | | |
| 36 | 16315L4 | 50 to 2 meg | Note 9 | | | |
| 37 | 16315L5 | 50 to 2 meg | Note 9 | | | |
| 38 | 16315L6 | 50 to 2 meg | Note 9 | | | |

KS - SPECIFICATION RESISTORS - DEPOSITED CARBON, METAL, OR METAL OXIDE

| BODY DIMENSIONS - INCHES | | CHARACTERISTICS | BODY MATERIAL | ILLUS-TRATION | Line No. |
|--------------------------|--------|-----------------|--|---------------|----------|
| DIAMETER | LENGTH | | | | |
| .165 | .437 | Notes 2 & 8 | Ceramic core with moisture resistant enclosure. Axial leads. Note 7. | IV-32 | 1 |
| .125 | .375 | Notes 2 & 8 | | | 2 |
| .100 | .282 | Notes 1 & 8 | | | 3 |
| .100 | .282 | Notes 1 & 8 | | | 4 |
| .100 | .282 | Notes 1 & 8 | | | 5 |
| .100 | .282 | Notes 1 & 8 | | | 6 |
| | | | | | 7 |
| | | | | | 8 |
| .250 | .657 | Notes 3 & 8 | Ceramic core with moisture resistant enclosure. Axial leads. Note 7 | IV-32 | 9 |
| .188 | .625 | Notes 3 & 8 | | | 10 |
| .155 | .421 | Notes 2 & 8 | | | 11 |
| .155 | .421 | Notes 2 & 8 | | | 12 |
| .155 | .421 | Notes 2 & 8 | | | 13 |
| .155 | .421 | Notes 2 & 8 | | | 14 |
| | | | | | 15 |
| | | | 16 | | |
| .282 | .843 | Notes 4 & 8 | Ceramic core with moisture resistant enclosure. Axial leads. Note 7 | IV-32 | 17 |
| .250 | .750 | Notes 4 & 8 | | | 18 |
| .248 | .610 | Notes 3 & 8 | | | 19 |
| .248 | .610 | Notes 3 & 8 | | | 20 |
| .248 | .610 | Notes 3 & 8 | | | 21 |
| .248 | .610 | Notes 3 & 8 | | | 22 |
| | | | | | 23 |
| | | | 24 | | |
| .437 | 1.125 | Notes 5 & 8 | Ceramic core with moisture resistant enclosure. Axial leads. Note 7 | IV-32 | 25 |
| .375 | 1.062 | Notes 5 & 8 | | | 26 |
| .281 | .760 | Notes 4 & 8 | | | 27 |
| .281 | .760 | Notes 4 & 8 | | | 28 |
| .281 | .760 | Notes 4 & 8 | | | 29 |
| .281 | .760 | Notes 4 & 8 | | | 30 |
| | | | 31 | | |
| | | | 32 | | |
| .437 | 2.281 | Notes 6 & 8 | Ceramic core with moisture resistant enclosure. Axial leads. Note 7. | IV-32 | 33 |
| .375 | 2.188 | Notes 6 & 8 | | | 34 |
| .437 | 2.281 | Notes 6 & 8 | | | 35 |
| .437 | 2.281 | Notes 6 & 8 | | | 36 |
| .437 | 2.281 | Notes 6 & 8 | | | 37 |
| .437 | 2.281 | Notes 6 & 8 | | | 38 |

KS- SPECIFICATION RESISTORS - DEPOSITED CARBON, METAL, OR METAL OXIDE

NOTES :

| | <u>Max. Voltage Rating</u> | <u>Critical Resistance Value</u> |
|---|----------------------------|----------------------------------|
| 1. | 200 volts | |
| 2. | 250 volts | 500000 ohms |
| 3. | 300 volts | 360000 ohms |
| 4. | 350 volts | 250000 ohms |
| 5. | 500 volts | 250000 ohms |
| 6. | 750 volts | 281000 ohms |
| 7. KS-16311 to KS-16314 resistors, inclusive, may be mounted by their lead wires. Mounting straps are recommended for use in mounting the KS-16315 resistors. | | |
| 8. Temperature coefficient of resistance is as follows: | | |
| | List 1 and 2 | ±500 ppm/°C |
| | List 3 | ±250 ppm/°C |
| | List 4 | ±50 ppm/°C |
| | List 5 | ±25 ppm/°C |
| | List 6 | ±100 ppm/°C |
| 9. Add suffix as follows to the list number for tolerance: | | |
| | A ±1% | Lists 1, 3, 4, 5, 6 |
| | B ±2% | Lists 3, 4, 5, 6 |
| | C ±5% | Lists 1, 3, 4, 5, 6 |
| | D ±1/2% | Lists 4, 5, 6 |
| | E ±1/4% | Lists 3, 4, 5, 6 |
| | F ±0.1% | Lists 4, 5, 6 |

KS- SPECIFICATION RESISTORS - DEPOSITED CARBON, METAL, OR METAL FILM

| Line No. | KS- NUMBER | RESISTANCE RANGE OHMS | TOLERANCE | RATING WATTS | AMBIENT TEMP. | DERATED TO ZERO WATTS AT TEMP. |
|----------|------------|-----------------------|-----------|--------------|---------------|--------------------------------|
| 1 | 16896L1 | 4000 to 2.56 meg | - | 1/4 | 50°C | - |
| 2 | | Note 2 | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | 19113L1A | 10 to 1.3 meg | ±5% | 2.0 | 70°C | 150°C |
| 6 | 19114L1D | 10 to 1.3 meg | ±10% | | | Note 5 |
| 7 | 19113L2A | 120 to 39000 | ±5% | 3.0 | 40°C | |
| 8 | 19113L2D | 120 to 39000 | ±10% | | | |
| 9 | 19113L3A | 120 to 82000 | ±5% | 4.0 | 40°C | |
| 10 | 19113L3D | 120 to 82000 | ±10% | | | |
| 11 | 19113L4A | 180 to 82000 | ±5% | 5.0 | 40°C | |
| 12 | 19113L4D | 180 to 82000 | ±10% | | | |
| 13 | 19113L5A | 180 to 82000 | ±5% | 7.0 | 40°C | |
| 14 | 19113L5D | 180 to 82000 | ±10% | | | |
| 15 | | | | | | |
| 16 | | | | | | |
| 17 | 19756L1 | 50 to 20000 | Note 3 | 0.1 | 70°C | 150°C |
| 18 | 19756L2 | 50 to 20000 | | | | |
| 19 | 19756L3 | 100 to 20000 | | | | |
| 20 | | | | | | |


NOTES:

- Temperature coefficient of resistance is as follows:
 List 1 ±100 ppm/°C
 List 2 ±50 ppm/°C
 List 3 ±25 ppm/°C
- NOT RECOMMENDED for general use. Components Laboratory, Resistor Development Group should be consulted for any new use. Consists of a group of seven resistors closely interrelated with respect to specific ratios of resistance values.
- Add suffix as follows to the list number for tolerance:
 A ±1% Lists 1, 2, 3
 D ±1/2% Lists 1, 2, 3
 E ±1/4% Lists 2, 3
- Maximum temperature coefficient of resistance is +375 ppm/°C.
- Resistor should not be used in an ambient greater than 150°C.

KS- SPECIFICATION RESISTORS - DEPOSITED CARBON, METAL, OR METAL OXIDE

| BODY DIMENSIONS-INCHES | | CHARACTER- ISTICS | BODY MATERIAL | ILLUS- TRATION | Line No. |
|------------------------|--------|----------------------|---------------------------------------|-------------------|-------------|
| DIAMETER | LENGTH | | | | |
| .250 | .657 | Note 2 | Metal film encapsulated in plastic | IV-32 | 1 |
| | | | | | 2 |
| | | | | | 3 |
| | | | | | 4 |
| .336 | 11/16 | Note 4 | Metal film, insulated | IV-32 | 5 |
| | | | | | 6 |
| .375 | 15/16 | | | | 7 |
| | | | | | 8 |
| .375 | 1-9/16 | | | | 9 |
| | | | | | 10 |
| .375 | 1-3/4 | | | | 11 |
| | | | | | 12 |
| .375 | 2-1/16 | | | | 13 |
| | | | | | 14 |
| | | | | | 15 |
| | | | | | 16 |
| .065 | .152 | Note 1 | Metal film encapsulated in plastic | IV-32 | 17 |
| | | | | | 18 |
| | | | | | 19 |
| | | | | | 20 |

KS- SPECIFICATION RESISTORS

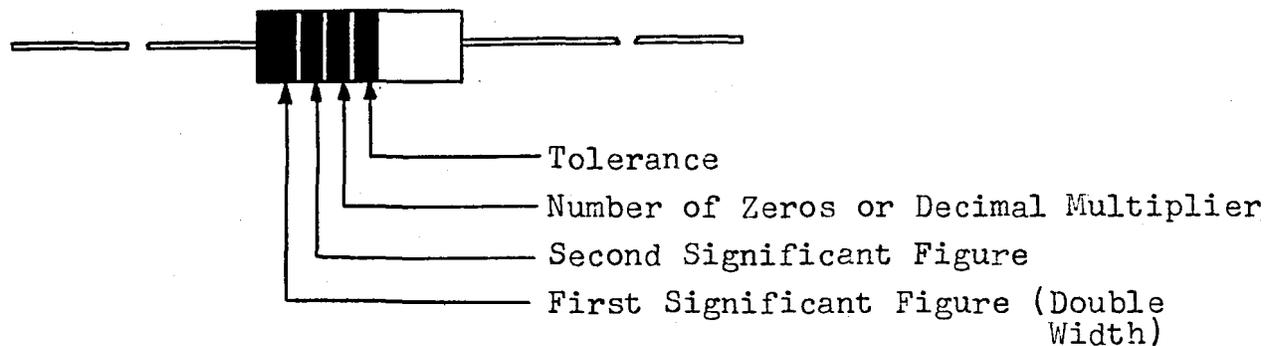

COLOR CODE MARKING


TABLE 2

NOMINAL RESISTANCE VALUES
(EIA PREFERRED NUMBER SYSTEM)

| NOMINAL RESISTANCE | | | | AVAILABLE IN |
|--------------------|----|-----|------|--------------|
| OHMS | | | | TOLERANCES |
| | | | | ± PERCENT |
| 1.0 | 10 | 100 | 1000 | 5,10 |
| 1.1 | 11 | 110 | 1100 | 5 |
| 1.2 | 12 | 120 | 1200 | 5,10 |
| 1.3 | 13 | 130 | 1300 | 5 |
| 1.5 | 15 | 150 | 1500 | 5,10 |
| 1.6 | 16 | 160 | 1600 | 5 |
| 1.8 | 18 | 180 | 1800 | 5,10 |
| 2.0 | 20 | 200 | 2000 | 5 |
| 2.2 | 22 | 220 | 2200 | 5,10 |
| 2.4 | 24 | 240 | 2400 | 5 |
| 2.7 | 27 | 270 | 2700 | 5,10 |
| 3.0 | 30 | 300 | 3000 | 5 |
| 3.3 | 33 | 330 | 3300 | 5,10 |
| 3.6 | 36 | 360 | 3600 | 5 |
| 3.9 | 39 | 390 | 3900 | 5,10 |
| 4.3 | 43 | 430 | 4300 | 5 |
| 4.7 | 47 | 470 | 4700 | 5,10 |
| 5.1 | 51 | 510 | | 5 |
| 5.6 | 56 | 560 | | 5,10 |
| 6.2 | 62 | 620 | | 5 |
| 6.8 | 68 | 680 | | 5,10 |
| 7.5 | 75 | 750 | | 5 |
| 8.2 | 82 | 820 | | 5,10 |
| 9.1 | 91 | 910 | | 5 |

TABLE 3

| COLOR | FIGURE OR NO. OF ZEROS | DEC. MULTIPLIER | TOL. % |
|----------|------------------------|-----------------|--------|
| BLACK | 0 | | |
| BROWN | 1 | | |
| RED | 2 | | |
| ORANGE | 3 | | |
| YELLOW | 4 | | |
| GREEN | 5 | | |
| BLUE | 6 | | |
| VIOLET | 7 | | |
| GRAY | 8 | | |
| WHITE | 9 | | |
| GOLD | | 0.10 | ±5 |
| SILVER | | 0.01 | ±10 |
| NO COLOR | | | ±20 |

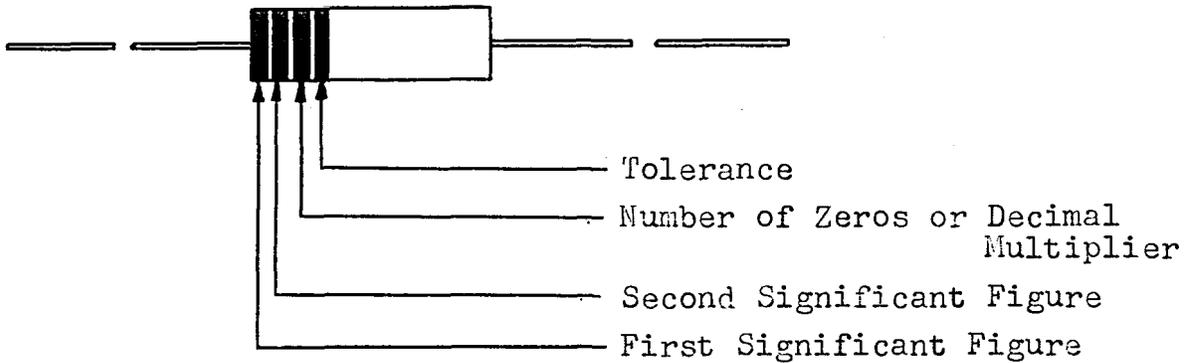

COLOR CODE MARKING


TABLE 4

NOMINAL RESISTANCE VALUES
(EIA PREFERRED NUMBER SYSTEM)

| NOMINAL RESISTANCE | | | | | AVAILABLE IN TOLERANCES | |
|--------------------|------|------|---------|-------------|-------------------------|---------|
| | OHMS | | MEGOHMS | | ± PERCENT | |
| 10 | 100 | 1000 | 10000 | 0.10,1.0,10 | 5,10,20 | |
| 11 | 110 | 1100 | 11000 | 0.11,1.1,11 | 5 | |
| 12 | 120 | 1200 | 12000 | 0.12,1.2,12 | 5,10 | |
| 13 | 130 | 1300 | 13000 | 0.13,1.3,13 | 5 | |
| 15 | 150 | 1500 | 15000 | 0.15,1.5,15 | 5,10,20 | |
| 16 | 160 | 1600 | 16000 | 0.16,1.6,16 | 5 | |
| 18 | 180 | 1800 | 18000 | 0.18,1.8,18 | 5,10 | |
| 20 | 200 | 2000 | 20000 | 0.20,2.0,20 | 5 | |
| 22 | 220 | 2200 | 22000 | 0.22,2.2,22 | 5,10,20 | |
| 24 | 240 | 2400 | 24000 | 0.24,2.4, | 5 | |
| 2.7 | 27 | 270 | 2700 | 27000 | 0.27,2.7 | 5,10 |
| 3.0 | 30 | 300 | 3000 | 30000 | 0.30,3.0 | 5 |
| 3.3 | 33 | 330 | 3300 | 33000 | 0.33,3.3 | 5,10,20 |
| 3.6 | 36 | 360 | 3600 | 36000 | 0.36,3.6 | 5 |
| 3.9 | 39 | 390 | 3900 | 39000 | 0.39,3.9 | 5,10 |
| 4.3 | 43 | 430 | 4300 | 43000 | 0.43,4.3 | 5 |
| 4.7 | 47 | 470 | 4700 | 47000 | 0.47,4.7 | 5,10,20 |
| 5.1 | 51 | 510 | 5100 | 51000 | 0.51,5.1 | 5 |
| 5.6 | 56 | 560 | 5600 | 56000 | 0.56,5.6 | 5,10 |
| 6.2 | 62 | 620 | 6200 | 62000 | 0.62,6.2 | 5 |
| 6.8 | 68 | 680 | 6800 | 68000 | 0.68,6.8 | 5,10,20 |
| 7.5 | 75 | 750 | 7500 | 75000 | 0.75,7.5 | 5 |
| 8.2 | 82 | 820 | 8200 | 82000 | 0.82,8.2 | 5,10 |
| 9.1 | 91 | 910 | 9100 | 91000 | 0.91,9.1 | 5 |


TABLE 5

| NOMINAL RESISTANCE VALUES - OHMS | | | | | |
|----------------------------------|-----|----|-----|------|-------|
| 0.1 | 1.0 | 10 | 100 | 1000 | 10000 |
| 0.11 | 1.1 | 11 | 110 | 1100 | 11000 |
| 0.12 | 1.2 | 12 | 120 | 1200 | 12000 |
| 0.14 | 1.4 | 14 | 140 | 1400 | 14000 |
| 0.16 | 1.6 | 16 | 160 | 1600 | 16000 |
| 0.18 | 1.8 | 18 | 180 | 1800 | 18000 |
| 0.20 | 2.0 | 20 | 200 | 2000 | 20000 |
| 0.22 | 2.2 | 22 | 220 | 2200 | 22000 |
| 0.25 | 2.5 | 25 | 250 | 2500 | 25000 |
| 0.28 | 2.8 | 28 | 280 | 2800 | 28000 |
| 0.31 | 3.1 | 31 | 310 | 3100 | 31000 |
| 0.35 | 3.5 | 35 | 350 | 3500 | 35000 |
| 0.40 | 4.0 | 40 | 400 | 4000 | 40000 |
| 0.45 | 4.5 | 45 | 450 | 4500 | 45000 |
| 0.50 | 5.0 | 50 | 500 | 5000 | 50000 |
| 0.56 | 5.6 | 56 | 560 | 5600 | 56000 |
| 0.63 | 6.3 | 63 | 630 | 6300 | 63000 |
| 0.71 | 7.1 | 71 | 710 | 7100 | 71000 |
| 0.80 | 8.0 | 80 | 800 | 8000 | |
| 0.90 | 9.0 | 90 | 900 | 9000 | |

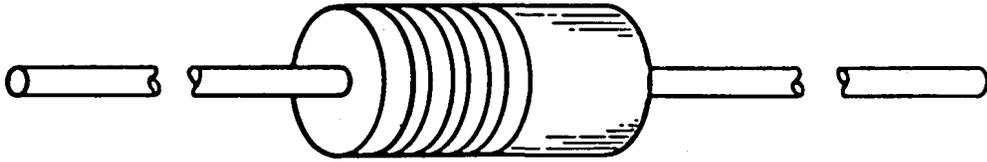


*~~KS-8441, KS-8451, KS-8452~~; KS-13490, KS-13491, KS-13492, KS-16645,
KS-19113, KS-19150, KS-19151, KS-19152, & KS-19548


* MANUFACTURE DISCONTINUED

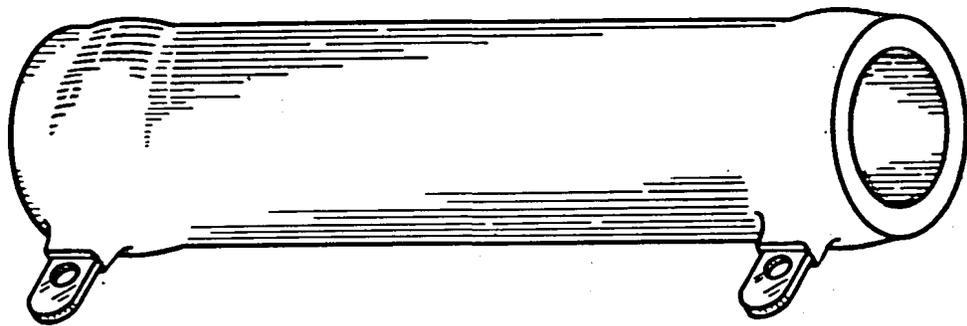


KS-8512L22 (Other KS-8512 Resistors
similar in appearance except as
shown in illustration on following
page)
KS-16814 similar in appearance

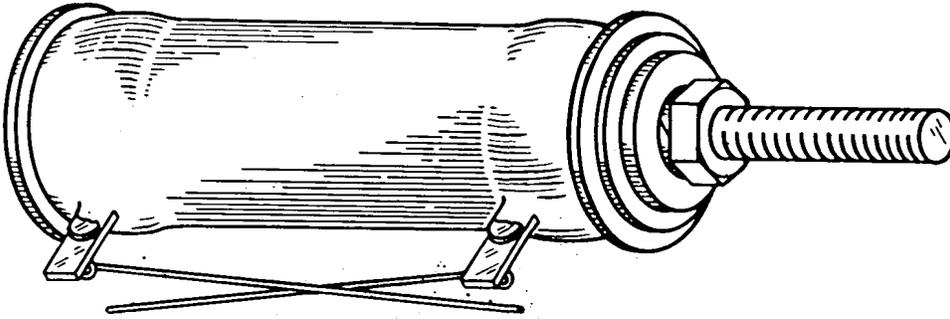


KS-8512,L17 Showing Method of Mounting

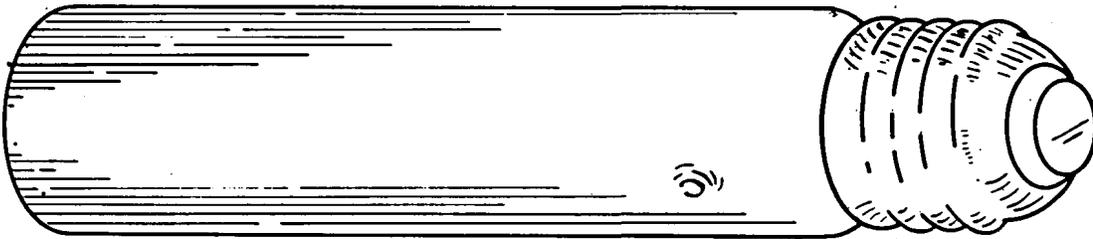

KS-8512,L45,L46,L47,L48, & L49
General Appearance

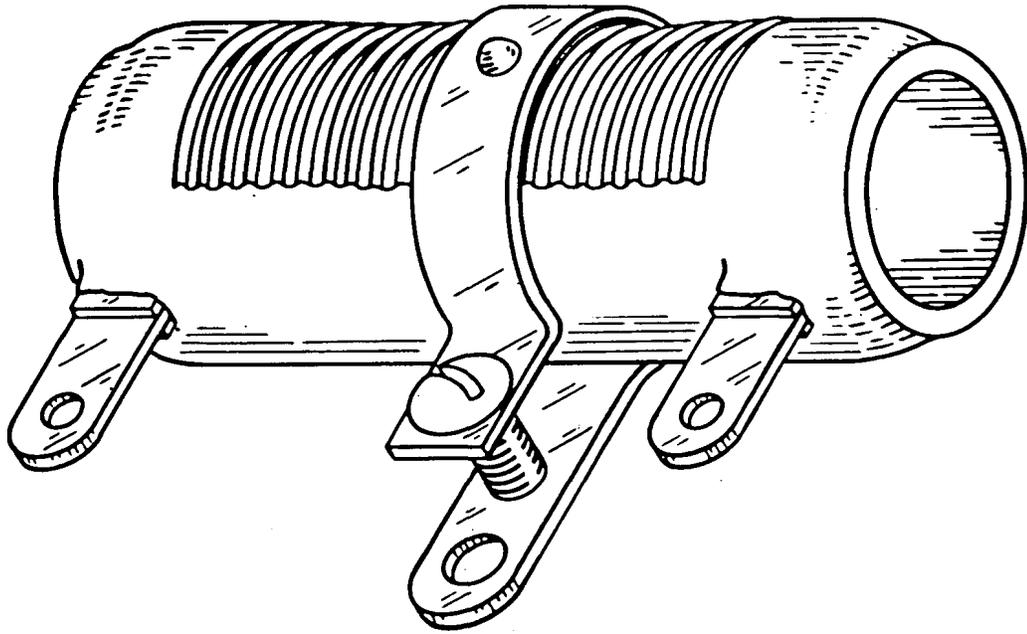


KS-9913, KS-9914, KS-13653, & KS-14272
Resistors

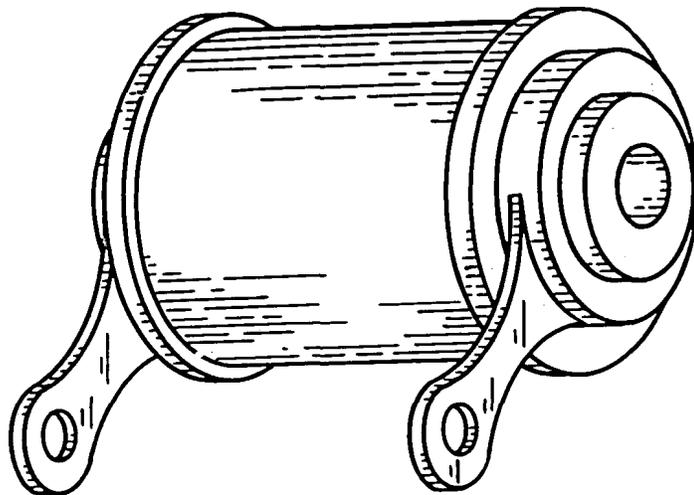


KS-13192, L5 Resistor


KS- SPECIFICATION RESISTORS

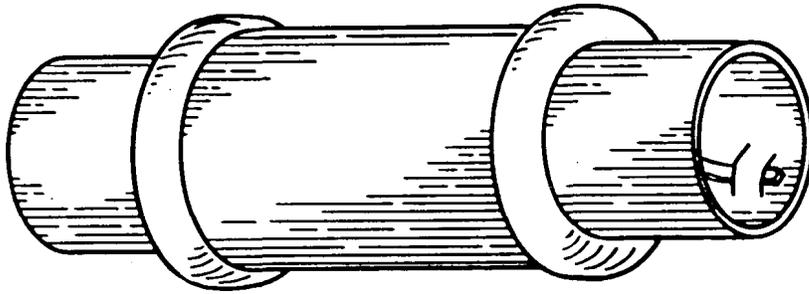


KS-13609, L7 Resistor

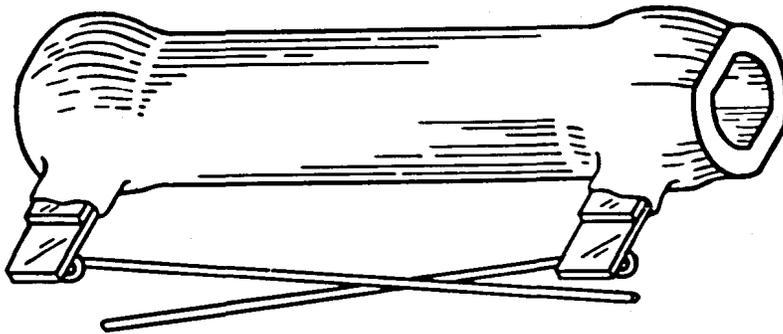


KS-13657, L1 Resistor

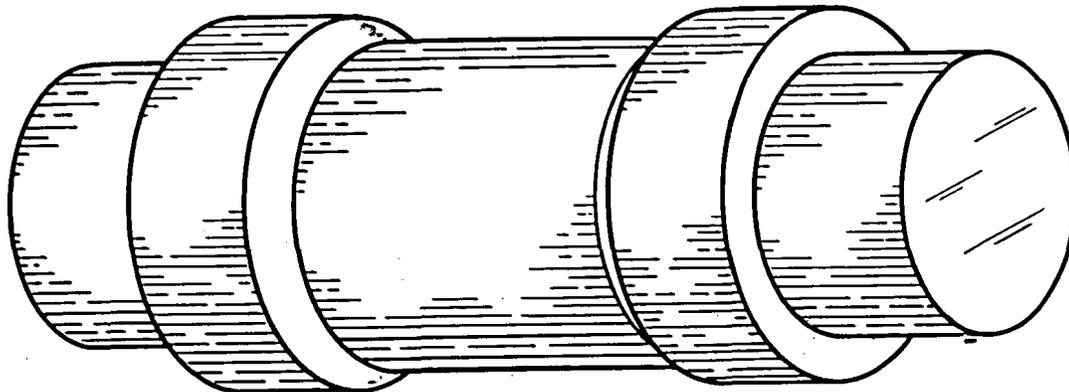


KS-13809, L3 Resistor

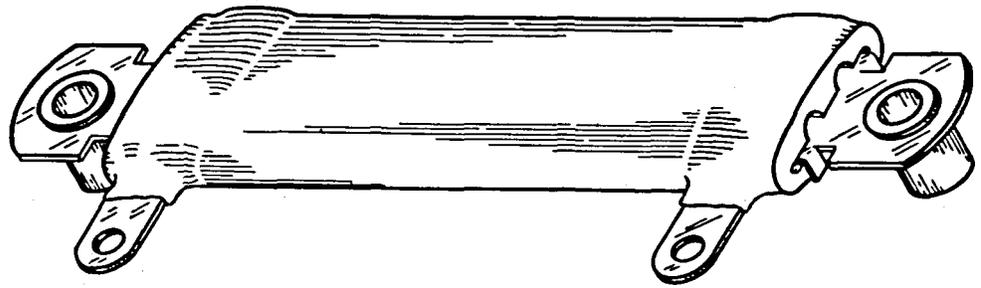


KS-14175, L3 (Representative of L1 - L5)
Resistor

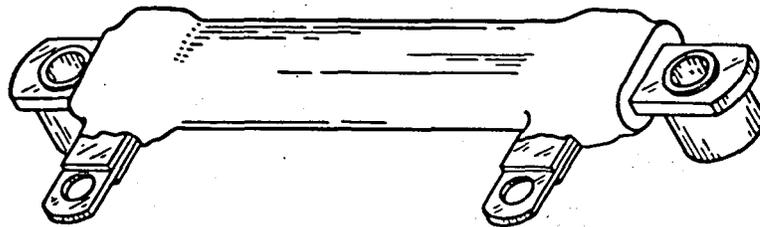


KS-14175, L6 Resistor

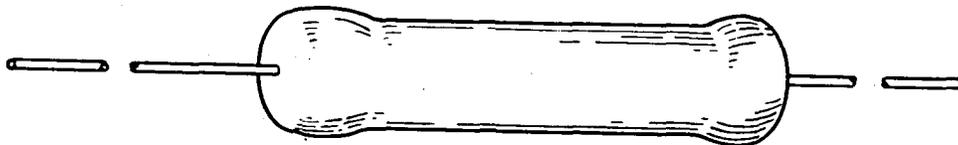


KS-14603, KS-16266, KS-19863, &
KS-19949 Resistors

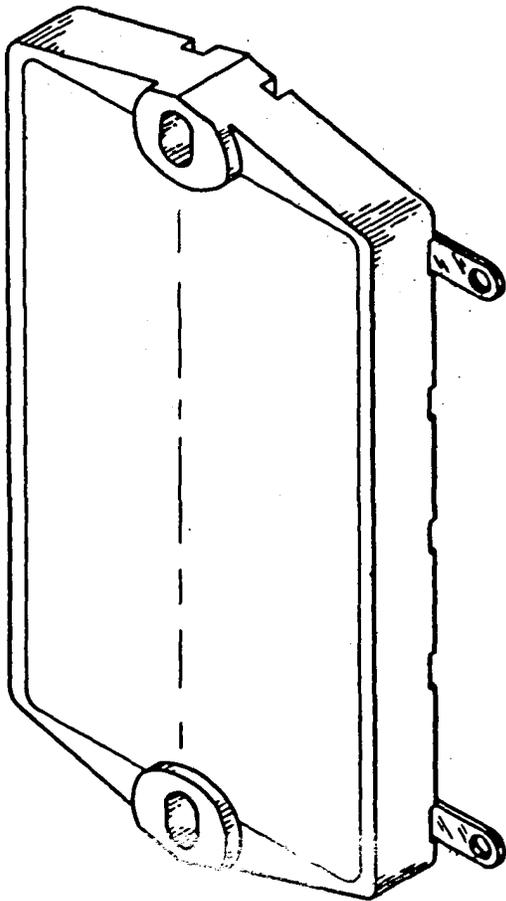


KS-16122 Resistor &
KS-16073 Resistor

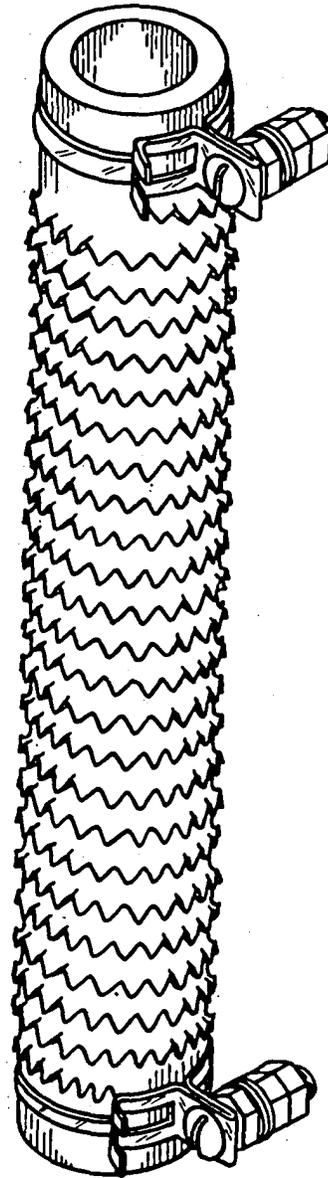


KS-16125 Resistor
KS-16907 Resistor similar
except has four taps and
no mounting lugs

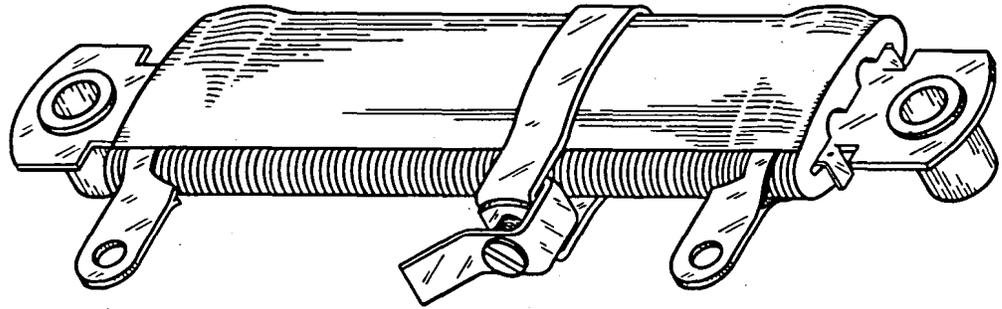

KS-16340, L3 (Representative of L2 - L5)
Resistor

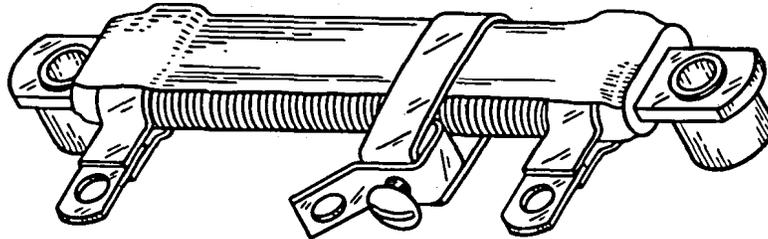


KS-16340, L1 Resistor

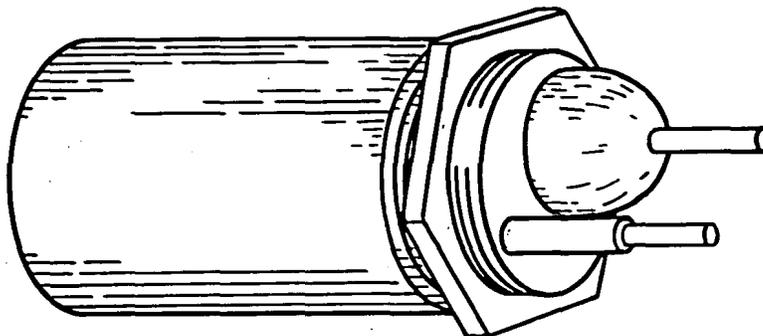

KS-16543 Resistor


KS- SPECIFICATION RESISTORS

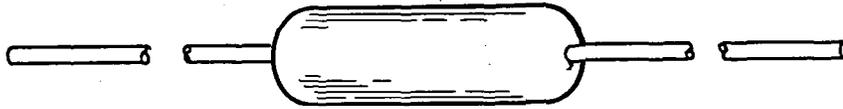

KS-16311 through KS-16315 Resistors
(KS-16312 Illustrated)



KS-14603I4, L5, & L6, KS-16311 through 16315, KS-16896,
KS-16764, KS-19077, & KS-19769 Resistors



KS-19238 Resistor

V

SPECIFIC CODE


▼ SPECIFIC CODE

DESCRIPTION

The 36-type resistors are precision wire wound on a spool having a brass core and phenol fiber spoolheads. They are mounted by a screw which passes through a $3/16$ inch diameter hole in the core. The spool is $7/8$ inch high and the diameter including the terminals is $1-3/8$ inches. The closest recommended mounting centers are $1-5/8$ inches by $1-5/8$ inches.

Most of the 36-type resistors are used to provide attenuation and those so used have attenuation and terminal impedances listed in the tables following. The figures listed in the table under "Fig. No." show the relative positions of the resistor windings and the terminal impedances.

The power rating for the entire resistor is 1.5 watts for continuous operation in an ambient of 100° F.

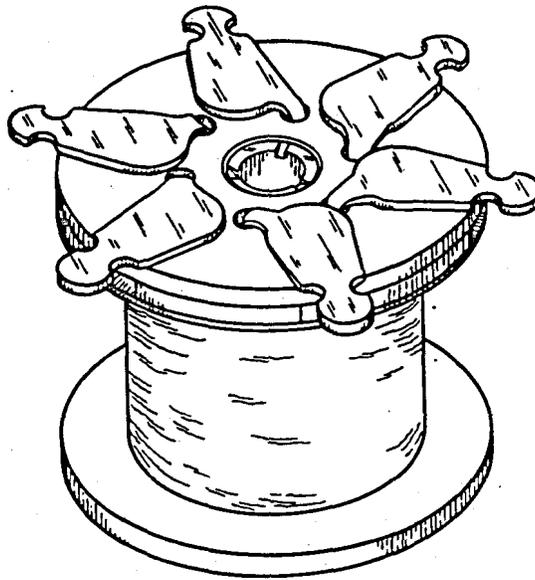

FOR SCHEMATIC FIGURES SEE PAGES V-4 and V-5.

36-TYPE RESISTORS


| Line No. | CODE NO. | FIG. NO. | TOL. % | NOMINAL RESISTANCE - OHMS | | | | |
|----------|----------|----------|--------|---------------------------|--------|----------|--------|-------|
| | | | | A | B | WINDINGS | | |
| | | | | | | C | D | E |
| 1 | 36F | 4.1 | 1 | 91.0 | 1071.0 | 91.0 | 1071.0 | |
| 2 | 36G | 4.1 | 1 | 213.0 | 577.0 | 213.0 | 577.0 | |
| 3 | 36H | 4.1 | 1 | 408.0 | 430.0 | 408.0 | 430.0 | |
| 4 | 36J | 4.1 | 1 | 742.0 | 367.0 | 742.0 | 367.0 | |
| 5 | 36K | 4.1 | 1 | 1330.0 | 336.0 | 1330.0 | 336.0 | |
| 6 | 36L | 4.1 | 1 | 70.0 | 5230.0 | 70.0 | 5230.0 | |
| 7 | 36M | 4.1 | 1 | 143.0 | 2665.0 | 143.0 | 2655.0 | |
| 8 | 36U | 1 | 1 | 5180.0 | 34.6 | 34.6 | | |
| 9 | 36W | 4.1 | 1 | 298.0 | 487.0 | 298.0 | 487.0 | |
| 10 | 36Y | 4.1 | 1 | 44.0 | 2099.0 | 44.0 | 2099.0 | |
| 11 | 36AA | 4.1 | 1 | 146.0 | 738.0 | 146.0 | 738.0 | |
| 12 | 36AR | 3.1 | 1 | 34.5 | 5200.0 | 34.5 | | |
| 13 | 36AS | 3.1 | 1 | 68.8 | 2583.0 | 68.8 | | |
| 14 | 36AT | 3.1 | 1 | 135.8 | 1258.0 | 135.8 | | |
| 15 | 36AU | 3.1 | 1 | 258.3 | 567.7 | 258.3 | | |
| 16 | 36AW | 3.1 | 1 | 435.8 | 195.0 | 435.8 | | |
| 17 | 36BY | 5 | 4 | 5516.0 | 36.6 | 36.6 | | |
| 18 | 36CA | 5 | 4 | 2917.0 | 77.7 | 77.7 | | |
| 19 | 36CB | 6 | 4 | 143.0 | 143.0 | 2652.0 | 2652.0 | |
| 20 | 36CC | 6 | 4 | 317.0 | 317.0 | 1394.0 | 1394.0 | |
| 21 | 36CE | 9 | 2 | 40000.0 | | | | |
| 22 | 36CG | 3.1 | 1 | 418.8 | 220.4 | 418.8 | | |
| 23 | 36CH | 4.1 | 1 | 553.5 | 392.4 | 553.5 | 392.4 | |
| 24 | 36CJ | 7.1 | 1 | 10.0 | 20.0 | 40.0 | 80.0 | 160.0 |
| 25 | 36CK | 7.2 | 1 | 50.0 | 100.0 | 200.0 | 400.0 | 800.0 |
| 26 | 36CL | 4.2 | 1 | 105.8 | 3506.0 | 105.8 | 3506.0 | |
| 27 | 36CM | 3.2 | Note 1 | 400.0 | 249.4 | 400.0 | | |
| 28 | 36CN | 3.2 | Note 1 | 466.0 | 153.4 | 466.0 | | |
| 29 | 36CP | 3.2 | Note 2 | 311.7 | 421.6 | 311.7 | | |
| 30 | 36CR | 2.1 | Note 3 | 190.2 | 190.2 | 282.9 | 190.2 | 190.2 |
| 31 | 36CS | 2.2 | 1 | 217.1 | 34.1 | 298.3 | 217.1 | 34.1 |
| 32 | 36CT | 2.3 | 1 | 241.1 | 81.5 | 156.0 | 241.1 | 81.5 |
| 33 | 36CU | 3.2 | 1 | 1372.0 | 1372.0 | 1855.0 | | |
| 34 | 36CW | 3.2 | 1 | 739.5 | 739.5 | 4342.0 | | |
| 35 | 36DA | 8 | 1 | 500.0 | 6500.0 | | | |
| 36 | 36DB | 7.3 | Note 4 | 0.15 | 0.30 | 0.60 | 1.20 | 2.40 |

NOTES:

1. Tolerance for windings A & C is $\pm 0.5\%$ and for winding B is $\pm 1\%$.
2. Tolerance for windings A & C is $\pm 1\%$ and for winding B is $\pm 0.5\%$.
3. Tolerance for windings A, B, D, & E is $\pm 0.5\%$ and for winding C is $\pm 0.25\%$.
4. Tolerance for winding A is $\pm 20\%$, winding B $\pm 10\%$, winding C $\pm 5\%$, winding D $\pm 2\%$, and winding E $\pm 1\%$.

36-TYPE RESISTORS

| ATTENUATION DB | TERMINAL IMPEDANCE OHMS | | CODE NO. | Line No. |
|-------------------|----------------------------|-----|-------------|-------------|
| | Z1 | Z2 | | |
| 5 | 300 | 300 | 36F | 1 |
| 10 | 300 | 300 | 36G | 2 |
| 15 | 300 | 300 | 36H | 3 |
| 20 | 300 | 300 | 36J | 4 |
| 25 | 300 | 300 | 36K | 5 |
| 2 | 600 | 600 | 36L | 6 |
| 4 | 600 | 600 | 36M | 7 |
| 1 | 600 | 600 | 36U | 8 |
| 12.5 | 300 | 300 | 36W | 9 |
| 2.5 | 300 | 300 | 36Y | 10 |
| 7.5 | 300 | 300 | 36AA | 11 |
| 1 | 600 | 600 | 36AR | 12 |
| 1 | 600 | 600 | 36AS | 13 |
| 4 | 600 | 600 | 36AT | 14 |
| 8 | 600 | 600 | 36AU | 15 |
| 16 | 600 | 600 | 36AW | 16 |
| 1 | 600 | 600 | 36BY | 17 |
| 2 | 600 | 600 | 36CA | 18 |
| 4 | 600 | 600 | 36CB | 19 |
| 8 | 600 | 600 | 36CC | 20 |
| - | - | - | 36CE | 21 |
| 15 | 600 | 600 | 36CG | 22 |
| 17.5 | 300 | 300 | 36CH | 23 |
| - | - | - | 36CJ | 24 |
| - | - | - | 36CK | 25 |
| 3 | 600 | 600 | 36CL | 26 |
| 14 | 600 | 600 | 36CM | 27 |
| 18 | 600 | 600 | 36CN | 28 |
| 10 | 600 | 600 | 36CP | 29 |
| 13 | 600 | 600 | 36CR | 30 |
| 10 | 600 | 300 | 36CS | 31 |
| 15 | 600 | 300 | 36CT | 32 |
| - | - | - | 36CU | 33 |
| - | - | - | 36CW | 34 |
| - | - | - | 36DA | 35 |
| - | - | - | 36DB | 36 |

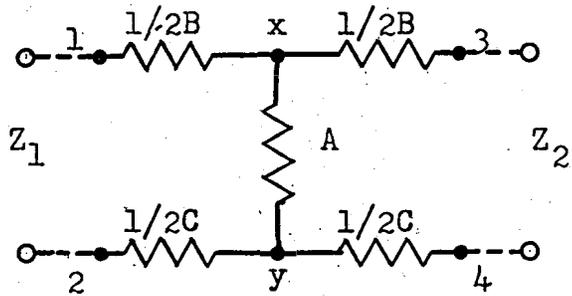

Windings A, B, and C are Bi-filar wound. A connected to midpoints of B and C at insulated splices x and y.

FIG. 1

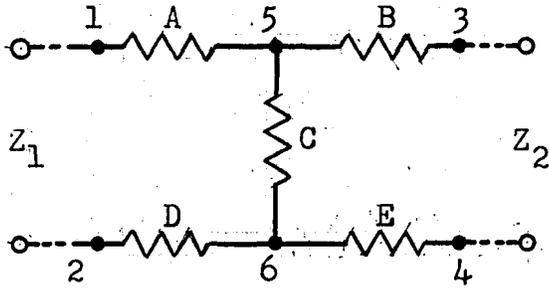


FIG. 2.1 FIG. 2.2 FIG. 2.3

| | | | |
|--------|----|-----|-----|
| Wdg. A | RL | RL | RL |
| Wdg. B | RL | Bif | Bif |
| Wdg. C | RL | RL | Bif |
| Wdg. D | RL | RL | RL |
| Wdg. E | RL | Bif | Bif |

FIGS. 2.1, 2.2, 2.3

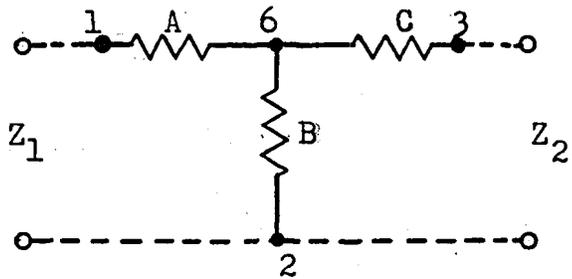


FIG. 3.1 FIG. 3.2

| | | |
|--------|-----|----|
| Wdg. A | Bif | RL |
| Wdg. B | Bif | RL |
| Wdg. C | Bif | RL |

FIGS. 3.1, 3.2

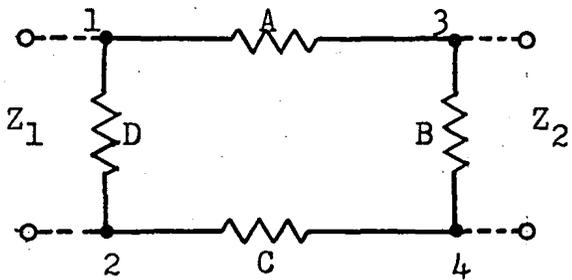


FIG. 4.1


Wdgs. A & C are a parallel pair
Wdgs. B & D are a parallel pair

FIG. 4.2

Wdg. A Bifilar
Wdg. B Reverse Layer
Wdg. C Bifilar
Wdg. D Reverse Layer


FIGS. 4.1, 4.2

RL=Reverse Layer Bif=Bifilar Ind= Inductive

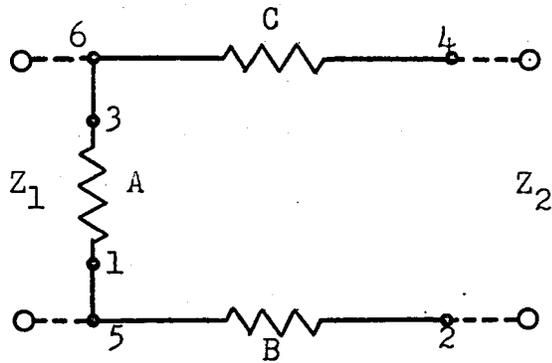

Wdg. A Bifilar
Wdg. B Bifilar
Wdg. C Bifilar

FIG. 5

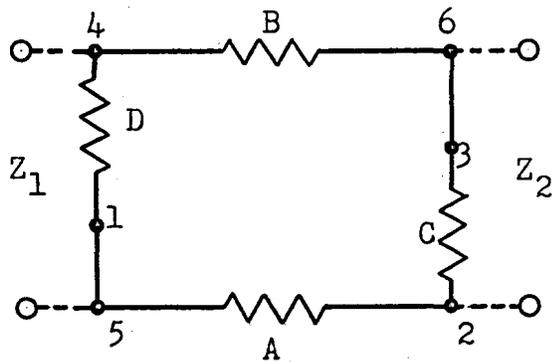

Wdg. A Bifilar
Wdg. B Bifilar
Wdg. C Bifilar
Wdg. D Bifilar

FIG. 6


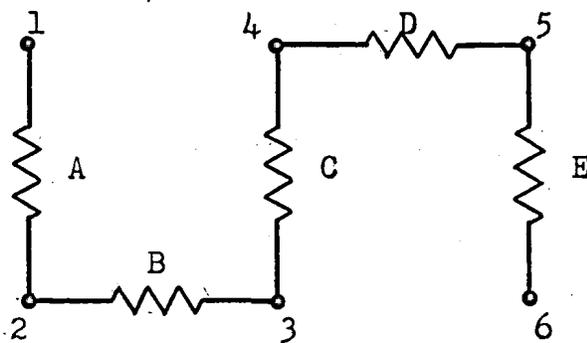


FIG. 7.1 FIG. 7.2 FIG. 7.3

| | | | |
|--------|-----|-----|-----|
| Wdg. A | Bif | Bif | Ind |
| Wdg. B | Bif | Bif | Ind |
| Wdg. C | Bif | Bif | Ind |
| Wdg. D | Bif | RL | Ind |
| Wdg. E | Bif | RL | Ind |

FIGS. 7.1, 7.2, & 7.3



Wdg. A Bifilar
Wdg. B Bifilar

FIG. 8



Wdg. A Bifilar


FIG. 9

DESCRIPTION

The 40-type resistors are wound non-inductively on an iron core of the punched flat type similar to that of the "E" type relays. They mount interchangeably with the "E" type relays. These resistors are 1-3/8 inch wide and 11/16 inch thick, 3-15/64 inch high from mounting surface to top. Their terminals extend 3/4 inch beyond the mounting surface. The resistors mount on 1-3/4 inch vertical centers and on horizontal centers as shown in the following tables.

The resistance tolerances are $\pm 5\%$ except as shown otherwise in the tables.

The power rating of the entire resistor is 4.6 watts.

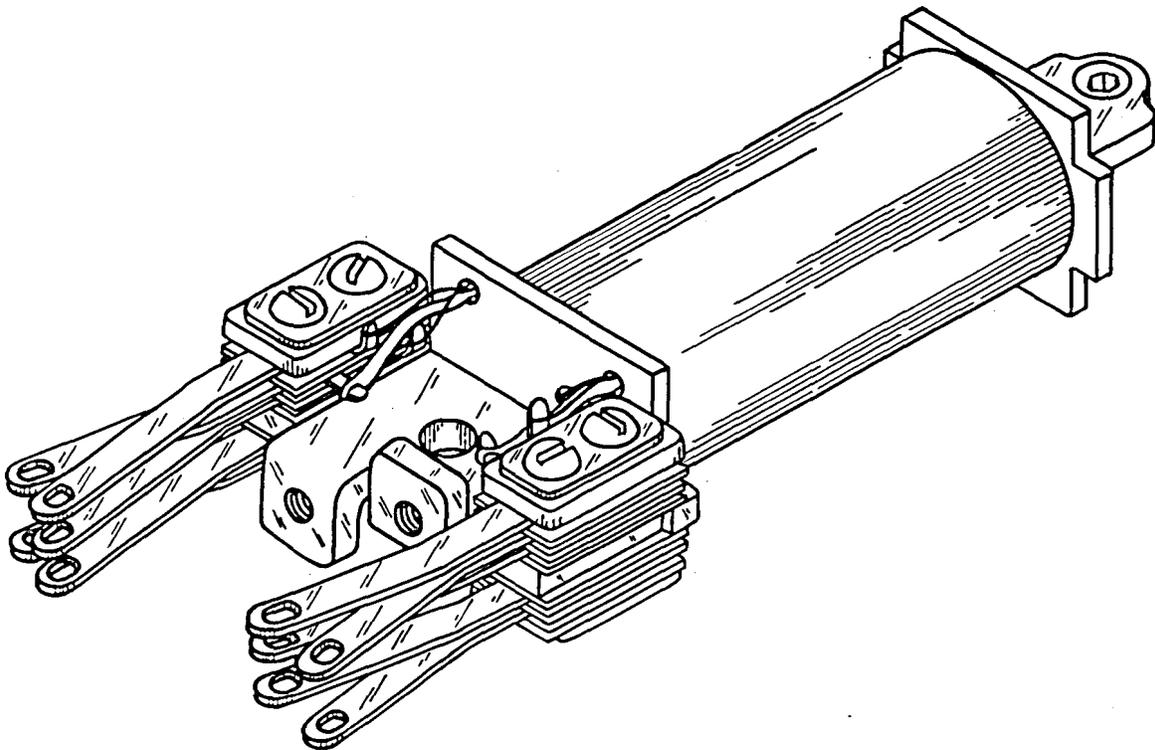

40-TYPE RESISTORS




FIG. 1




FIG. 2

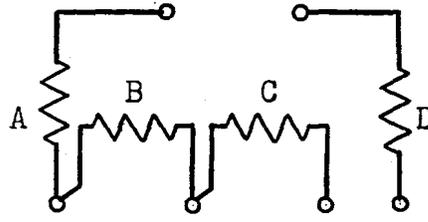


FIG. 3

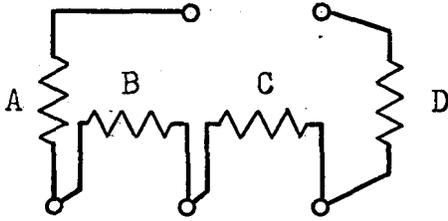


FIG. 4




FIG. 6

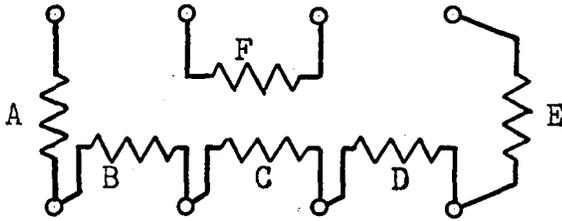


FIG. 7

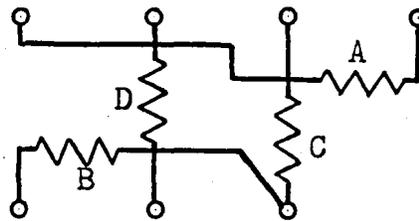


FIG. 8

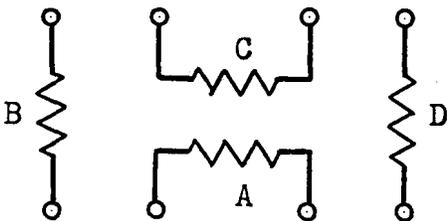


FIG. 9

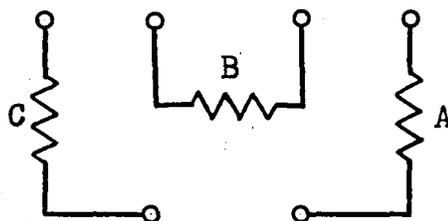


FIG. 10

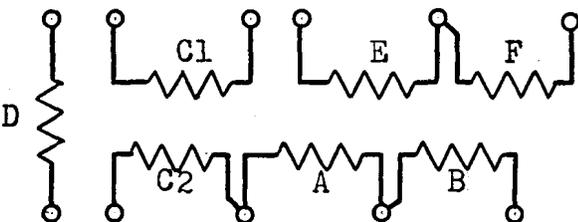


FIG. 11

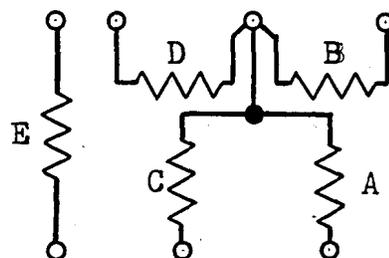


FIG. 12

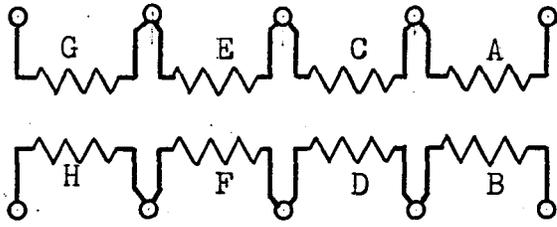


FIG. 14

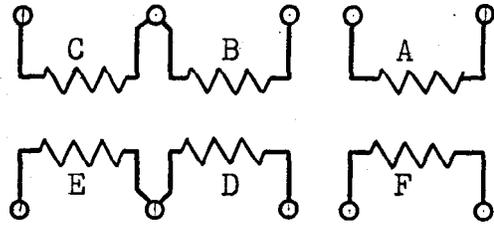


FIG. 15

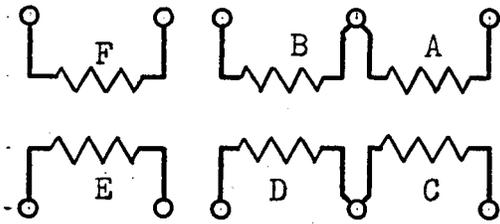


FIG. 16

40-TYPE RESISTORS

| Line No. | CODE NO. | FIG. NO. | RESISTANCE - OHMS, IN WINDINGS | | | | | | | | HORIZ CTRS. |
|----------|----------|----------|--------------------------------|--------|-------|--------|------|------|---|---|-------------|
| | | | A | B | C | D | E | F | G | H | |
| 1 | 40A | 1 | 21000 | | | | | | | | 3/4 |
| 2 | 40B | 1 | 7600 | | | | | | | | 3/4 |
| 3 | 40D | 1 | 17500 | | | | | | | | 3/4 |
| 4 | 40H | 1 | 24000 | | | | | | | | 3/4 |
| 5 | 40J | 1 | 12000 | | | | | | | | 3/4 |
| 6 | 40K | 1 | *14500 | | | | | | | | 3/4 |
| 7 | 40L | 1 | 6500 | | | | | | | | 3/4 |
| 8 | 40M | 1 | 10000 | | | | | | | | 3/4 |
| 9 | 40N | 1 | * 7000 | | | | | | | | 3/4 |
| 10 | 40P | 1 | * 6200 | | | | | | | | 3/4 |
| 11 | 40R | 2 | 3500 | 3000 | | | | | | | 3/4 |
| 12 | 40S | 1 | 500 | | | | | | | | 3/4 |
| 13 | 40T | 2 | 100 | 100 | | | | | | | 3/4 |
| 14 | 40U | 2 | 10 | 10 | | | | | | | 3/4 |
| 15 | 40W | 2 | * 3000 | * 2500 | | | | | | | 3/4 |
| 16 | 40Y | 2 | * 4000 | * 7000 | | | | | | | 3/4 |
| 17 | 40AB | 1 | **22000 | | | | | | | | 3/4 |
| 18 | 40AD | 1 | * 5000 | | | | | | | | 3/4 |
| 19 | 40AE | 2 | * 1000 | *13500 | | | | | | | 3/4 |
| 20 | 40AF | 1 | 3500 | | | | | | | | 3/4 |
| 21 | 40AG | 2 | 6000 | 15000 | | | | | | | 3/4 |
| 22 | 40AH | 1 | 13000 | | | | | | | | 3/4 |
| 23 | 40AJ | 1 | 8000 | | | | | | | | 3/4 |
| 24 | 40AK | 1 | 1000 | | | | | | | | 3/4 |
| 25 | 40AL | 1 | *15000 | | | | | | | | 3/4 |
| 26 | 40AM | 1 | * 8000 | | | | | | | | 3/4 |
| 27 | 40AN | 1 | *10000 | | | | | | | | 3/4 |
| 28 | 40AP | 1 | *20000 | | | | | | | | 3/4 |
| 29 | 40AS | 2 | * 5000 | * 5000 | | | | | | | 3/4 |
| 30 | 40AT | 2 | 2000 | 11000 | | | | | | | 3/4 |
| 31 | 40AU | 2 | * 2060 | * 8400 | | | | | | | 3/4 |
| 32 | 40AW | 1 | 13500 | | | | | | | | 3/4 |
| 33 | 40AY | 1 | 2000 | | | | | | | | 3/4 |
| 34 | 40BA | 1 | 50 | | | | | | | | 3/4 |
| 35 | 40BB | 2 | * 1654 | * 6117 | | | | | | | 3/4 |
| 36 | 40BC | 3 | * 4797 | * 511 | *3562 | * 1534 | | | | | 3/4 |
| 37 | 40BD | 4 | * 173 | * 1941 | *1087 | * 422 | | | | | 3/4 |
| 38 | 40BE | 2 | * 8674 | * 3579 | | | | | | | 3/4 |
| 39 | 40BG | 4 | * 1174 | * 447 | * 64 | * 1488 | | | | | 3/4 |
| 40 | 40BH | 6 | *11000 | *11000 | | | | | | | 3/4 |
| 41 | 40BK | 2 | *20000 | *20000 | | | | | | | 3/4 |
| 42 | 40BL | 7 | * 450 | * 1300 | * 600 | * 1150 | *150 | 1200 | | | 3/4 |
| 43 | 40BN | 2 | 30 | 40 | | | | | | | 3/4 |
| 44 | 40BP | 8 | 6500 | * 580 | 5920 | *14500 | | | | | 3/4 |
| 45 | 40BR | 6 | * 9000 | * 9000 | | | | | | | 3/4 |

* - Plus or minus 1%

** - Plus 1%, minus 0%

40-TYPE RESISTORS.

| Line No. | CODE NO. | FIG NO. | RESISTANCE - OHMS, IN WINDINGS | | | | | | | | HORIZ CTRS. | |
|----------|----------|---------|--------------------------------|--------|--------|--------|-----|-----|-----|-----|-------------|-----|
| | | | A | B | C | D | E | F | G | H | | |
| 1 | 4OBS | 1 * | 3 | | | | | | | | | 3/4 |
| 2 | 4OBT | 1 | 300 | | | | | | | | | 3/4 |
| 3 | 4OBU | 9 | *1000 | * 1000 | *11000 | *11000 | | | | | | 3/4 |
| 4 | 4OBW | 9 | 9000 | 9000 | 600 | 600 | | | | | | 3/4 |
| 5 | 4OBY | 9 | *1000 | * 1000 | *20000 | *20000 | | | | | | 3/4 |
| 6 | 4OCA | 10 * | 220 | * 1410 | *10250 | | | | | | | 3/4 |
| 7 | 4OCB | 11 | 180 | 180 | (C1)50 | 8600 | 200 | 100 | | | | 7/8 |
| | | | | | (C2)50 | | | | | | | |
| 9 | 4OCC | 2 | *15000 | *15000 | | | | | | | | 3/4 |
| 10 | 4OCD | 2 | 300 | 2000 | | | | | | | | 3/4 |
| 11 | 4OCE | 2 | 300 | 500 | | | | | | | | 3/4 |
| 12 | 4OCF | 12 | 5000 | 5000 | 600 | 600 | 425 | | | | | 3/4 |
| 13 | 4OCG | 8 | 600 | 2000 | 3000 | 300 | | | | | | 3/4 |
| 14 | 4OCJ | 14 | 100 | 100 | 200 | 200 | 400 | 400 | 800 | 800 | | 7/8 |
| 15 | 4OCK | 15 | 830 | 300 | 30 | 30 | 300 | 500 | | | | 7/8 |
| 16 | 4OCL | 16 | 330 | 330 | 330 | 330 | 500 | 500 | | | | 7/8 |

* - Plus or minus 1%


** - Plus 1%, minus 0%

DESCRIPTION

Non-inductive resistors wound on a spool. The power rating is 1 watt in free air and 2 watts when mounted singly on metal plates in an ambient of 150° F. The corresponding ratings for trouble conditions are 2 and 4 watts respectively. The maximum continuous operating temperature of the resistor surface is 250° F.

Can be mounted on No. 930- or similar type mounting plates or in the drillings for No. 221- or similar type relays. Can also be mounted in a separate drilling by means of a screw which passes through the core of the resistor. The screw is furnished with the mounting plate and can be obtained of sufficient length to mount either 1, 2, 3, or 4 resistors, one over the other in the same plate position.

The closest recommended mounting centers are 1-1/8 inch by 1-1/8 inch.

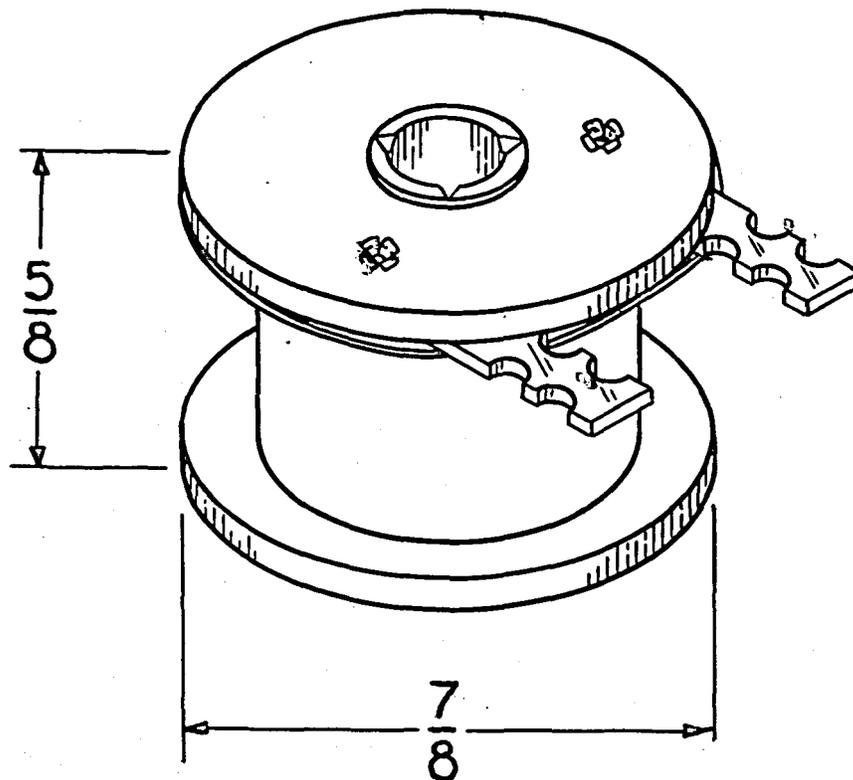

63-TYPE RESISTORS

BIFILAR WINDINGS

| Line No. | CODE NO. | NOMINAL | | Line No. | CODE NO. | NOMINAL | |
|----------|----------|-----------------|-------------|----------|----------|-----------------|-------------|
| | | RESISTANCE OHMS | TOLERANCE % | | | RESISTANCE OHMS | TOLERANCE % |
| 1 | 63BU | 3.0 | 5 | 46 | 63S | 1400.0 | 1 |
| 2 | 63EF | 7.36 | 1 | 47 | 63BH | 1420.0 | 1 |
| 3 | 63DP | 10.0 | 1 | 48 | 63CW | 1500.0 | 1 |
| 4 | 63A | 15.0 | 5 | 49 | 63DB | 1750.0 | 1 |
| 5 | 63B | 20.0 | 5 | 50 | 63CM | 2000.0 | 1 |
| 6 | 63ES | 23.1 | 2 | 51 | 63T | 2000.0 | 5 |
| 7 | 63C | 50.0 | 5 | 52 | 63DA | 2100.0 | 1 |
| 8 | 63FJ | 62.6 | 2 | 53 | 63U | 2300.0 | 5 |
| 9 | 63DU | 68.0 | 1 | 54 | 63CY | 2500.0 | 1 |
| 10 | 63FK | 75.0 | ±2 ohms | 55 | 63AP | 2500.0 | 5 |
| 11 | 63D | 100.0 | 5 | 56 | 63CK | 2600.0 | 1 |
| 12 | 63E | 150.0 | 5 | 57 | 63BJ | 2660.0 | 1 |
| 13 | 63DW | 168.0 | 1 | 58 | 63AD | 3000.0 | 1 |
| 14 | 63CR | 190.0 | 1 | 59 | 63W | 3000.0 | 5 |
| 15 | 63F | 200.0 | 5 | 60 | 63CN | 3250.0 | 1 |
| 16 | 63BN | 210.0 | 1 | 61 | 63DL | 3300.0 | 1 |
| 17 | 63CL | 230.0 | 1 | 62 | 63DK | 3500.0 | 1 |
| 18 | 63G | 250.0 | 5 | 63 | 63CS | 3575.0 | 1 |
| 19 | 63AL | 265.0 | 1 | 64 | 63DJ | 3630.0 | 1 |
| 20 | *63FD | 280.0 | 5 | 65 | 63DG | 3700.0 | 1 |
| 21 | 63AN | 295.0 | 1 | 66 | 63AC | 4000.0 | 5 |
| 22 | 63H | 300.0 | 5 | 67 | 63DM | 4250.0 | 1 |
| 23 | 63J | 350.0 | 5 | 68 | 63CH | 4450.0 | 1 |
| 24 | 63K | 400.0 | 5 | 69 | 63FG | 5000.0 | 0.5 |
| 25 | 63FL | 430.0 | 1 | 70 | 63DN | 5000.0 | 1 |
| 26 | 63L | 500.0 | 5 | 71 | 63Y | 5000.0 | 5 |
| 27 | 63AK | 600.0 | 5 | 72 | 63CU | 5250.0 | 1 |
| 28 | 63CP | 700.0 | 1 | 73 | 63FF | 5610.0 | 1 |
| 29 | 63CJ | 725.0 | 1 | 74 | 63AH | 8100.0 | 5 |
| 30 | 63M | 750.0 | 5 | 75 | 63DT | 10000.0 | 1 |
| 31 | 63N | 800.0 | 5 | 76 | 63AB | 10000.0 | 5 |
| 32 | 63DE | 875.0 | 1 | 77 | 63CT | 13500.0 | 1 |
| 33 | 63AG | 900.0 | 1 | | | | |
| 34 | 63AM | 950.0 | 5 | | | | |
| 35 | 63FH | 1000.0 Min | - | | | | |
| 36 | 63DH | 1000.0 | 1 | | | | |
| 37 | 63P | 1000.0 | 5 | | | | |
| 38 | 63DF | 1034.0 | 1 | | | | |
| 39 | 63BT | 1080.0 | 1 | | | | |
| 40 | 63AA | 1150.0 | 5 | | | | |
| 41 | 63AE | 1200.0 | 1 | | | | |
| 42 | 63R | 1200.0 | 5 | | | | |
| 43 | 63AF | 1230.0 | 1 | | | | |
| 44 | 63DC | 1275.0 | 1 | | | | |
| 45 | 63BK | 1300.0 | 1 | | | | |

*Equipped with flexible leads
9-1/2 inches long, provided
with No. 72 cord tips.

REVERSE LAYER WINDINGS

| Line No. | CODE NO. | NOMINAL | TOLERANCE |
|-------------|-------------|--------------------|-----------|
| | | RESISTANCE OHMS | % |
| 1 | 63DY | 312.0 | 1 |
| 2 | *63EP | 680.0 | 5 |
| 3 | 63EN | 1000.0 | 2 |
| 4 | 63EA | 1155.0 | 1 |
| 5 | 63CE | 1634.0 | 2 |
| 6 | 63EB | 2140.0 | 1 |
| 7 | 63BF | 2218.0 | 0.5 |
| 8 | 63BB | 2950.0 | 0.6 |
| 9 | 63EW | 5525.0 | 1 |
| 10 | 63EJ | 6700.0 | 1 |
| 11 | 63EK | 8000.0 | 1 |
| 12 | 63EC | 15700.00 | 1 |
| 13 | 63FE | 21300.00 | 1 |


* Has a relatively high temperature coefficient of resistance.

DESCRIPTION

These are spool type resistors, non-inductively wound in the manner indicated in the tables. Where space permits, these resistors are recommended in place of the 64- and 65-type resistors. For minimum phase angle, use bifilar wound resistors between 1 and 200 ohms and reverse layer wound resistors above 200 ohms.

Mount on $7/8$ inch vertical centers and $7/16$ inch horizontal centers.

The power rating is 1 watt in an ambient of 150° F. For each degree F that the ambient exceeds 150° F, the power rating shall decrease 1%.

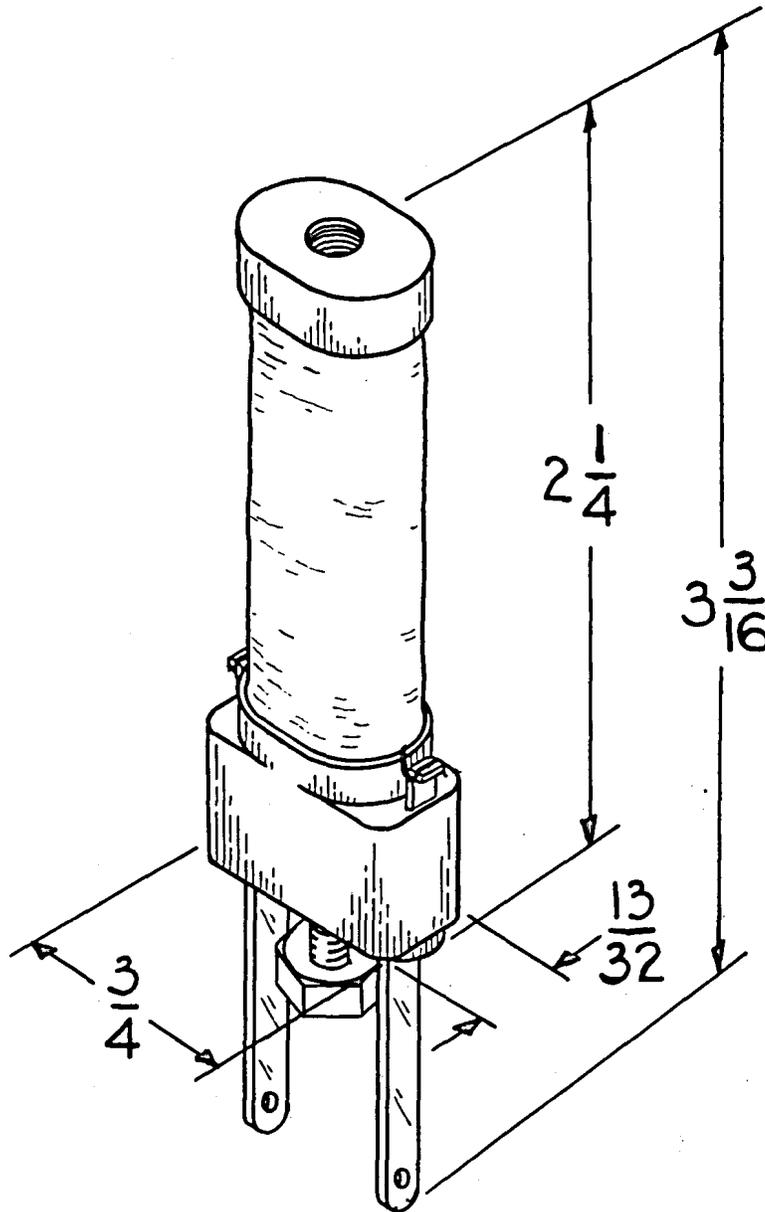

80-TYPE RESISTORS

BIFILAR WINDINGS

| Line No. | CODE NO. | NOMINAL RESISTANCE | TOLERANCE | Line No. | CODE NO. | NOMINAL RESISTANCE | TOLERANCE |
|----------|----------|--------------------|-----------|----------|----------|--------------------|-----------|
| | | OHMS | ±% | | | OHMS | ±% |
| 1 | 80CH | 0.5 | 5 | | | | |
| 2 | 80CJ | 1.0 | 5 | | | | |
| 3 | 80CK | 2.0 | 5 | | | | |
| 4 | 80AN | 2.5 | 2 | | | | |
| 5 | 80CS | 4.0 | 3 | | | | |
| 6 | 80CL | 4.0 | 5 | | | | |
| 7 | 80CW | 5.0 | 1 | | | | |
| 8 | 80CT | 8.0 | 2 | | | | |
| 9 | 80CM | 8.0 | 5 | | | | |
| 10 | 80CY | 10.0 | 1 | | | | |
| 11 | 80AT | 15.0 | 0.25 | | | | |
| 12 | 80DA | 20.0 | 1 | | | | |
| 13 | 80CP | 24.0 | 5 | | | | |
| 14 | 80DB | 40.0 | 1 | | | | |
| 15 | 80DC | 80.0 | 1 | | | | |
| 16 | 80D | 84.04 | 0.1 | | | | |
| 17 | 80DD | 100.0 | 1 | | | | |
| 18 | 80AD | 129.2 | 0.1 | | | | |
| 19 | 80E | 138.1 | 0.1 | | | | |
| 20 | 80AE | 150.0 | 0.1 | | | | |
| 21 | 80AF | 153.5 | 0.1 | | | | |
| 22 | 80F | 155.8 | 0.1 | | | | |
| 23 | 80BB | 213.0 | 1 | | | | |
| 24 | 80BD | 225.0 | 1 | | | | |
| 25 | 80BE | 239.0 | 1 | | | | |
| 26 | 80BF | 253.0 | 1 | | | | |
| 27 | 80BG | 267.0 | 1 | | | | |
| 28 | 80BH | 283.0 | 1 | | | | |
| 29 | 80BL | 317.0 | 1 | | | | |
| 30 | 80BM | 335.0 | 1 | | | | |
| 31 | 80BN | 354.0 | 1 | | | | |
| 32 | 80BP | 371.0 | 1 | | | | |
| 33 | 80BR | 394.0 | 1 | | | | |
| 34 | 80BS | 419.0 | 1 | | | | |
| 35 | 80BT | 444.0 | 1 | | | | |
| 36 | 80BU | 471.0 | 1 | | | | |
| 37 | 80BY | 529.0 | 1 | | | | |
| 38 | 80BC | 550.0 | 1 | | | | |
| 39 | 80CA | 560.0 | 1 | | | | |
| 40 | 80CB | 592.0 | 1 | | | | |
| 41 | 80CC | 625.0 | 1 | | | | |
| 42 | 80BK | 805.0 | 1 | | | | |
| 43 | 80AY | 3000.0 | 1 | | | | |
| 44 | 80DJ | 3000.0 | 5 | | | | |
| 45 | 80BA | 3550.0 | 1 | | | | |

REVERSE LAYER WINDINGS

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE ±% |
|-------------|-------------|-------------------------------|-----------------|
| 1 | 80G | 209.4 | 0.1 |
| 2 | 80AG | 225.0 | 0.1 |
| 3 | 80L | 300.0 | 0.1 |
| 4 | 80DG | 350.0 | 1 |
| 5 | 80DH | 400.0 | 1 |
| 6 | 80AJ | 567.7 | 0.1 |
| 7 | 80AK | 600.0 | 0.1 |
| 8 | 80CN | 1200.0 | 5 |
| 9 | 80R | 1681.0 | 0.1 |
| 10 | 80S | 2204.0 | 0.1 |
| 11 | 80A | 2580.0 | 1 |
| 12 | 80T | 3117.0 | 0.1 |
| 13 | 80W | 4216.0 | 0.1 |
| 14 | 80Y | 5632.0 | 0.5 |
| 15 | 80AA | 6000.0 | 0.5 |
| 16 | 80AC | 9869.0 | 0.5 |

DESCRIPTION


These are spool type resistors, inductively wound.

They mount on 1 inch vertical centers and 5/8 inch horizontal centers.

The power rating is 1 watt in an ambient of 150° F. For each degree F that the ambient exceeds 150° F, the power rating shall decrease 1%.

Resistance values are held within limits of ±1%.

| CODE NO. | NOMINAL RESISTANCE OHMS |
|-------------|-------------------------------|
| 105A | 120000 |
| 105B | 78000 |

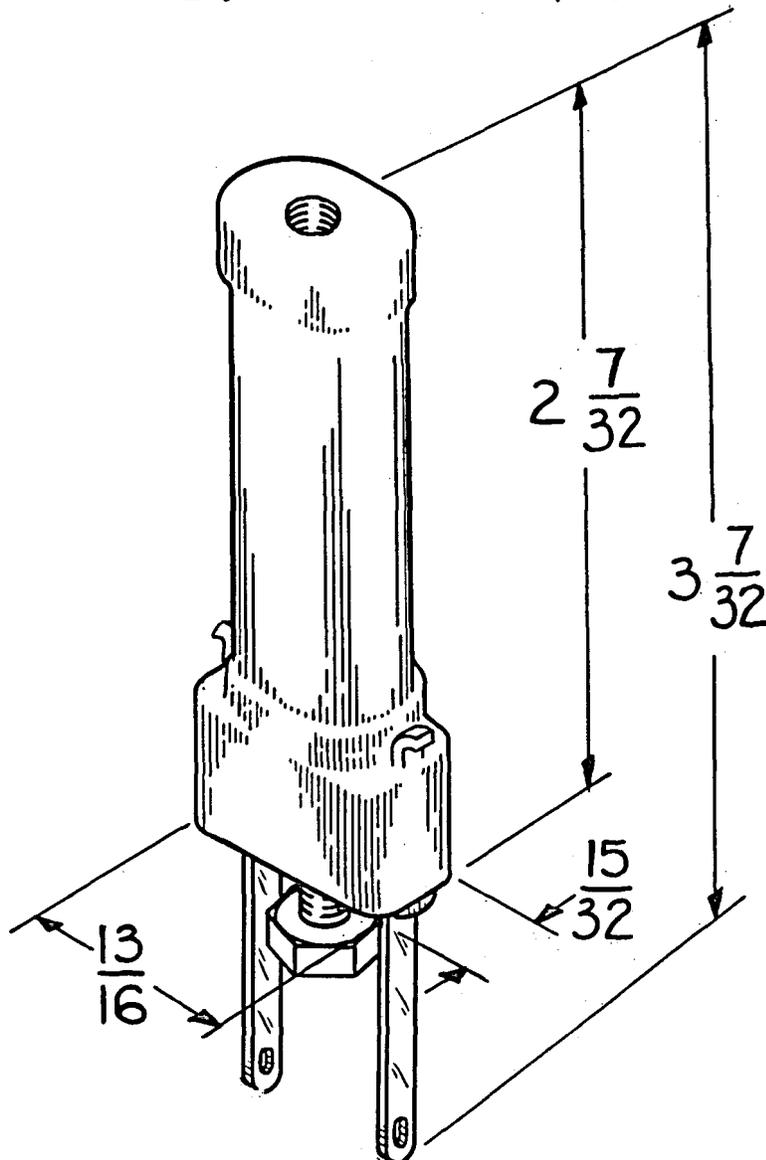

DESCRIPTION

These resistors are wound on a phenol plastic spool having four terminals. The end terminals are bent to facilitate connection to bus bars to provide voltages as required by individual circuits. Several types of windings are used as indicated in the table headings on the following pages, to minimize inductance and capacitance in the windings to the degree required by circuit applications.

The dimensions vary depending upon the fullness of the windings, as indicated in the tables under the column headings "Fig. No." and "Dimension D".

The power rating of the resistor at an ambient of 77° F is 1 watt total for windings A and B and 1-1/4 watts total for windings A, B, and C. Trouble ratings are double the normal rating.

These resistors are used in supply circuits in Type J, K, and L Carrier Telephone Systems.

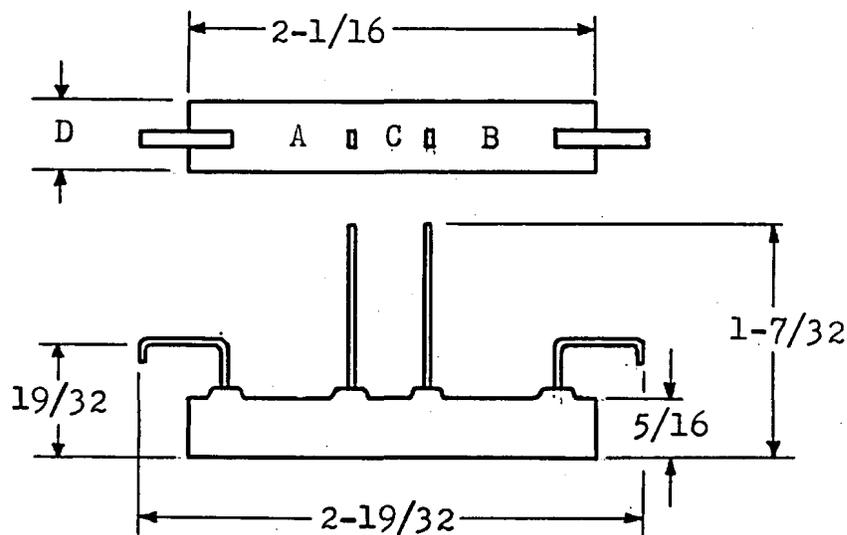


FIG. 1

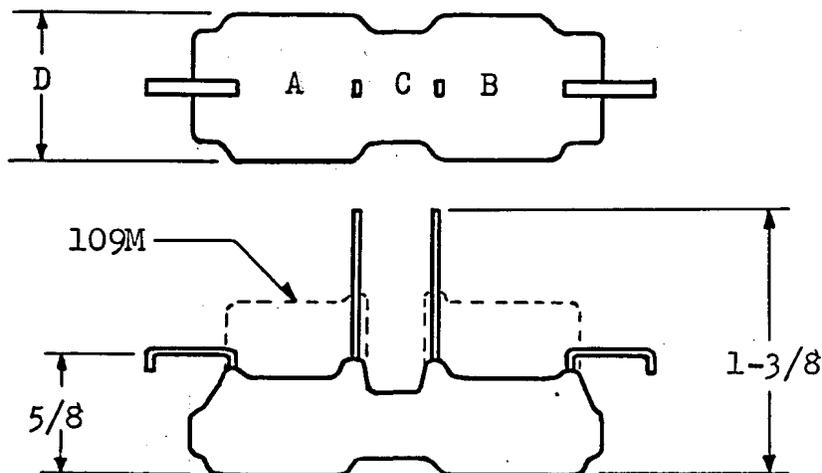


FIG. 2

109-TYPE RESISTORS

TWO BIFILAR WINDING RESISTORS
 TWO TERMINALS PER WINDING

| Line No. | CODE NO. | FIG NO. | DIM D | WINDING A | | WINDING B | |
|----------|----------|---------|-------|-------------------------|-------------|-------------------------|-------------|
| | | | | NOMINAL RESISTANCE OHMS | TOLERANCE % | NOMINAL RESISTANCE OHMS | TOLERANCE % |
| 1 | 109L | 1 | 3/8 | 30.0 | 5 | 30.0 | 5 |
| 2 | 109S | 1 | 3/8 | 60.0 | 5 | 60.0 | 5 |
| 3 | 109T | 1 | 3/8 | 2.0 | 5 | 2.0 | 5 |
| 4 | 109Y | 1 | 3/8 | 15.0 | 5 | 15.0 | 5 |

TWO NON-INDUCTIVE (TAPE) WINDING RESISTORS
 TWO TERMINALS PER WINDING

| | | | | | | | |
|----|-------|---|-----|------|---|------|---|
| 14 | 109P | 2 | 3/4 | 1750 | 1 | 1750 | 1 |
| 15 | 109AA | 2 | 3/4 | 760 | 1 | 760 | 1 |
| 16 | 109AB | 2 | 3/4 | 250 | 5 | 250 | 5 |

TWO INDUCTIVE WINDING RESISTORS
 TWO TERMINALS PER WINDING

| | | | | | | | |
|----|------|---|-----|-------|---|-------|---|
| 27 | 109A | 1 | 3/8 | 2.50 | 5 | 2.50 | 5 |
| 28 | 109B | 1 | 3/8 | 6.75 | 5 | 6.75 | 5 |
| 29 | 109C | 1 | 3/8 | 9.25 | 5 | 9.25 | 5 |
| 30 | 109D | 1 | 3/8 | 12.00 | 5 | 12.00 | 5 |
| 31 | 109E | 1 | 3/8 | 13.50 | 5 | 13.50 | 5 |
| 32 | 109F | 1 | 3/8 | 22.00 | 5 | 22.00 | 5 |
| 33 | 109G | 1 | 3/8 | 27.00 | 5 | 27.00 | 5 |
| 34 | 109H | 1 | 3/8 | 63.00 | 5 | 63.00 | 5 |

TWO NON-INDUCTIVE (TAPE) WINDING RESISTORS AND
ONE BIFILAR WINDING CONNECTED IN SERIES. INNER
TERMINALS COMMON TO ADJACENT WINDINGS.

| Line No. | CODE NO. | FIG NO. | DIM D | WINDING A | | WINDING B | | WINDING C | |
|-------------|-------------|------------|----------|-------------------------------|----------|-------------------------------|----------|-------------------------------|----------|
| | | | | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL RESISTANCE OHMS | TOL % |
| 1 | 109R | 2 | 5/8 | 850 | 1 | 850 | 1 | 135 | .75 |
| 2 | 109M | 2 | 1/2 | 1000 | 1 | 1000 | 1 | 135 | .75 |
| 3 | 109N | 2 | 3/4 | 1750 | 1 | 1750 | 1 | 135 | .75 |

NOTE: Windings A and B have Non-Inductive (Tape) windings and
Winding C has Bifilar winding. Windings A, B, and C are
connected in series.


THREE BIFILAR WINDING RESISTORS CONNECTED
IN SERIES. INNER TERMINALS COMMON TO
ADJACENT WINDINGS

| | | | | | | | | | |
|----|------|---|-----|-----|-----|-----|-----|-----|------|
| 20 | 109W | 1 | 3/8 | 162 | 0.5 | 162 | 0.5 | 225 | 0.5 |
| 21 | 109U | 1 | 1/2 | 280 | 5 | 280 | 5 | 135 | 0.75 |

DESCRIPTION

These resistors are wound on steatite cores having four winding sections and are equipped with 6 inch flexible leads. They are used as components of filters, equalizers, and networks. They have inductive or non-inductive windings as indicated in the following tables. The non-inductive resistors have bifilar or reverse layer windings. The winding arrangements are shown in the circuit diagrams in which the letters "A", "B", "C", and "D" are designations of windings most of which have only one external lead connection.

The body dimensions are 1 inch long by 1/2 inch diameter. The resistor has a 1/8 inch diameter hole in the core for mounting.

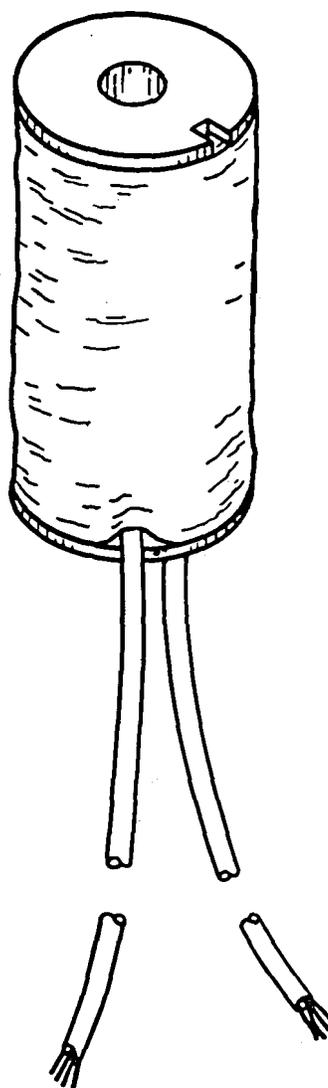

101-TYPE RESISTORS

SINGLE REVERSE SECTION WINDING
RESISTOR WITH TWO LEADS

| <u>Line No.</u> | <u>CODE NO.</u> | <u>NOMINAL RESISTANCE OHMS</u> | <u>TOLERANCE %</u> |
|---------------------|---------------------|--|------------------------|
| 1 | 101AP | 400 | 0.5 |
| 2 | 101ED | 1053 | 0.1 |
| 3 | 101BA | 2000 | 0.5 |

SINGLE BIFILAR WINDING WITH TWO LEADS

| <u>Line No.</u> | <u>CODE NO.</u> | <u>NOMINAL RESISTANCE OHMS</u> | <u>TOLERANCE %</u> |
|---------------------|---------------------|--|------------------------|
| 30 | 101EJ | 90 | 1 |
| 31 | 101EK | 412 | 1 |
| 32 | 101EL | 600 | 1 |
| 33 | 101EH | 766 | 2 |

TWO BIFILAR WINDING RESISTORS WITH FOUR LEADS

| Line No. | CODE NO. | WINDING A | | WINDING B | |
|-------------|-------------|-------------------------------|----------------|-------------------------------|----------------|
| | | NOMINAL RESISTANCE OHMS | TOLERANCE % | NOMINAL RESISTANCE OHMS | TOLERANCE % |
| 1 | 101DP | 53 | 0.5 | 53 | 0.5 |

THREE BIFILAR WINDING RESISTORS
WITH THREE LEADS

| | | | | | |
|----|-------|-------|-----|--------|-----|
| 15 | 101EC | 32.04 | 0.5 | 495.52 | 0.5 |
| 16 | 101DY | 42.76 | 0.5 | 376.18 | 0.5 |
| 17 | 101EB | 50.00 | 0.5 | 325.00 | 0.5 |
| 18 | 101EA | 56.56 | 0.5 | 290.38 | 0.5 |

THREE BIFILAR WINDING RESISTORS
WITH THREE LEADS

| Line No. | CODE NO. | ACROSS WHITE & WHITE LEADS WINDING A | | ACROSS RED & WHITE LEADS WINDING B | |
|-------------|-------------|--|----------|--|----------|
| | | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL RESISTANCE OHMS | TOL % |
| 40 | 101EF | 35.20 | 0.5 | 119.70 | 0.5 |
| 41 | 101EG | 95.24 | 0.5 | 968.82 | 0.5 |

101-TYPE RESISTORS

FOUR WINDING RESISTORS
(THREE BIFILAR AND ONE INDUCTIVE)
WITH FOUR LEADS


| CODE NO. | NOMINAL RESISTANCE-OHMS | TOLERANCE % |
|-------------|-------------------------|----------------|
| 101EE | Between | |
| | Blue and Yellow leads | 5156.20 0.5 |
| | Yellow and Red leads | 288.85 0.5 |
| | Yellow and White leads | 56.90 0.5 |
| | White and Red leads | 288.85 0.5 |

DESCRIPTION

These resistors are wound in multi-section ceramic spools and are covered with textile insulation. The 102-type resistors have flexible lead wires which vary in length from code to code. The 104-type resistors have flexible leads of minimum 6 inches in length. The 115-type resistors have three solid tinned lead wires extending from the "Winding B" end of the spool, located within a 180° arc. With the middle terminal of the 115-type uppermost, Winding A is connected to the right hand and middle terminals and Winding B is connected to the left hand and middle terminals.

These resistors are used as components in potentiometers, filters, equalizers, networks, transformers and repeaters in carrier telephone systems.

The resistors are approximately 1-3/4 inches long by 1/2 inch to 9/16 inch diameter depending on fullness of winding and insulation. The 104- and 115-type resistors have a hole through the center of the spool which will clear a 0.101 inch rod, and the hole has a .138-32 thread 3/16 inch deep at one end for mounting. Other means of mounting must be provided for the 102-type resistors which are completely covered with insulation and asphalt compound.

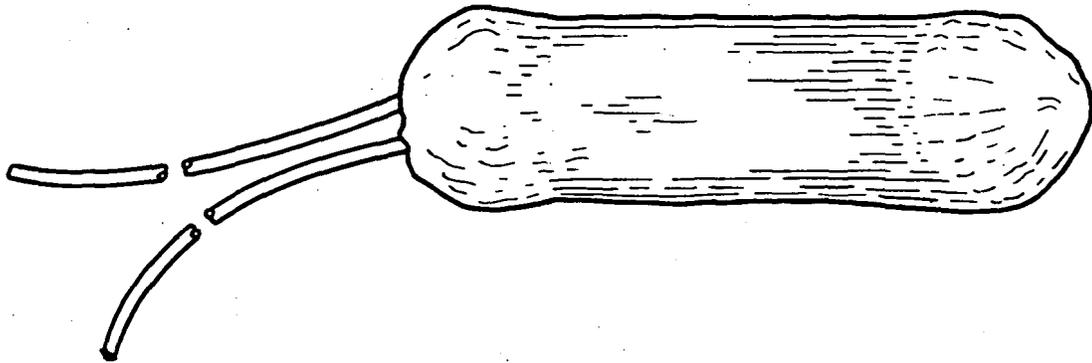

102L Resistor

102-TYPE RESISTORS

INDUCTIVE WINDINGS

| Line No. | CODE NO. | TERMINALS | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|-------------|-------------------------------------|-------------------------------|----------------|
| 1 | 102AB | Two terminal leads-no color code | .222 | 1 |
| 3 | 102AA | White - Red | 1.425 | 3 |
| | | White - Red White | 7.150 | 0.3 |
| | | White - Blue | 7.150 | 0.3 |
| 7 | 102D | White - Blue White | 1.425 | 3 |
| | | Blue White - Blue | 700. | 1 |
| | | Blue - Red White | 1560. | 1 |
| | | Red White - Red | 3500. | 1 |
| 10 | 102P | Blue White - Green | 8000. | 0.5 |
| | | Green - Green White | 6800. | 0.5 |
| | | Green White - Brown | 5200. | 0.5 |
| | | Brown - Brown White | 20000. | 0.5 |
| 14 | 102M | Red - Red White | 10000. | 1 |
| 15 | 102J | Red - Red White | 11000. | 0.5 |
| 16 | 102K | Red - Red White | 15000. | 0.5 |
| 17 | 102L | Red - Red White | 20000. | 1 |
| 18 | 102B | Red - Red White | 30000. | 0.5 |
| 19 | 102A | Red - Red White | 60000. | 1 |
| 20 | 102N | Red - Red White | 100000. | 1 |

REVERSE HALF-SECTION WINDINGS

| Line No. | CODE NO. | TERMINALS | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|-------------|-----------------|-------------------------------|----------------|
| 1 | 102F | Red - Red White | 2308 | 0.3 |
| 2 | 102C | Red - Red White | 3500 | 1 |
| 3 | 102G | Red - Red White | 7298 | 0.2 |

BIFILAR WINDINGS


| | | | | |
|----|------|------------------|--------|-----|
| 14 | 102W | Red & Red White | 154.50 | 0.2 |
| | | Red & Blue | 125.00 | 0.2 |
| | | Red White & Blue | 154.50 | 0.2 |
| 18 | 102T | Red & Red White | 164.40 | 0.2 |
| | | Red & Blue | 125.00 | 0.2 |
| | | Red White & Blue | 164.40 | 0.2 |
| 22 | 102U | Red & Red White | 313.80 | 0.2 |
| | | Red & Blue | 125.00 | 0.2 |
| | | Red White & Blue | 313.80 | 0.2 |

SERIES BIFILAR WINDINGS

| | | | | |
|----|------|------------------|--------|-----|
| 37 | 102Y | Red & Red White | 1095.4 | 0.4 |
| | | Red & Blue | 364.4 | 0.5 |
| | | Red White & Blue | 1095.4 | 0.4 |

104-TYPE RESISTORS

| Line No. | CODE NO. | FIG NO. | NOMINAL RESISTANCE OF WINDINGS (OHMS) | | | | | TOLERANCE % |
|----------|----------|---------|---------------------------------------|----------|---------|-------|-------|-------------|
| | | | "A" | "B" | "C" | "D" | "E" | |
| 1 | 104CD | 6A | 10.69 | 10.69 | 354.80 | 10.69 | 10.69 | * |
| 2 | 104BY | 1C | 13.40 | - | - | - | - | 1 |
| 3 | 104CC | 1C | 14.30 | - | - | - | - | 1 |
| 4 | 104CA | 4C | 56.00 | 56.00 | - | - | - | 0.5 |
| 5 | 104AC | 1A | 62.40 | - | - | - | - | 0.5 |
| 6 | 104BN | 5A | 74.50 | 2365.00 | 74.50 | - | - | 1 |
| 7 | 104CF | 5A | 98.36 | 1781.00 | 98.36 | - | - | 0.5 |
| 8 | 104CB | 4C | 111.20 | 111.20 | - | - | - | 0.5 |
| 9 | 104AD | 2A | 125.00 | 1450.00 | 125.00 | - | - | 0.5 |
| 10 | 104CH | 5A | 144.00 | 1200.00 | 144.00 | - | - | 0.5 |
| 11 | 104CG | 5A | 162.30 | 1048.00 | 162.30 | - | - | 0.5 |
| 12 | 104BG | 4A | 213.00 | 213.00 | - | - | - | 0.5 |
| 13 | 104BD | 5A | 219.50 | 723.90 | 219.50 | - | - | 0.5 |
| 14 | 104BP | 4A | 245.40 | 245.40 | - | - | - | 1 |
| 15 | 104BE | 5A | 312.50 | 429.40 | 312.50 | - | - | 0.5 |
| 16 | 104CJ | 5A | 338.60 | 369.20 | 338.60 | - | - | 0.5 |
| 17 | 104BF | 4A | 401.00 | 401.00 | - | - | - | 0.5 |
| 18 | 104BS | 4A | 467.00 | 467.00 | - | - | - | 0.5 |
| 19 | 104BC | 5A | 516.20 | 96.42 | 516.20 | - | - | 0.5 |
| 20 | 104BM | 1C | 1059.00 | - | - | - | - | 1 |
| 21 | 104BT | 4A | 1162.00 | 146.40 | - | - | - | 1 |
| 22 | 104BH | 4A | 1166.00 | 255.00 | - | - | - | 1 |
| 23 | 104BR | 4A | 2227.00 | 623.00 | - | - | - | 1 |
| 24 | 104BJ | 4A | 2304.00 | 753.00 | - | - | - | 1 |
| 25 | 104BU | 4B | 13140.00 | 16860.00 | - | - | - | 0.5 |
| 26 | 104CE | 7A | 19000.00 | 1000.00 | 1000.00 | - | - | 2 |

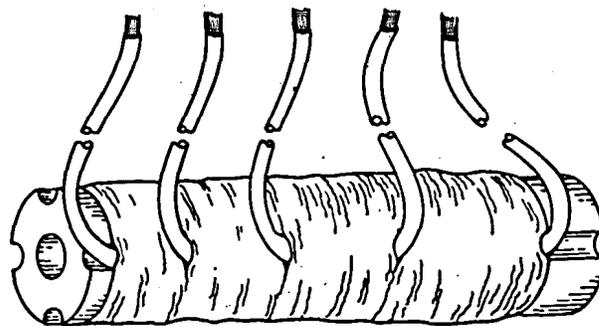

104-Type Resistor

* 104CD has a tolerance of $\pm 1\%$ for windings A-B-D- & E and $\pm 0.3\%$ for winding C.

104-TYPE RESISTORS - SCHEMATICS & LEAD COLORS




FIG. 1A & 1C

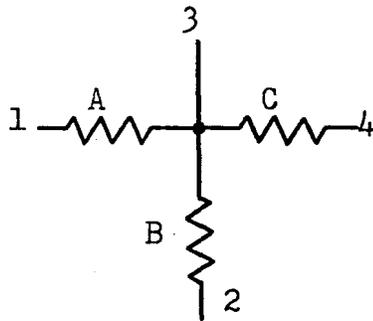


FIG. 2A

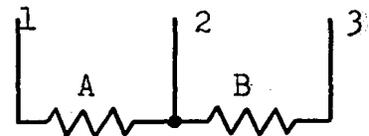


FIG. 4A, 4B & 4C

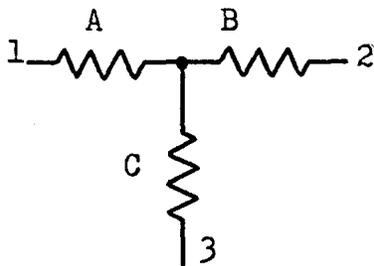


FIG. 5A

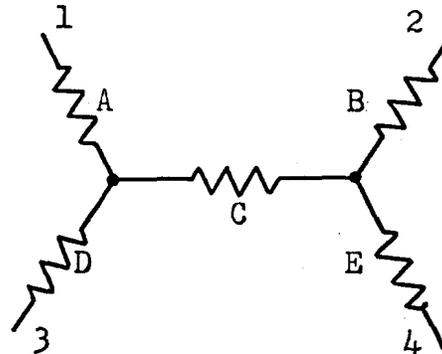


FIG. 6A

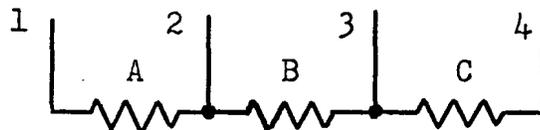


FIG. 7A

| FIG. | Color of Leads on: | | | | |
|------|--------------------|-----------|--------|------------|---|
| | 1 | 2 | 3 | 4 | 5 |
| 1A | White | White | | | |
| 1C | Blue | Blue | | | |
| 2A | White | Red | Yellow | White | |
| 4A | Green | Red | Yellow | | |
| 4B | Green-White | Brown | Green | | |
| 4C | White | Red | White | | |
| 5A | White | Red | White | | |
| 6A | Red | Red-White | Blue | Blue-White | |
| 7A | Blue-White | Yellow | Green | White | |

TWO REVERSE WINDING RESISTORS WITH THREE LEADS

| Line No. | CODE NO. | WINDING A | | WINDING B | |
|-------------|-------------|-------------------------------|----------------|-------------------------------|----------------|
| | | NOMINAL RESISTANCE OHMS | TOLERANCE % | NOMINAL RESISTANCE OHMS | TOLERANCE % |
| 1 | 115A | 238.10 | 0.25 | 732.10 | 0.25 |
| 2 | 115AH | 271.00 | 0.5 | 445.00 | 0.5 |
| 3 | 115N | 863.00 | 1 | 428.00 | 1 |
| 4 | 115AG | 880.00 | 0.5 | 2616.00 | 0.5 |


TWO BIFILAR WINDING RESISTORS WITH THREE LEADS

| | | | | | |
|----|-------|--------|-----|--------|-----|
| 14 | 115B | 1.88 | 5 | 6.09 | 5 |
| 15 | 115D | 8.24 | 2 | 9.24 | 2 |
| 16 | 115E | 10.37 | 2 | 11.63 | 2 |
| 17 | 115M | 11.80 | 2 | 15.05 | 2 |
| 18 | 115F | 13.05 | 1 | 14.65 | 1 |
| 19 | 115G | 16.43 | 1 | 18.44 | 1 |
| 20 | 115L | 19.69 | 2 | 26.70 | 2 |
| 21 | 115H | 20.69 | 1 | 23.21 | 1 |
| 22 | 115C | 21.18 | 2 | 94.90 | 1 |
| 23 | 115AB | 26.00 | 2 | 27.40 | 2 |
| 24 | 115AC | 28.80 | 2 | 30.10 | 2 |
| 25 | 115AD | 31.30 | 2 | 32.30 | 2 |
| 26 | 115AE | 33.20 | 2 | 33.80 | 2 |
| 27 | 115AF | 34.30 | 2 | 34.50 | 2 |
| 28 | 115AA | 36.60 | 1 | 41.10 | 1 |
| 29 | 115K | 37.80 | 2 | 57.30 | 2 |
| 30 | 115Y | 46.10 | 1 | 51.70 | 1 |
| 31 | 115U | 58.00 | 1 | 65.10 | 1 |
| 32 | 115W | 66.90 | 1 | 52.50 | 1 |
| 33 | 115T | 73.00 | 1 | 82.00 | 1 |
| 34 | 115AK | 80.60 | 1 | 102.00 | 0.5 |
| 35 | 115R | 91.90 | 1 | 103.20 | 1 |
| 36 | 115J | 96.40 | 2 | 194.10 | 2 |
| 37 | 115S | 118.50 | 1 | 87.50 | 1 |
| 38 | 115AJ | 133.60 | 0.5 | 183.70 | 0.5 |

115-TYPE RESISTORS

REVERSE AND BIFILAR WINDING RESISTORS
WITH THREE LEADS

| Line No. | CODE NO. | WINDING A NOMINAL RESISTANCE OHMS | TOLERANCE % | WINDING B NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|--|----------------|--|----------------|
| 1 | 115AL | 65.5 | 0.5 | 421.6 | 0.5 |
| 2 | 115P | 255.0 | 1 | 168.0 | 1 |

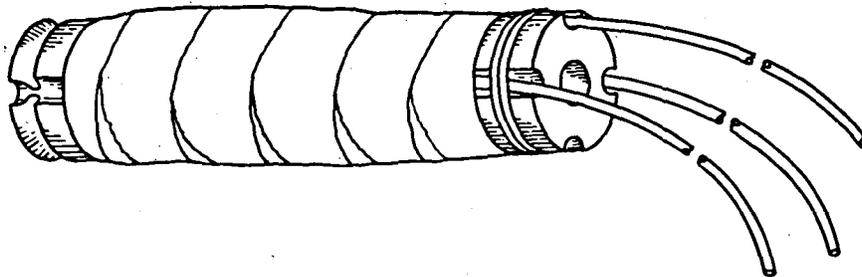


115-Type Resistor

DESCRIPTION

These resistors are non-inductively wound on ceramic spools. They are for use in rheostats in impedance bridges. The outer ends of the 212A resistor are left open for future adjustment. The outer ends of the other 212-, 213-, and 214-type resistors are spliced and soldered.

The overall dimensions of each 212- and 213-type resistors and each component 214-type resistor are approximately 1-3/4 inch long by 3/8 inch diameter. The tinned terminal leads extend approximately 2 inches from one end of the resistor.

Each 214A resistor is packaged as a single pair of resistors when furnished to the customer.

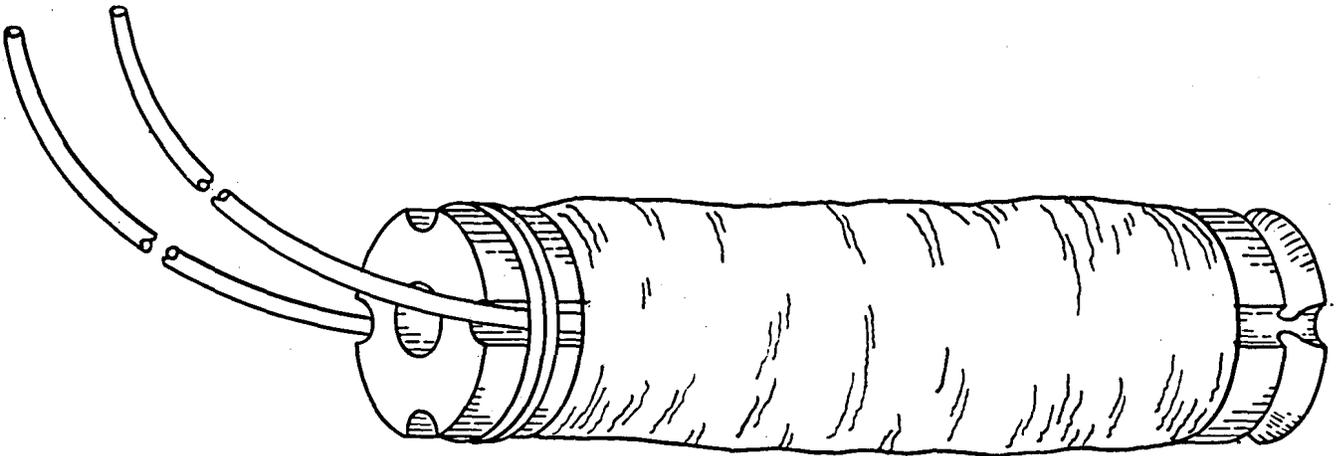

212-, 213-, and 214-TYPE RESISTORS

212- and 213-TYPE RESISTORS

| Line No. | CODE NO. | TYPE OF WINDING | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-----------------|-------------------------|-------------|
| 1 | 213A | Bifilar | 1.0 | 0.5 |
| 2 | 213B | Bifilar | 10.0 | 0.1 |
| 3 | 212B | Bifilar | 30.6 | 0.5 |
| 4 | 212A | Bifilar | 117.3 Min | |
| 5 | 213C | Reverse Layer | 1000.0 | 0.1 |

214-TYPE RESISTOR

| CODE NO. | Description & NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|--|--|
| 214A | Consists of a PAIR OF 213C RESISTORS, 1000 ohms each | Final resistance values should not differ from each other by more than 0.05% (or 0.5 ohm) when measured at 20° C |

DESCRIPTION

These resistors are inductively wound, using mandrellated 0.001 inch diameter enameled copper-nickel resistance wire such as Advance wire. They are enclosed and sealed in phenol fabric tubes. The windings are wound on a mandrel which is removed when the windings are inserted in the tubes.


The 128A resistor is 1 inch long by 1/2 inch diameter and is provided with two terminal pins.

The 129A resistor is 1-1/4 inch long by 1/2 inch diameter and is provided with three terminal pins.


In both resistors, the dimension from the free end of the terminals to the diametrically opposite surface of the resistor is 25/32 inch.

These resistors are end mounted by means of a fiber screw 1/4 inch long by 1/4 inch diameter. The screw is furnished with the resistor.

The resistors are used in line amplifiers in the Type L Carrier Telephone System.

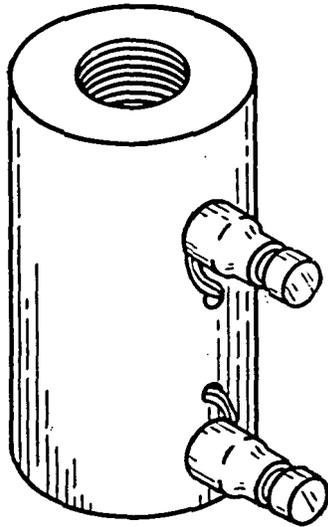

128A

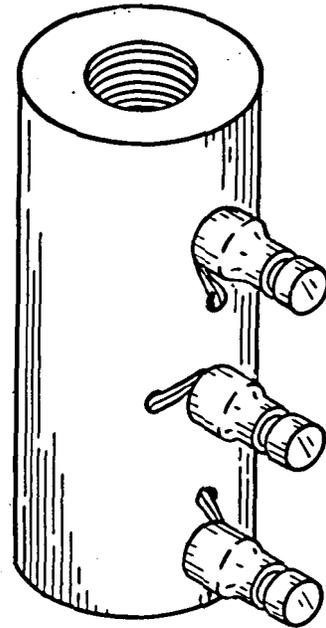

129A

| CODE NO. | TERMINAL PINS | NOMINAL RESISTANCE OHMS | TOLERANCE % | EQUIV. SHUNT CAPACITANCE AT 50 KC (mmf) |
|----------|----------------|-------------------------|-------------|---|
| 128A | 1 - 2 * | 7000 | 1 | 0 ±1.0 |
| 129A | 1 - 2 2 - 3 | 1750 1750 | 5 5 | 0 to -3.0 0 to -3.0 |

* Not marked on 128A - for reference only.

DESCRIPTION


The resistor is wound on an insulated cylindrical aluminum core. It is provided with seven lug-type terminals, one of which is not connected to the windings, but is used for separate wiring connection in the apparatus of which this resistor is a component.

The resistor is inductively wound. Windings A, B, C, D, and E are wound consecutively and are connected in series. The terminal which is not connected to the winding is at the end of the core, and the outer end of winding A is connected to the adjacent terminal.

The resistor is used in the 18A thermistor in the J86213A regulated disc type rectifier. The current through the resistor is approximately 0.030 amperes.

The overall dimensions, not including terminals, are 3-1/4 inches long by 23/32 inch diameter. The terminals are in axial alignment and extend radially 7/16 inch from the resistor surface.

The core is provided with a tapped hole 1/4-28 by 11/32 inch at each end for mounting.

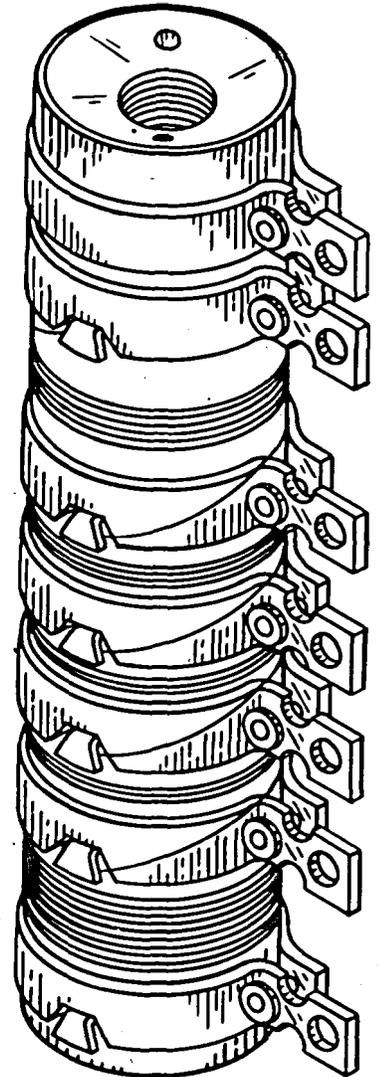

INDUCTIVE FIVE WINDING RESISTOR
CONSECUTIVELY CONNECTED IN SERIES
WITH SEVEN LUG TYPE TERMINALS

| CODE NO. | WINDING | BETWEEN TERMINALS | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|---------|-------------------|-------------------------|-------------|
| 139A | A | 5 - 6 | 80 | 5 |
| | B | 4 - 5 | 40 | 10 |
| | C | 3 - 4 | 20 | 10 |
| | D | 2 - 3 | 10 | 20 |
| | E | 1 - 2 | 600 | 2 |

DESCRIPTIONRESISTORS HAVING SPECIAL RESISTANCE-TEMPERATURE CHARACTERISTICS124A RESISTOR

This resistor is inductively wound with pure nickel wire on a core of insulating material. A material requirement for temperature coefficient of resistance specified for the wire in ppm/°C is maximum 6500, minimum 5800.

The resistor is designed for maximum current of 0.060 ampere. It is used in the J86212A regulated rectifier.

The dimensions are 3-9/16 inch long by 17/32 diameter by 7/8 inch over diametrically opposite ends of terminals. A 5/8 inch long by 1/4 inch diameter screw of insulating material is furnished for mounting.

224-TYPE RESISTORS

The 224A resistor has a low reactance (bifilar) winding on a phenolic core and is suitable for use at high frequencies. The 224B resistor has an inductive winding on a phenolic core and is not suitable for use at high frequencies. They are enclosed in a phenolic tubular shell. The resistors are equipped with 0.026 inch diameter tinned axial leads which extend approximately 2 inches from each end of the body. They may be supported from these leads. The body dimensions are 1 inch long by 21/64 inch diameter.

These resistors are wound with pure nickel wire. The temperature coefficient of resistance is specified as a requirement on the completed resistor and in ppm/°C is maximum 6500, minimum 5000.

The 224A resistor is used in the J68372D Limiter-Discriminator in TJ Radio. The normal operating voltage in this application is 0.7 volts. The voltage developed across the resistor provides a temperature compensating bias for clipper diodes in a limiter circuit. For satisfactory performance in this respect rather than heat dissipating capability, the power rating is limited to 0.01 watt.

The 224B resistor is intended for use in the TL Radio System.

225A RESISTOR


This resistor has a bifilar winding on a phenolic core and is suitable for use at high frequencies. It is covered by Mylar-backed thermosetting pressure sensitive tape. The resistor is equipped with 0.026 inch diameter tinned axial leads which extend approximately 1-7/16 inches from each end of the body. The resistor may be supported by these leads. The body dimensions are 1/2 inch long by 11/64 inch diameter.

The resistor is wound with nickel-iron wire (Ni 46%, Balance Iron). The temperature coefficient of resistance is specified as a requirement on the completed resistor and in ppm/°C is maximum 3400, minimum 2900.

The resistor is used in the J68404B I.F.Limiter-Amplifier of the TH Radio System to compensate for changes in ambient temperature. The normal operating current in this application is 80 milliamperes. For satisfactory performance in this respect rather than heat dissipating capability, the power rating should be limited to 0.06 watt.

March 1966


124-, 224-, and 225-TYPE RESISTORS

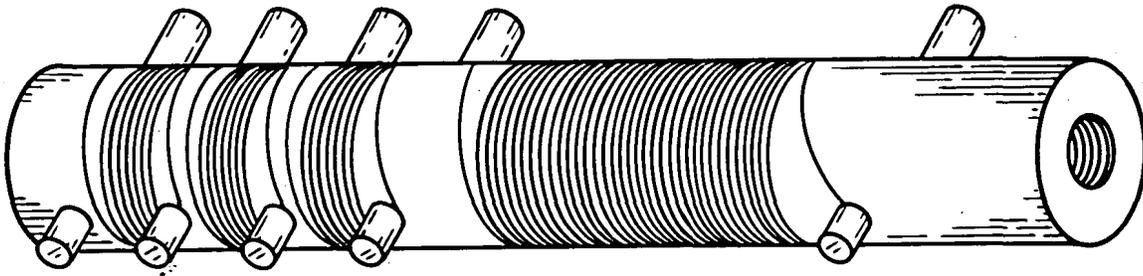

124A Resistor



224-Type Resistors

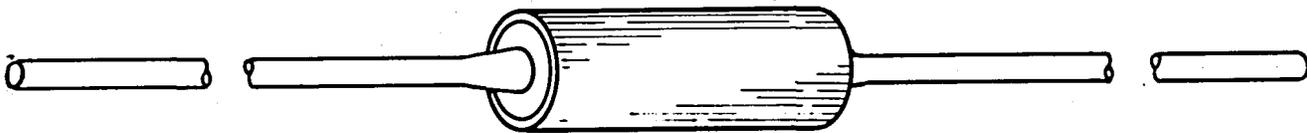

225A Resistor

FOUR WINDING RESISTOR CONNECTED IN SERIES

| CODE NO. | WINDING BETWEEN TERMINALS | NOMINAL RESISTANCE OHMS |
|----------|---------------------------|-------------------------|
| 124A | 1 - 2 | 520 |
| | 1 - 3 | 580 |
| | 1 - 4 | 640 |
| | 1 - 5 | 700 |

NOTE: Resistance values are held to within $\pm 2\%$ of nominal value at 68°F.

224-TYPE RESISTORS

| CODE NO. | NOMINAL RESISTANCE AT $\pm 2\%$ C | NOMINAL RESISTANCE AT 25° C OHMS | TOLERANCE % |
|----------|-----------------------------------|----------------------------------|--------------|
| 224A | | 70 | ± 4 ohms |
| 224B | | 35 | ± 5 ohms |

225A RESISTOR

| CODE NO. | NOMINAL RESISTANCE AT $\pm 2\%$ | NOMINAL RESISTANCE AT 25° C OHMS | TOLERANCE % |
|----------|---------------------------------|----------------------------------|--------------|
| 225A | | 8.8 | ± 4 ohms |

AXIAL LEAD - 126- and 131-TYPE RESISTORS

DESCRIPTION

These resistors are like the 107-type resistor except that the code numbers apply to a specific value of resistance whereas the 107-type covers a range of resistance values. The 126-type differs from the 107- and 131-types in being enclosed in a metal shell instead of a phenol plastic shell. The 131-type resistors are adjusted to tolerances for inductance as well as resistance, as shown in the table below. The 131-type resistors have inductive and non-inductive (bifilar) winding sections connected in series.

These resistors are equipped with tinned axial terminal leads which extend 2 inches from each end of the resistor. The body dimensions are 1-1/2 inches long by 1/2 inch in diameter. They should not be supported by the lead wires. The power rating is 0.25 watt for continuous operation at 77° F ambient.




| Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE % | INDUCTANCE MICRO-HEN. | TOLERANCE % |
|----------|----------|-----------------|-------------|-----------------------|-------------|
| 1 | 126A | 15 | ±2 | (Non-Inductive) | |
| 2 | 126C | 135 | ±1 | (Bifilar) | |
| 3 | 131A | 12 | ±2 | 25 | ±8 |
| 4 | 131B | 20 | ±2 | 55 | ±8 |

DESCRIPTION

The 130A resistor consists of a resistance winding on a ceramic tube equipped with two radial tinned lead wires, which extend 2 inches from the longitudinal center line of the resistor core tube. The resistive element consists of several turns of resistance tape wrapped around the core tube, covered and secured in place by electrical tape and a bakelite varnish finish.

The body dimensions are 1 inch long by 9/32 inch diameter.

This resistor is used in the 3⁴0A plug.

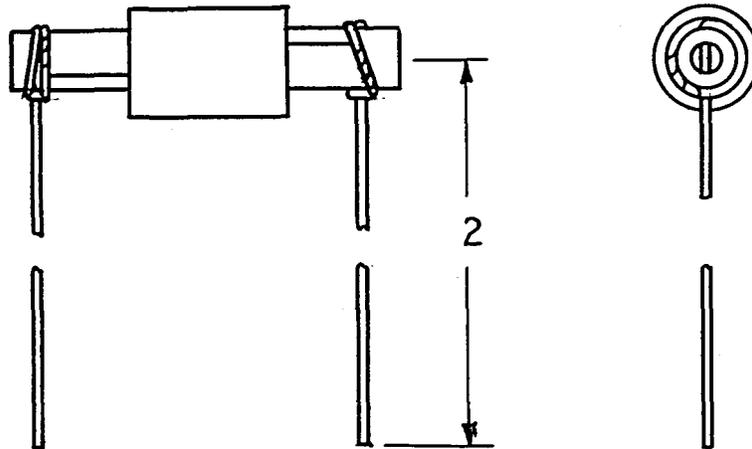

| CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % | WATTAGE RATING |
|----------|-------------------------|-------------|----------------|
| 130A | 72 | 0.1 | 0.5 |

DESCRIPTION

All of these resistors use the 106-type resistor structure, except that the 215-type is provided with No. 47 cord tips at the ends of the two terminal leads. They differ from the 106-type, which covers a range of resistance values, by having a specific value of resistance for each code number.

These resistors differ among themselves in types of windings as follows:


| | |
|----------|--|
| 202-type | Mandrellated wire winding |
| 210-type | Inductive winding |
| 211-type | Inductive, copper and resistance wire windings in series |
| 215-type | Bifilar type winding |

The body dimensions are 1 inch long by $21/64$ inch diameter. The resistors have 0.026 inch diameter tinned axial lead wires which extend 2 inches from each end, except the 215A which has one lead extending $2-3/16$ inches and the other $1-9/16$ inches from the body of the resistor.

The 210A resistor, in addition to resistance requirement, has an inductance requirement of maximum 0.20 microhenry, minimum 0.10 microhenry.



202, 210, & 211-Type Resistor

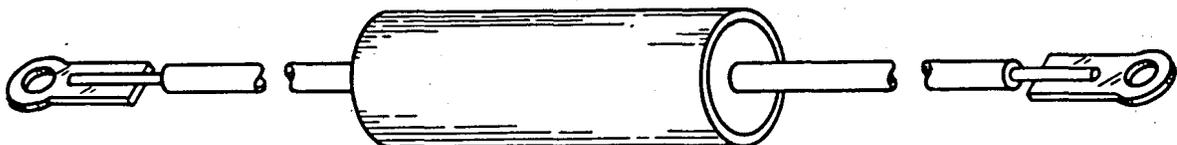

215-Type Resistor

202-, 210-, 211-, and 215-TYPE RESISTORS - AXIAL LEADS

202-TYPE RESISTOR

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|----------|----------|-------------------------|-------------|
| 1 | 202A | 2205 | 0.2 |

210-TYPE RESISTORS

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % | RATING* WATTS |
|----------|----------|-------------------------|-------------|---------------|
| 14 | 210A | 16 | 3 | 0.01 |
| 15 | 210B | 344 | 1 | 0.25 |

* Power rating applies at 150° F (66°C) ambient temperature. For each degree that the ambient exceeds 150° F, the power rating decreases 1%

211-TYPE RESISTORS

| Line No. | CODE NO. | NOMINAL RESISTANCE OHMS | TOL % | NOMINAL INDUCTANCE MICROHENRIES | TOL % |
|----------|----------|-------------------------|-------|---------------------------------|-------|
| 30 | 211A | 95 | 0.5 | 8.83 | 10 |
| 31 | 211B | 100 | 0.5 | 9.30 | 10 |
| 32 | 211C | 105 | 0.5 | 9.77 | 10 |
| 33 | 211D | 110 | 0.5 | 10.23 | 10 |
| 34 | 211E | 115 | 0.5 | 10.69 | 10 |
| 35 | 211F | 120 | 0.5 | 11.16 | 10 |
| 36 | 211G | 125 | 0.5 | 11.63 | 10 |
| 37 | 211H | 130 | 0.5 | 12.09 | 10 |
| 38 | 211J | 135 | 0.5 | 12.56 | 10 |
| 39 | 211K | 140 | 0.5 | 13.02 | 10 |
| 40 | 211L | 200 | 0.5 | 15.00 | 33 |

AXIAL LEADS - 202-, 210-, 211-, and 215-TYPE RESISTORS

215-TYPE RESISTOR

| CODE NO. | NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|-------------------------------|----------------|
| 215A | 600 | 0.1 |

NOTE: The resistor is rated at 0.25 watt at 130° F (54° C) ambient temperature. For each degree F that the ambient exceeds 130° F the power rating decreases 2-1/2%.

219A and 220A RESISTORS



AXIAL LEADS - 219A and 220A RESISTORS

DIMENSIONS - INCHES

| CODE NO. | BODY | | LEADS | |
|-------------|--------|----------|--------|----------|
| | LENGTH | DIAMETER | LENGTH | DIAMETER |
| 219A* | 1 | 5/16 | 2 | 0.026 |
| 220A | 1-1/2 | 1/2 | 2 | 0.037 |

* Dimensions are those of each unit of the pair

219A RESISTOR

| CODE NO. | DESCRIPTION & NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|--|--|
| 219A | Consists of a pair of 106A resistors, 5 ohms each. | Final resistance values do not differ from each other by more than 0.01C ohm (or 0.2%) when measured at 25° C. |

220A RESISTOR

MULTIPLE LAYER BUNCH WINDING RESISTOR

| CODE NO. | DESCRIPTION & NOMINAL RESISTANCE OHMS | TOLERANCE % |
|-------------|--|----------------|
| 220A | This is a 107A resistor of 180000 ohms | 1 |



NOTE: Power rating is 1.0 watt at 150° F (66° C) ambient temperature. For each degree F that the ambient exceeds 150° F the power rating decreases 1%.

MTD-SPECIFIC CODE




ELECTRON TUBE BASE - 88-TYPE RESISTORS

DESCRIPTION


These resistors are mounted on electron tube type bases having six terminal pins. The terminal pins of the 88A are strapped so as to provide zero attenuation when in circuit. The other 88-type resistors have a spool containing six windings mounted on the base. The windings form an "H" section and provide attenuation as shown. They are provided with handles to facilitate plugging into a No. 144B electron tube socket

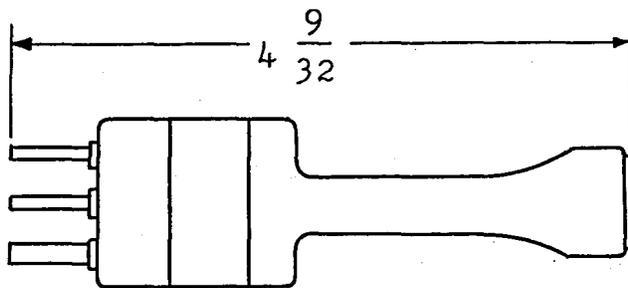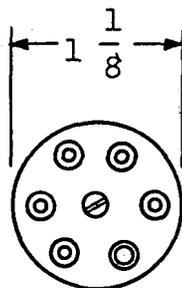

88A

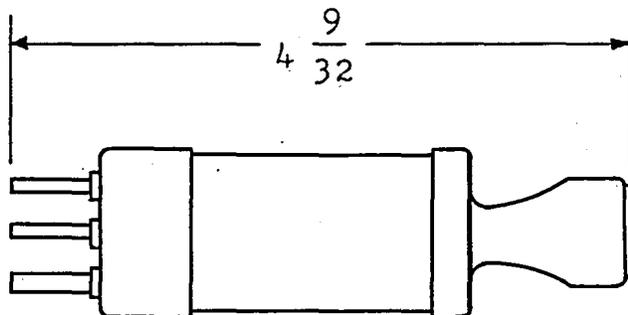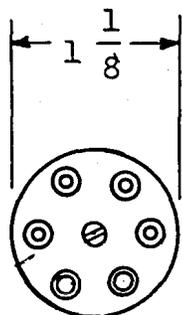

88B, C, D, E, & F

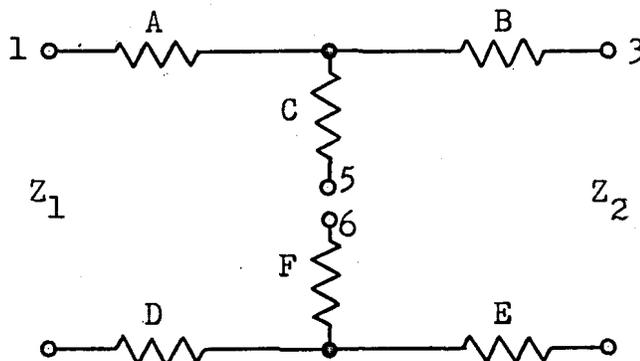

$Z_1 = Z_2 = 600 \text{ Ohms}$

Circuit provides strap from 5 to 6

Prong Numbers not marked

$A = B = D = E$

$C = F$

Clockwise, large prongs are 3 & 4 respectively.

88-TYPE RESISTORS - ELECTRON TUBE BASE

| Line No. | CODE NO. | RESISTANCE - OHMS | | | TOLERANCE % | ATTENUATION DB |
|-------------|-------------|-------------------|----------|-----|----------------|-------------------|
| | | WDG. A | WDG. C | | | |
| 1 | 88A | 0 | Infinite | --- | 0 | |
| 2 | 88B | 17.3 | 2594 | ±1 | 1 | |
| 3 | 88C | 34.4 | 1292 | ±1 | 2 | |
| 4 | 88D | 51.4 | 853 | ±1 | 3 | |
| 5 | 88E | 67.9 | 629 | ±1 | 4 | |
| 6 | 88F | 84.1 | 493 | ±1 | 5 | |

ELECTRON TUBE BASE - 89-TYPE RESISTORS

DESCRIPTION

The 89-type resistors consist of wire wound resistor units potted with microcrystalline wax in electron tube type bases having six terminal pins. They are connected in circuit by inserting in a No. 144-type electron tube socket.

These resistors are used as interchangeable components of pads and equalizers, and the attenuations listed in the following tables are the attenuations introduced by network, or the overall circuit when the 89-type resistors are in circuit.

The resistors are for use in Type A Carrier and Type A2 Video Systems.

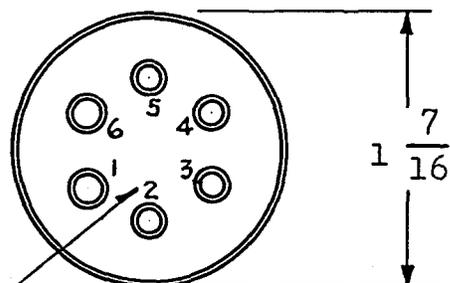
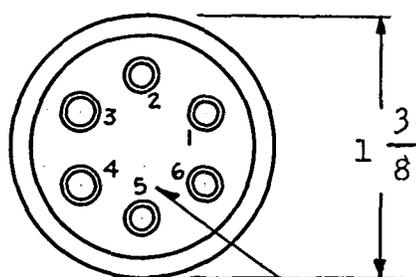
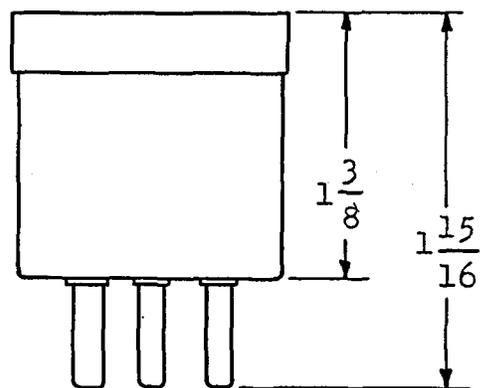
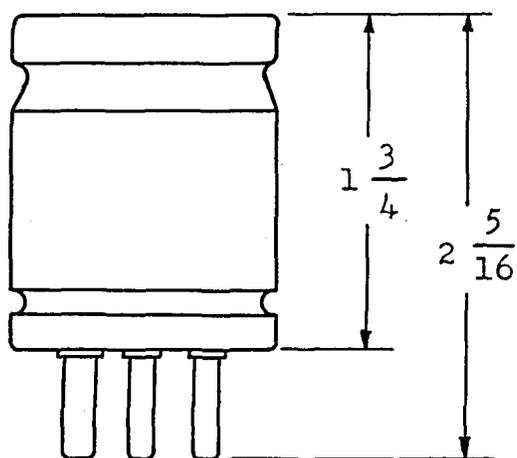


FIG. A

FIG. B

Numbers are for reference only and do not in all cases agree with associated socket terminal designations.

89-TYPE RESISTORS - ELECTRON TUBE BASE

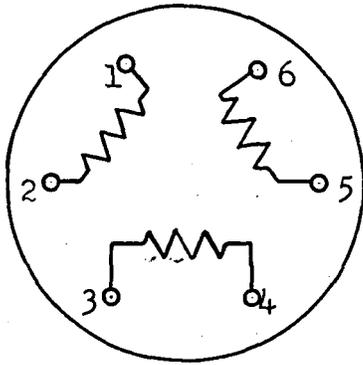


FIG. 1

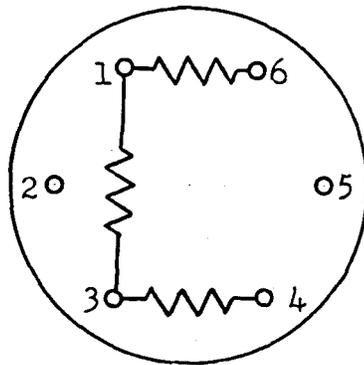


FIG. 2

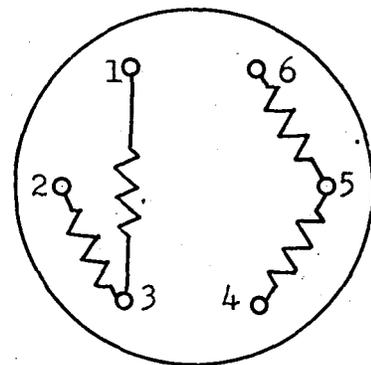


FIG. 3

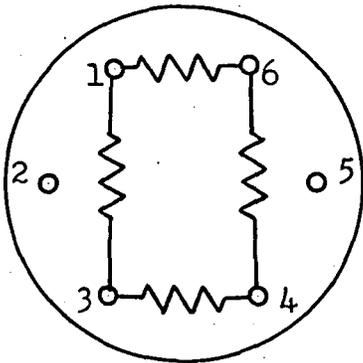


FIG. 4

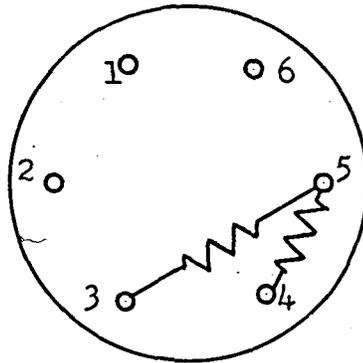


FIG. 5

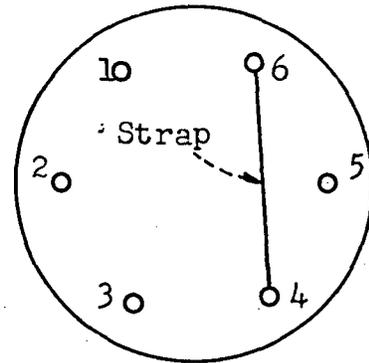


FIG. 6

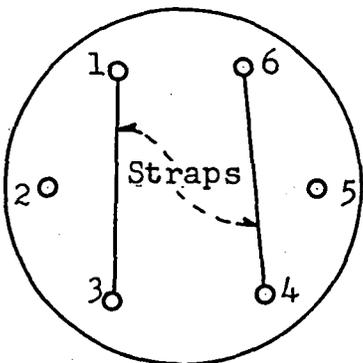


FIG. 7

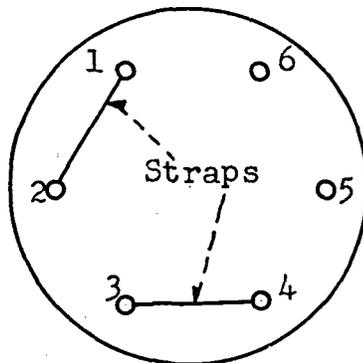


FIG. 8

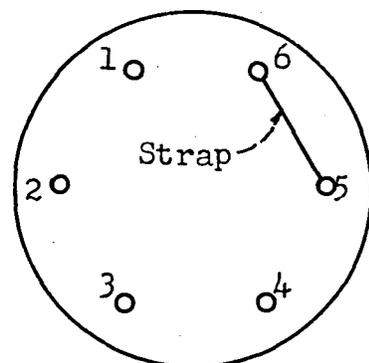


FIG. 9

ELECTRON TUBE BASE - 89-TYPE RESISTORS

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 1
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS | | | ATTENUATION DB* |
|-------------|-------------|---|---------------|----------|--------------------|
| | | 1 - 2 | OHMS 3 - 4 | 5 - 6 | |
| 1 | 89C | 17.9 | 17.9 | 10000 ** | 0.5 |
| 2 | 89D | 27.5 | 27.5 | 6545 ** | 0.75 |
| 3 | 89E | 36.5 | 36.5 | 4931 ** | 1.0 |
| 4 | 89F | 46.6 | 46.6 | 3859 ** | 1.25 |
| 5 | 89G | 56.5 | 56.5 | 3186 ** | 1.5 |
| 6 | 89H | 67.2 | 67.2 | 2687 | 1.75 |
| 7 | 89J | 77.75 | 77.75 | 2315 | 2.0 |
| 8 | 89K | 89.0 | 89.0 | 2021 | 2.25 |
| 9 | 89L | 100.3 | 100.3 | 1796 | 2.5 |
| 10 | 89M | 111.9 | 111.9 | 1609 | 2.75 |
| 11 | 89N | 123.8 | 123.8 | 1454 | 3.0 |
| 12 | 89P | 136.5 | 136.5 | 1319 | 3.25 |
| 13 | 89R | 149.1 | 149.1 | 1207 | 3.5 |
| 14 | 89S | 162.0 | 162.0 | 1110 | 3.75 |
| 15 | 89T | 174.8 | 174.8 | 1030 | 4.0 |
| 16 | 89U | 189.0 | 189.0 | 952.1 | 4.25 |
| 17 | 89W | 203.7 | 203.7 | 883.4 | 4.5 |
| 18 | 89Y | 218.4 | 218.4 | 823.8 | 4.75 |
| 19 | 89AA | 233.4 | 233.4 | 771.2 | 5.0 |
| 20 | 89AB | 248.9 | 248.9 | 723.2 | 5.25 |
| 21 | 89AC | 264.9 | 264.9 | 679.5 | 5.5 |
| 22 | 89AD | 281.9 | 281.9 | 638.6 | 5.75 |
| 23 | 89AE | 298.9 | 298.9 | 602.2 | 6.0 |
| 24 | 89AF | 316.3 | 316.3 | 569.2 | 6.25 |
| 25 | 89AG | 334.1 | 334.1 | 538.8 | 6.5 |
| 26 | 89AH | 352.6 | 352.6 | 510.6 | 6.75 |
| 27 | 89AJ | 371.1 | 371.1 | 484.3 | 7.0 |
| 28 | 89AK | 391.4 | 391.4 | 459.9 | 7.25 |
| 29 | 89AL | 411.4 | 411.4 | 437.5 | 7.5 |
| 30 | 89AM | 432.4 | 432.4 | 416.3 | 7.75 |
| 31 | 89AN | 453.5 | 453.5 | 396.9 | 8.0 |
| 32 | 89AP | 475.7 | 475.7 | 378.4 | 8.25 |
| 33 | 89AR | 498.3 | 498.3 | 361.2 | 8.5 |
| 34 | 89AS | 521.8 | 521.8 | 345.0 | 8.75 |
| 35 | 89AT | 545.5 | 545.5 | 330.0 | 9.0 |

Resistance values are held within $\pm 2\%$ unless otherwise indicated.

*Obtained only when associated with other resistors in miscellaneous pads and equalizers, in 600 ohm circuits.

** Resistance values are held within $\pm 5\%$.

89-TYPE RESISTORS - ELECTRON TUBE BASE

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 1
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS | | | ATTENUATION DB* |
|-------------|-------------|---|--------|---------|--------------------|
| | | OHMS | | | |
| | | 1 - 2 | 3 - 4 | 5 - 6 | |
| 1 | 89AU | 571.0 | 571.0 | 315.2 | 9.25 |
| 2 | 89AW | 595.5 | 595.5 | 302.3 | 9.5 |
| 3 | 89AY | 622.0 | 622.0 | 289.4 | 9.75 |
| 4 | 89BA | 649.0 | 649.0 | 277.3 | 10.0 |
| 5 | 89BB | 703.9 | 703.9 | 255.7 | 10.5 |
| 6 | 89BC | 764.4 | 764.4 | 235.4 | 11.0 |
| 7 | 89BD | 827.5 | 927.5 | 217.5 | 11.5 |
| 8 | 89BE | 894.3 | 894.3 | 201.2 | 12.0 |
| 9 | 89BF | 965.0 | 965.0 | 186.5 | 12.5 |
| 10 | 89BG | 1040.0 | 1040.0 | 173.1 | 13.0 |
| 11 | 89BH | 1119.0 | 1119.0 | 160.8 | 13.5 |
| 12 | 89BJ | 1203.0 | 1203.0 | 149.6 | 14.0 |
| 13 | 89BK | 1292.0 | 1292.0 | 139.3 | 14.5 |
| 14 | 89BL | 1387.0 | 1387.0 | 129.8 | 15.0 |
| 15 | 89BM | 1487.0 | 1487.0 | 121.1 | 15.5 |
| 16 | 89BN | 1593.0 | 1593.0 | 113.0 | 16.0 |
| 17 | 89BP | 1705.0 | 1705.0 | 105.6 | 16.5 |
| 18 | 89BR | 1824.0 | 1824.0 | 98.7 | 17.0 |
| 19 | 89BS | 1950.0 | 1950.0 | 92.3 | 17.5 |
| 20 | 89BT | 2083.0 | 2083.0 | 86.4 | 18.0 |
| 21 | 89BU | 2224.0 | 2224.0 | 80.9 | 18.5 |
| 22 | 89BW | 2374.0 | 2374.0 | 75.8 | 19.0 |
| 23 | 89BY | 2532.0 | 2532.0 | 71.1 | 19.5 |
| 24 | 89CA | 2700.0 | 2700.0 | 66.7 | 20.0 |
| 25 | 89CB | 2878.0 | 2878.0 | 62.5 | 20.5 |
| 26 | 89CC | 3066.0 | 3066.0 | 58.7 | 21.0 |
| 27 | 89CD | 3266.0 | 3266.0 | 55.1 | 21.5 |
| 28 | 89CE | 3477.0 | 3477.0 | 51.8 | 22.0 |
| 29 | 89CF | 5030.0 | 5030.0 | 35.75 | 25.0 |
| 30 | 89CG | 9190.0 | 9190.0 | 19.59 | 30.0 |
| 31 | 89CH | 8.76 | 8.76 | 20550.0 | .25 |
| 32 | 89CJ | 676.6 | 676.6 | 266.2 | 10.25 |
| 33 | 89CK | 734.5 | 734.5 | 245.0 | 10.75 |
| 34 | 89CL | 795.6 | 795.6 | 226.2 | 11.25 |
| 35 | 89CM | 860.5 | 860.5 | 209.2 | 11.75 |

Resistance values are held within $\pm 2\%$ unless otherwise indicated.

* Obtained only when associated with other resistors in miscellaneous pads and equalizers, in 600 ohm circuits.

ELECTRON TUBE BASE - 89-TYPE RESISTORS

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 1
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS | | | ATTENUATION DB* |
|-------------|-------------|---|---------------|---------------|--------------------|
| | | OHMS 1 - 2 | OHMS 3 - 4 | OHMS 5 - 6 | |
| 1 | 89CN | 929.1 | 929.1 | 193.7 | 12.25 |
| 2 | 89CP | 1002.0 | 1002.0 | 179.6 | 12.75 |
| 3 | 89CR | 1079.0 | 1079.0 | 166.8 | 13.25 |
| 4 | 89CS | 1161.0 | 1161.0 | 155.1 | 13.75 |
| 5 | 89CT | 1248.0 | 1248.0 | 144.2 | 14.25 |
| 6 | 89CU | 1339.0 | 1339.0 | 134.4 | 14.75 |
| 7 | 89CW | 1436.0 | 1436.0 | 125.3 | 15.25 |
| 8 | 89CY | 1539.0 | 1539.0 | 116.9 | 15.75 |
| 9 | 89DA | 1647.0 | 1647.0 | 109.2 | 16.25 |
| 10 | 89DB | 1764.0 | 1764.0 | 102.0 | 16.75 |
| 11 | 89DC | 1885.0 | 1885.0 | 95.5 | 17.25 |
| 12 | 89DD | 2015.0 | 2015.0 | 89.36 | 17.75 |
| 13 | 89DE | 2152.0 | 2152.0 | 83.66 | 18.25 |
| 14 | 89DF | 2298.0 | 2298.0 | 78.3 | 18.75 |
| 15 | 89DG | 2452.0 | 2452.0 | 73.42 | 19.25 |
| 16 | 89DH | 2614.0 | 2614.0 | 68.84 | 19.75 |
| 17 | 89DJ | 3166.0 | 3166.0 | 56.86 | 21.25 |
| 18 | 89DK | 3938.0 | 3938.0 | 45.7 | 23.0 |
| 19 | 89FP | 7236.0 | 7236.0 | 24.9 | 28.0 |
| 20 | 89FR | 8155.0 | 8155.0 | 22.1 | 29.0 |
| 21 | 89FS | 16570.0 | 16570.0 | 10.9 | 35.0 |
| 22 | 89FT | 2879.0 | 2879.0 | 64.5 | 20.25 |
| 23 | 89FU | 2971.0 | 2971.0 | 60.6 | 20.75 |
| 24 | 89FW | 3372.0 | 3372.0 | 53.4 | 21.75 |
| 25 | 89FY | 3585.0 | 3585.0 | 50.2 | 22.25 |
| 26 | 89GA | 3700.0 | 3700.00 | 48.6 | 22.50 |
| 27 | 89GB | 3818.0 | 3818.0 | 47.2 | 22.75 |
| 28 | 89GC | 5685.0 | 5685.0 | 31.7 | 26.0 |
| 29 | 89GD | 4455.0 | 4455.0 | 40.4 | 24.0 |
| 30 | 89GE | 6416.0 | 6416.0 | 28.05 | 27.0 |

Resistance values are held within $\pm 2\%$ unless otherwise indicated.

* Obtained only when associated with other resistors in miscellaneous pads and equalizers, in 600 ohm circuits.

89-TYPE RESISTORS - ELECTRON TUBE BASE

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 2
CONSTRUCTION PER FIGURE B

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS | | | ATTENUATION DB |
|-------------|-------------|---|-------|-------|-------------------|
| | | 1 - 3 | 1 - 6 | 3 - 4 | |
| 1 | 89DM | 8.66 | 1300 | 1300 | 1 Note 1 |
| 2 | 89DN | 17.40 | 657 | 657 | 2 Note 1 |
| 3 | 89DP | 35.70 | 332 | 332 | 4 Note 1 |
| 4 | 89DR | 67.30 | 196 | 196 | 7 Note 1 |
| 5 | 89DS | 107.00 | 145 | 145 | 10 Note 1 |
| 6 | 89FD* | 1423.00 | 1925 | 1925 | 10 Note 2 |
| 7 | 89FE* | 4950.00 | 1222 | 1222 | 20 Note 2 |
| 8 | 89FF* | 15796.00 | 1065 | 1065 | 30 Note 2 |

Resistance values are held to within $\pm 1\%$ unless otherwise indicated.

* Resistance values are held to within $\pm 0.25\%$.

NOTES:

1. Obtained when used in 75 ohm unbalanced circuit in A2 Video Amplifier equipment.
2. Obtained when used in 1000 ohm unbalanced circuit in A2 Video Amplifier equipment.

ELECTRON TUBE BASE - 89-TYPE RESISTORS

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 3
CONSTRUCTION PER FIGURE B

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS | | | | ATTENUATION DB |
|-------------|-------------|---|-------|-------|-------|-------------------|
| | | 1 - 3 | 2 - 3 | 4 - 5 | 5 - 6 | |
| 1 | 89DU | 210 | 470 | 4770 | 2120 | 1 Note 1 |
| 2 | 89DW | 320 | 400 | 3125 | 2500 | 2 Note 1 |
| 3 | 89DY | 400 | 335 | 2500 | 2985 | 3 Note 1 |
| 4 | 89EA | 460 | 280 | 2170 | 3570 | 4 Note 1 |
| 5 | 89EB | 525 | 228 | 1905 | 4385 | 5 Note 1 |
| 6 | 89EC | 590 | 185 | 1695 | 5400 | 6 Note 1 |
| 7 | 89ED | 650 | 146 | 1538 | 6840 | 7 Note 1 |
| 8 | 89EE | 710 | 110 | 1412 | 9090 | 8 Note 1 |
| 9 | 89EF | 765 | 80 | 1309 | 12500 | 9 Note 1 |
| 10 | 89EG | 825 | 50 | 1213 | 20000 | 10 Note 1 |
| 11 | 89EH | 880 | 23 | 1140 | open | 11 Note 1 |
| 12 | 89EJ | 926 | 0* | 1080 | open | 12 Note 1 |
| 13 | 89EL | 450 | 945 | 2220 | 1058 | 1 Note 2 |
| 14 | 89EM | 780 | 880 | 1283 | 1135 | 2 Note 2 |
| 15 | 89EN | 1040 | 750 | 962 | 1333 | 3 Note 2 |
| 16 | 89EP | 1290 | 630 | 775 | 1587 | 4 Note 2 |
| 17 | 89ER | 1500 | 530 | 667 | 1886 | 5 Note 2 |
| 18 | 89ES | 1700 | 430 | 588 | 2328 | 6 Note 2 |
| 19 | 89ET | 1910 | 345 | 523 | 2900 | 7 Note 2 |
| 20 | 89EU | 2100 | 260 | 476 | 3845 | 8 Note 2 |
| 21 | 89EW | 2330 | 190 | 429 | 5260 | 9 Note 2 |
| 22 | 89EY | 2550 | 125 | 392 | 8000 | 10 Note 2 |
| 23 | 89FA | 2770 | 55 | 361 | 18180 | 11 Note 2 |
| 24 | 89FB | 3030 | 0* | 330 | open | 12 Note 2 |

Resistance values are held to within $\pm 1\%$ unless otherwise indicated.

* Resistance values are 0.03 ohms.

NOTES:

1. Obtained when used in Bulge Equalizer in A2 Video Amplifier equipment.
2. Obtained when used in Slope Equalizer in A2 Video Amplifier equipment.

89-TYPE RESISTORS - ELECTRON TUBE BASE

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 4
CONSTRUCTION PER FIGURE B

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | | | A. |
|-------------|-------------|---|-------|--------|--------|----|
| | | 1 - 3 | 4 - 6 | 3 - 4 | 1 - 6 | |
| 1 | 89FH | 6.33 | 6.33 | 1902.0 | 1902.0 | 1 |
| 2 | 89FJ | 12.77 | 12.77 | 960.0 | 960.0 | 2 |
| 3 | 89FK | 26.22 | 26.22 | 486.0 | 486.0 | 4 |
| 4 | 89FL | 49.25 | 49.25 | 287.7 | 287.7 | 7 |
| 5 | 89FM | 78.20 | 78.20 | 211.7 | 211.7 | 10 |

* Obtained when used in 110 ohm balanced circuit in A2 Video Amplifier equipment.

Resistance values are held to within $\pm 0.3\%$.

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 5
CONSTRUCTION PER FIGURE B

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | TOLERANCE % | ATTENUATION DB |
|-------------|-------------|---|-------|----------------|-------------------|
| | | 4 - 5 | 3 - 5 | | |
| 20 | 89FN | 75 | 1000 | Note 1 | Note 2 |

NOTES:

1. Tolerance between terminals 4 - 5 is 1% and tolerance between terminals 3 - 5 is 1.5%.
2. This resistor is used in the A2 Video System for testing and is not used in transmission.

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 6
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | MAXIMUM TOLERANCE OHMS | ATTENUATION DB |
|-------------|-------------|---|--|------------------------------|-------------------|
| | | 4 - 6 | | | |
| 35 | 89DL** | 0 | | 0.008 | zero |
| 36 | 89DT** | 0 | | 0.008 | zero |
| 37 | 89EK** | 0 | | 0.008 | zero |
| 38 | 89FC** | 0 | | 0.008 | zero |

**Contains no resistor units.

ELECTRON TUBE BASE - 89-TYPE RESISTORS

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 7
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | MAXIMUM TOLERANCE OHMS | ATTENUATION DB |
|-------------|-------------|---|-------|------------------------------|-------------------|
| | | 1 - 3 | 4 - 6 | | |
| 1 | 89FG* | 0 | 0 | 0.008 | zero |

* Contains no resistor units.

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 8
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | | MAXIMUM TOLERANCE OHMS | ATTENUATION DB** |
|-------------|-------------|---|-------|----------|------------------------------|---------------------|
| | | 1 - 2 | 3 - 4 | 5 - 6 | | |
| 10 | 89A* | 0 | 0 | Infinite | 0.008 | zero |

* Contains no resistor units.

** Obtained only when associated with other resistors in miscellaneous pads and equalizers, in 600 ohm circuits.

RESISTORS CONNECTED TO TERMINAL PINS
PER FIGURE 9
CONSTRUCTION PER FIGURE A

| Line No. | CODE NO. | NOMINAL RESISTANCE BETWEEN TERMINALS OHMS | | | MAXIMUM TOLERANCE OHMS | ATTENUATION DB** |
|-------------|-------------|---|----------|-------|------------------------------|---------------------|
| | | 1 - 2 | 3 - 4 | 5 - 6 | | |
| 20 | 89B* | Infinite | Infinite | 0 | 0.008 | Infinite |

* Contains no resistor units

** Obtained only when associated with other resistors in miscellaneous pads and equalizers, in 600 ohm circuits.


DESCRIPTION

98-type resistors are form wound with copper-nickel resistance wire, such as Advance, having a temperature coefficient of resistance of maximum ± 50 PPM/ $^{\circ}$ C. They are assembled in a phenolic case mounted on an electron tube type base having four terminal pins. The resistors are connected in circuit by inserting them in bayonet type electron tube sockets such as the No. 100R Socket.

The resistors are used in toll systems. They are used in place of electron tubes while adjusting filament circuits which are connected to voltage regulated filament batteries.

The windings are connected to the two filament terminals of the base. There are no connections to the grid and plate terminals.

The power rating of the 98-type resistor is 7.0 watts.

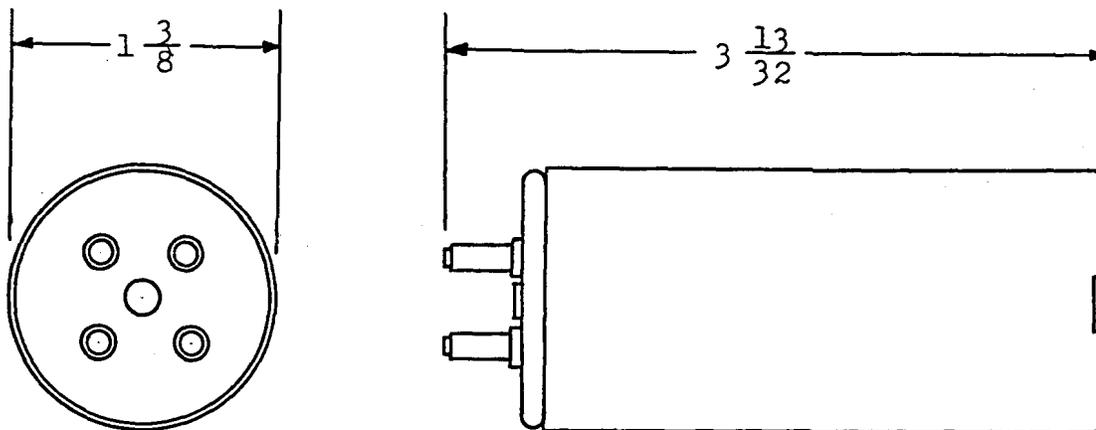

| Line No. | CODE NO. | RESISTANCE OHMS | TOLERANCE % | SUBSTITUTES FOR ELECTRON TUBE |
|----------|----------|-----------------|-------------|-------------------------------|
| 1 | 98A | 4.5 | 1 | 101 & 104 (1 amp) |
| 2 | 98B | 8.5 | 1 | 101F, 101J, 102L |
| 3 | 98C | 4.0 | 1 | 102F |
| 4 | 98D | 2.1 | 5 | 102 (1 amp) |
| 5 | 98F | 16.9 | 0.5 | 101L |


ELECTRON TUBE BASE - 113- and 114-TYPE RESISTORS

DESCRIPTION

The 113- and 114-type resistors consist of 84-type vitreous enameled resistors enclosed in phenolic cases assembled on electron tube type bases. The 113A resistor base has 6 terminal pins and the resistor is connected in circuit by inserting it in a No. 144B electron tube socket. The 114A and 114B resistor bases have 5 terminal pins and the resistors are connected in circuit by inserting them in No. 141A electron tube sockets.

The resistors are used in J and K Carrier Telephone Systems to adjust heater currents to proper values. For this purpose, the 113A, 114A, and 114B resistors are used as substitutes for the 310A, 311A, and 338A electron tubes, respectively.

The resistor units of the 113A, 114A, and 114B are the 84D, E, and F resistors, respectively. These resistor units are wound with copper-nickel resistance wire, such as Advance, having a maximum temperature coefficient of resistance of ± 50 PPM/ $^{\circ}$ C.

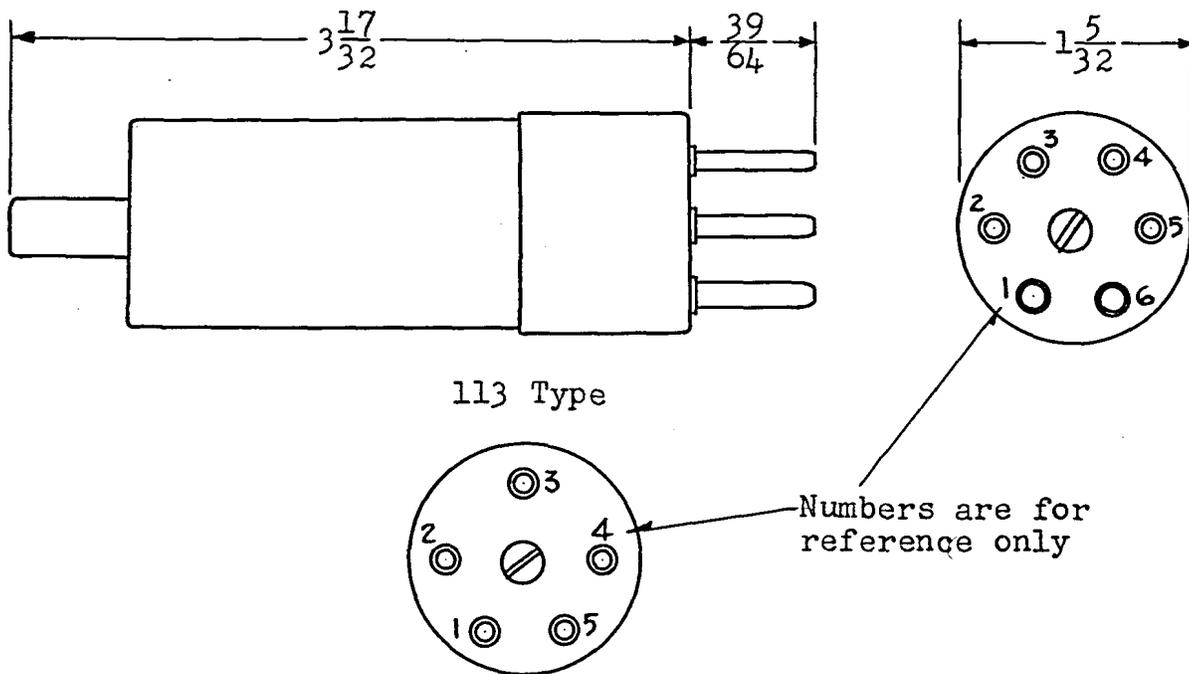

| CODE NO. | TERMINALS* | RESISTANCE-OHMS | TOLERANCE % |
|----------|------------|-----------------|-------------|
| 113A | 1 - 6 | 31.2 | 1 |
| 114A | 1 - 5 | 15.6 | 1 |
| 114B | 1 - 5 | 20.0 | 1 |


* There are no connections to the other terminals of the base.

DESCRIPTION


The 116A resistor is a tapped resistor enclosed in a ceramic shell provided with a removable metal cover. It is arranged to mount in a No. 143B electron tube socket, or similar type, with resistance across the filament contacts and has no connection to plate and grid contacts.

The total resistance is 23.5 ohms and by strapping the terminals, resistance may be varied in 0.5 ohms steps from 0 to 23.5 ohms. Resistance values are held within limits of $\pm 5\%$. It is capable of dissipating 4.2 watts continuously.

The 116A resistor is intended for use in the Type "J" Carrier Telephone System in heater circuits.

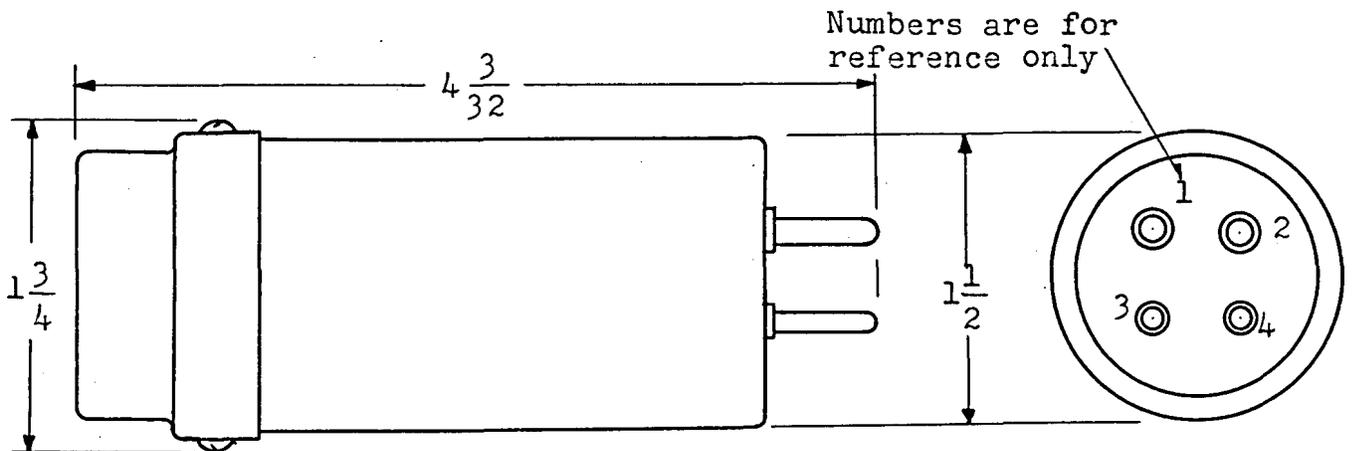

116A Resistor

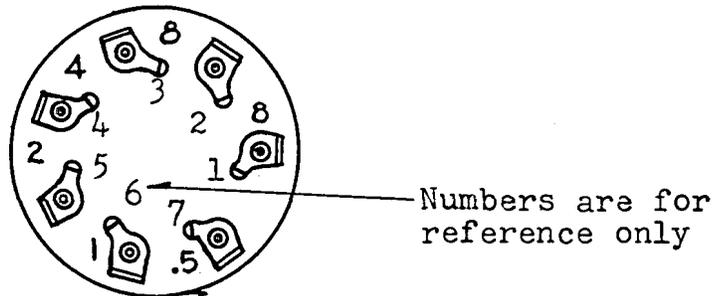


116A Resistor with Cover removed

| CODE NO. | NOMINAL RESISTANCE OHMS | BETWEEN TOP TERMINALS |
|----------|-------------------------|-----------------------|
| 116A | 8 | 1 - 2 |
| | 8 | 2 - 3 |
| | 4 | 3 - 4 |
| | 2 | 4 - 5 |
| | 1 | 5 - 6 |
| | 0.5 | 6 - 7 |

DESCRIPTION

The 125A resistor consists of three vitreous enameled type resistors enclosed in a metal shell and mounted on an octal electron tube base. It is put into circuit by mounting in a KS-13364, L2 or similar type electron tube socket. The three resistors R1, R2, and R3 are connected to the terminals in the tube base as shown in the table. They are KS-8512, L3A type resistors with notched terminals. R2 and R3 are wound with copper-nickel wire, such as Advance or equivalent, and R1 is wound with iron free nickel-chromium wire, such as Nichrome V or equivalent.

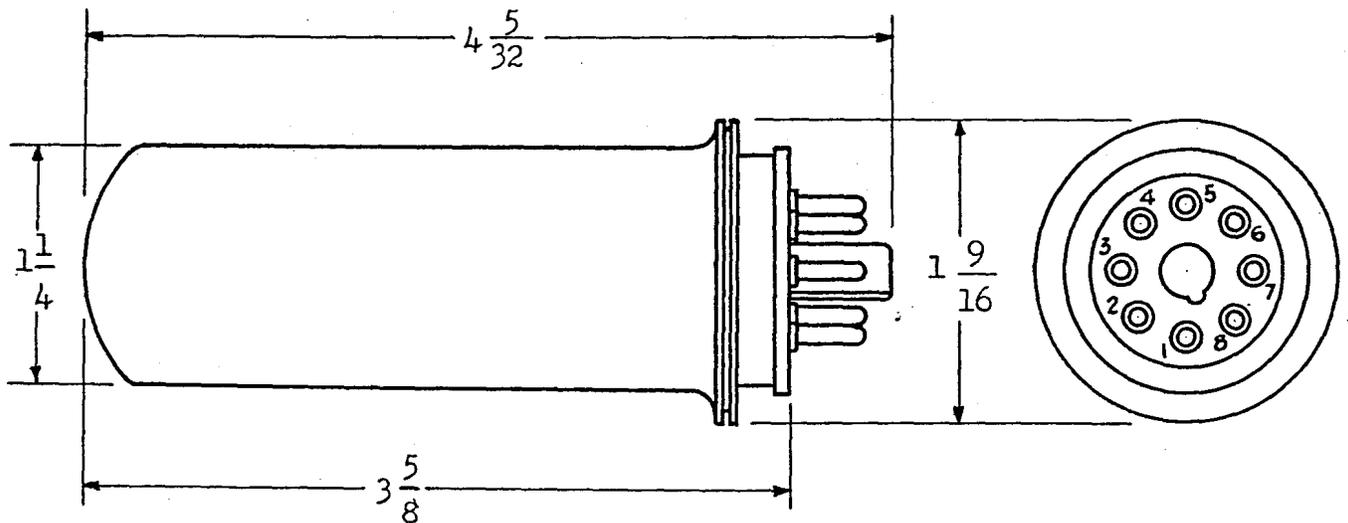

125A Resistor


| CODE NO. | TERMINALS | R NUMBER | RESISTANCE OHMS | TOLERANCE % |
|----------|-----------|----------|-----------------|-------------|
| 125A | 1 - 5 | R1 | 4000 | ±5 |
| | 2 - 3 | R2 | 15 | ±5 |
| | 7 - 8 | R3 | 15 | ±5 |

ELECTRON TUBE BASE - 127A and 132A RESISTORS

DESCRIPTION

The 127A and 132A resistors consist of several D167000-type wire wound resistors having ceramic cores and black enamel moisture-resistant finish. The 127A resistor also uses a KS-13490 L2 fixed composition resistor. They are assembled in a rectangular metal can provided with an 8 pin electron tube base designated KS-13871 plug and a 343B coaxial plug. While the 127A and 132A resistors use the same size can and have the same plugs on the same side of the can, the relative positions of the two plugs differ.

The 127A resistor is a dummy amplifier load and the 132A resistor is a dummy regulator load, and consume the same power as an amplifier and a regulator, respectively. When the circuit of an amplifier and regulator are not being used for transmission, the dummy loads are used in place of the amplifier and regulator to conserve the latter units while maintaining the proper voltages and currents on the other amplifier and regulator on the repeater panel.

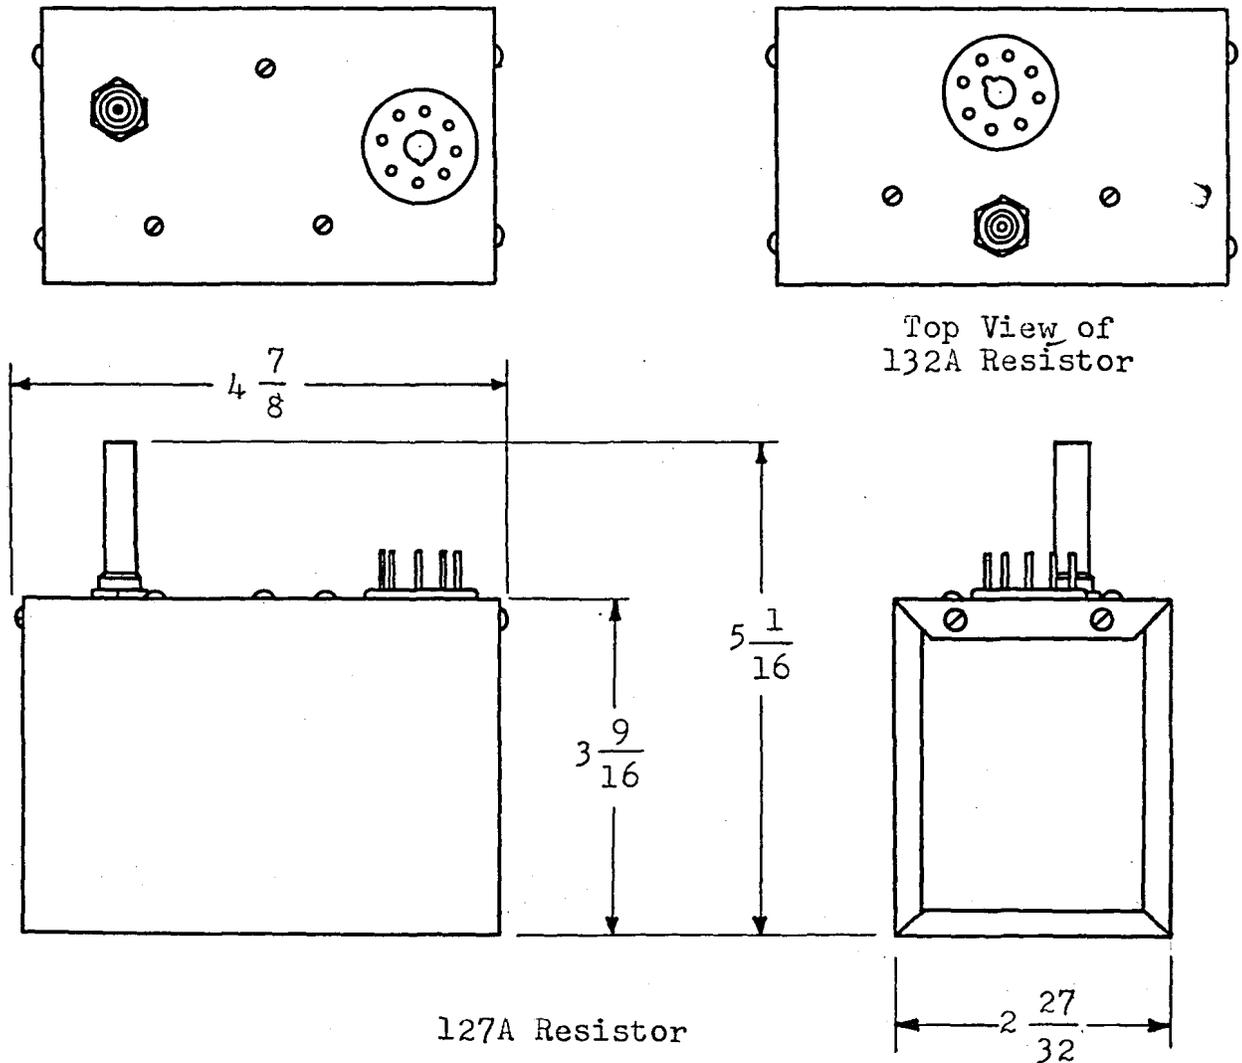

127A and 132A RESISTORS - ELECTRON TUBE BASE

| CODE NO. | FIG NO. | D167000 TYPE | | | | | | KS-13490 | |
|-------------|------------|--------------|----------|-------|----------|------|----------|----------|----------|
| | | R1 | | R2 | | R3 | | R4 | |
| | | OHMS | TOL % | OHMS | TOL % | OHMS | TOL % | OHMS | TOL % |
| 127A | 1 | 15 | 1 | 4800 | 2 | 15 | 1 | 100 | 10 |
| 132A | 2 | 15 | 1 | 18000 | 2 | | | | |


ELECTRON TUBE BASE - 135A RESISTOR

DESCRIPTION

The 135A resistor consists of a vitreous enameled type resistor enclosed in a phenol fiber shell assembled on an electron tube octal base. The resistor is connected to terminal pins 2 and 7. There are no connections to the six other pins.

The power rating is 7.5 watts at 104° F ambient temperature.

The 135A resistor is used to substitute for the No. 375A electron tube while adjusting heater currents to their proper values in the toll systems telephone repeater program transmission voice amplifier circuit.

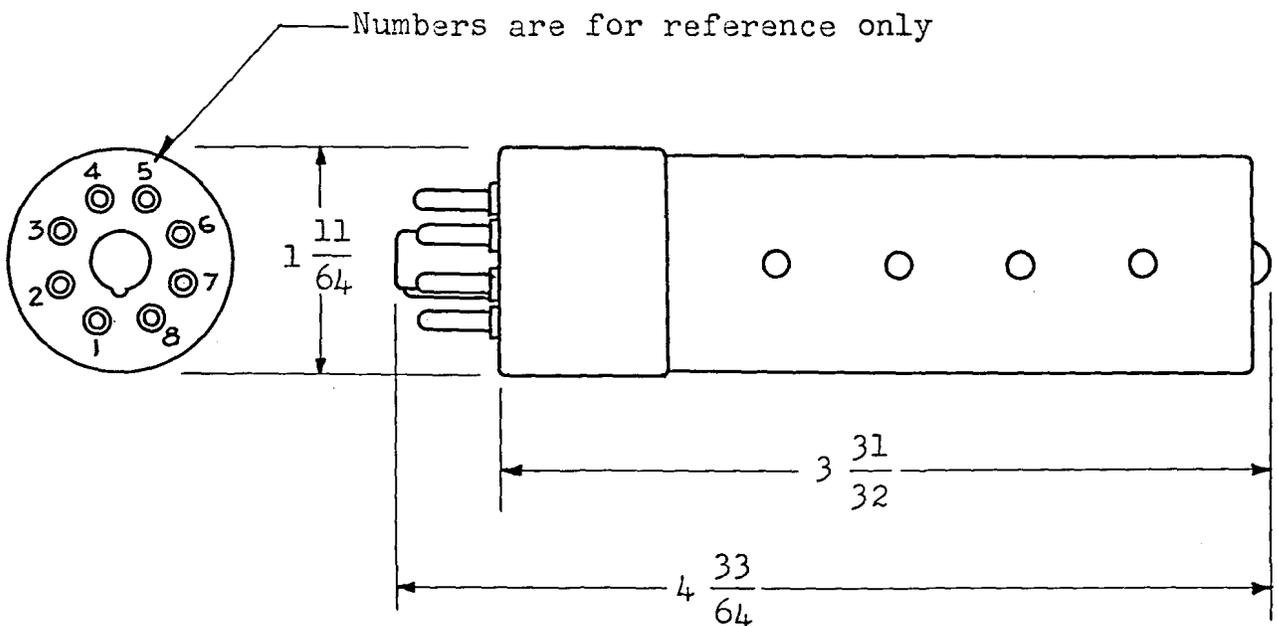


| CODE NO. | RESISTANCE VALUE OHMS | TOLERANCE % |
|----------|-----------------------|-------------|
| 135A | 62.4 | ±1 |

ELECTRON TUBE BASE - 148-TYPE RESISTORS

DESCRIPTION

The 148A and B resistors each consist of three resistors enclosed in a housing of insulating material, mounted on an electron tube type base equipped with 6 terminal pins. They are connected in circuit by inserting in a six terminal electron tube socket such as the No. 144B electron tube socket. They are used as 75 ohm unbalanced resistance pads in A2 Video Amplifier equipment.

The component resistors are vitreous enameled resistors manufactured in accordance with specification KS-13657 and have notched terminals. They have essentially non-inductive windings of the Ayrton Perry type and are wound with essentially iron free nickel-chromium resistance wire such as Nichrome V.

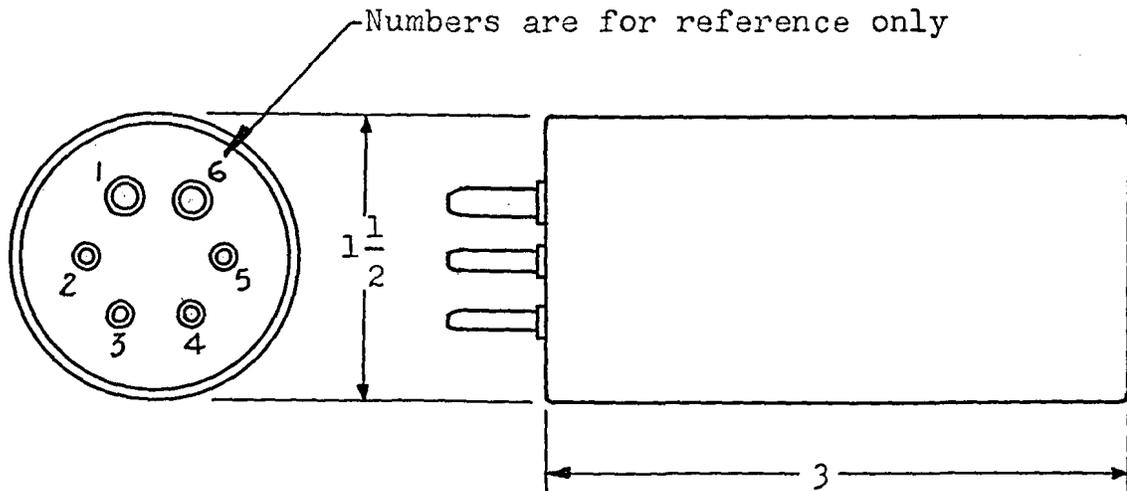

| CODE NO. | DB VALUE | RESISTANCE BETWEEN TERMINALS | | | TOLERANCE % |
|----------|----------|------------------------------|---------------|-------|-------------|
| | | 1 - 3 | OHMS 1 - 6 | 3 - 4 | |
| 148A | 10 | 107 | 144 | 144 | 1.5 |
| 148B | 20 | 371 | 92 | 92 | 1.5 |