

Huawei NetEngine AR600 Series Enterprise Routers


Huawei AR600 series enterprise routers are 1U fixed routers designed for use in small- and medium-sized business (SMBs) and small-sized enterprise branches. The AR600 integrates various service features such as SD-WAN, routing, switching and security, providing diversified services and high performance.

Product Overview

Huawei's next-generation NetEngine AR600 series enterprise routers use multi-core processors and a non-blocking switching structure, helping to deliver four times the industry average performance. The NetEngine AR600 also integrates functions such as SD-WAN, cloud management, routing, switching, VPN, and security, ensuring diversified and cloud-based services are fully supported.

Huawei NetEngine AR600 series enterprise routers can be deployed at branches of SMBs and small-sized enterprises as required to provide enterprise network egress capabilities.

Front and rear views of Huawei NetEngine AR651C

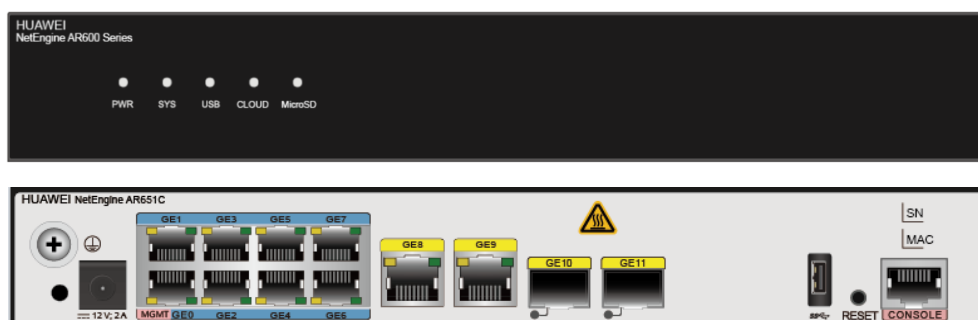

Features and Benefits

Features and Benefits

Service Requirement	Features and Benefits
High performance	<ul style="list-style-type: none"> Multi-core processors and a non-blocking switching structure Four times the industry average performance, providing the lowest latency for key services
High reliability	<ul style="list-style-type: none"> Link backup for enterprise services, improving reliability Fault detection and determination in milliseconds, minimizing service interruption time
Easy O&M	Multiple management modes, including SD-WAN management, SNMP-based network management, web-based network management, and cloud-based management, simplifying network deployment and reducing OPEX

Service Requirement	Features and Benefits
Service convergence	Integration of functions such as routing, switching, VPN, and security, meeting diversified enterprise service requirements, saving space, and reducing TCO
Security	Built-in firewall, URL filtering, and multiple VPN technologies, providing comprehensive security protection capabilities
SD-WAN Ready	<ul style="list-style-type: none"> Built-in SD-WAN solution, building cost-effective and business-friendly connections over the Internet ZTP (email-, USB-, and DHCP-based deployment), minimizing skill requirements and provisioning devices in minutes First packet identification (FPI) for SaaS applications and service awareness for complex applications, identifying over 90% of applications Traffic steering based on bandwidth and link quality, ensuring experience of key applications and improving bandwidth utilization to up to 90%

Architecture Highlights

Architecture Feature	Benefits
Multi-core processor	High-performance multi-core processors, supporting high-speed WAN connections, powerful route calculation capabilities, and enhanced L4-L7 service processing

Product Specifications

Item	NetEngine AR651C
System Parameters	
Processor	4-core
Forwarding Performance (LAN - > WAN + WAN - > LAN, NAT + ACL + QoS, IMIX, Default)	1 Gbps
Forwarding Performance (LAN - > WAN + WAN - > LAN, NAT + ACL + QoS, IMIX, Boost License)	1.5 Gbps
IPsec performance (IMIX)	800 Mbps
Fixed WAN ports	2 x GE SFP + 2 x GE RJ45
Fixed LAN ports	8 x GE RJ45(can be configured as WAN),
USB port	1 x USB 3.0 (compatible with USB 2.0)
Auxiliary or console port	1 x RJ45 console port
Memory	1 GB
Flash memory	1 GB
Dimensions and Weight	
Router dimensions, With no mounting bracket installed (H x W x D)	43.6 mm x 250.0 mm x 210.0 mm

Item	NetEngine AR651C
Packaging dimensions (H x W x D)	155 mm x 280 mm x 455 mm
Weight	1.75 kg
Rack	IEC
Occupied rack space	1U
Power Specifications, Power Consumption, and Heat Dissipation	
Rated input voltage range (AC)	100 V to 240 V
Rated input frequency (AC)	50 Hz/60 Hz
Maximum input voltage range (AC)	90 V to 264 V
Maximum input current (AC)	3 A
Maximum output power (AC)	36 W
Typical power consumption	22.1 W
Maximum power consumption	25.2 W
Fan module	Natural heat dissipation, without fans
Airflow	N/A
Noise level	N/A
Environment Parameters	
Operating temperature	0°C to 45°C
Operating humidity	5% to 95% (non-condensing)
Operating altitude	< 5000 m (16404.2 ft.)
Storage temperature	−40°C to +70°C
Storage altitude	< 5000 m (16404.2 ft.)
Safety and Regulatory Standards	
EMC standards compliance	CISPR32 Class A EN 55032 Class A CISPR24 EN 55024 ETSI EN 300 386 ETSI EN 301 489-1 ETSI EN 301 489-17 ETSI EN 301 489-52
Environmental standards compliance	RoHS REACH WEEE
Safety standards compliance	IEC 60950-1 EN 60950-1


Item	NetEngine AR651C
Basic function	DHCP server/client/relay, PPPoE server/client, PPPoA server/client, PPPoEoA server/client, NAT, and sub-interface management
LAN	IEEE 802.1P, IEEE 802.1Q, IEEE 802.3, VLAN management, VLAN aggregation, MAC management, STP
WLAN (AC)	AP management (AC discovery, AP access, and AP management), CAPWAP, WLAN user management, WLAN radio management (802.11a/b/g/n/ac), WLAN QoS (WMM), and WLAN security (WEP, WPA, WPA2, key management)
IPv4 unicast routing	Routing policies, static routes, RIP, OSPF, IS-IS, BGP
IPv6 unicast routing	Static routes, routing policies, RIPng, OSPFv3, IS-ISv6, BGP4+
Basic IPv6 function	IPv6 ND, IPv6 PMTU, IPv6 FIB, IPv6 ACL, ICMPv6, DNSv6, DHCPv6
IPv6 tunneling	Manual tunnel, automatic tunnel, GRE tunnel, IPv6 over IPv4 tunnel, 6 to 4 tunnel, ISATAP
Multicast	IGMP v1/v2/v3, PIM-SM, PIM-DM, MSDP, MBGP, IPv6 PIM, MLD
VPN	IPsec VPN, GRE VPN, DSVPN, A2A VPN, L2TP VPN, L2TPv3 VPN, VxLAN
QoS	DiffServ mode, priority mapping, traffic policing (CAR), traffic shaping, congestion avoidance, congestion management, MQC (traffic classifier, traffic behavior, and traffic policy), hierarchical QoS, FR QoS, Smart Application Control (SAC)
Security	ACL (v4/v6), domain-based stateful firewall, 802.1X authentication, MAC address authentication, portal authentication, AAA authentication, RADIUS authentication, HWTACACS authentication, PKI, broadcast storm suppression, ARP security, ICMP attack defense, URPF, CPCAR, blacklist, attack source tracing, online behavior management, URL filtering
Management and maintenance	Upgrade management, device management, web-based network management, GTL, SNMP (v1/v2c/v3), RMON, NTP, CWMP, Auto-Config, URL-based/USB-based/DHCP deployment, NETCONF/YANG, CLI, Netstream, IP FPM, TCP FPM, TWAMP Light, IP accounting, NQA

Networking and Application

- **SD-WAN Using Hybrid Links**


In the SD-WAN Solution, the NetEngine AR600 functions as the gateway of SMBs and small-sized enterprise branches and supports hybrid access using multiple physical links. The solution also leverages Huawei's next-generation controller, the Agile Controller, which implements centralized and visualized management. The NetEngine AR600 provides extensive SD-WAN features and delivers optimal service experience for enterprises through intelligent application identification, intelligent traffic steering, and intelligent acceleration. For details about Huawei SD-WAN Solution, visit

<https://e.huawei.com/en/solutions/business-needs/enterprise-network/sd-wan>.

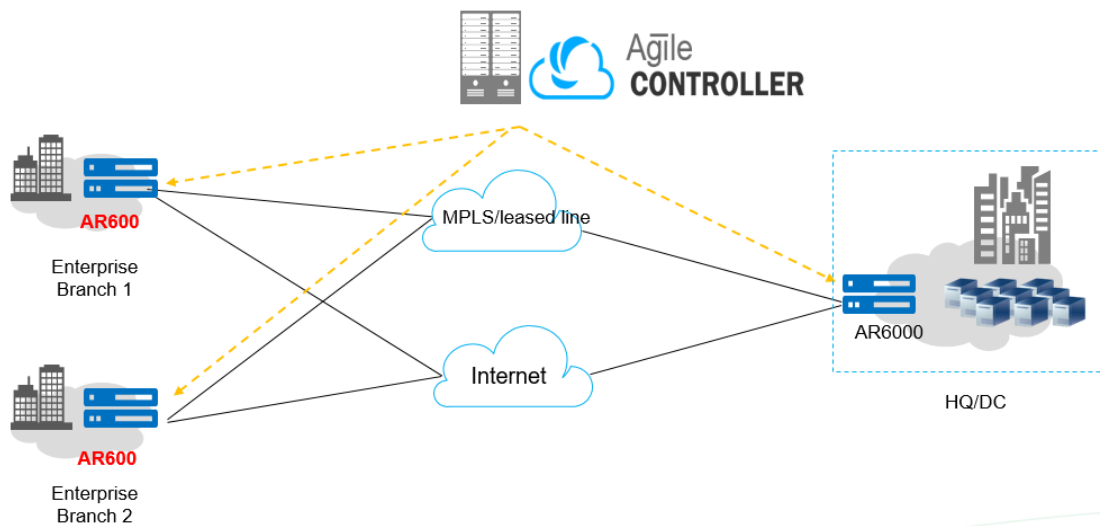

- Building Different Types of VPNs by Leveraging Internet Resources**

The NetEngine AR600 provides various secure access functions for communication between enterprise branches and between branches and headquarters. These functions also allow an enterprise's partners to access its resources. Secure tunnels such as GRE VPN, IPSec VPN, DSVPN, L2TP VPN, and EVPN tunnels can be set up between the headquarters and branches for secure data access and transmission. The NetEngine AR600 supports quick tunnel deployment and authentication for branches. Furthermore, partners authenticated and authorized by the AR600 can remotely access the enterprise resources over these tunnels.

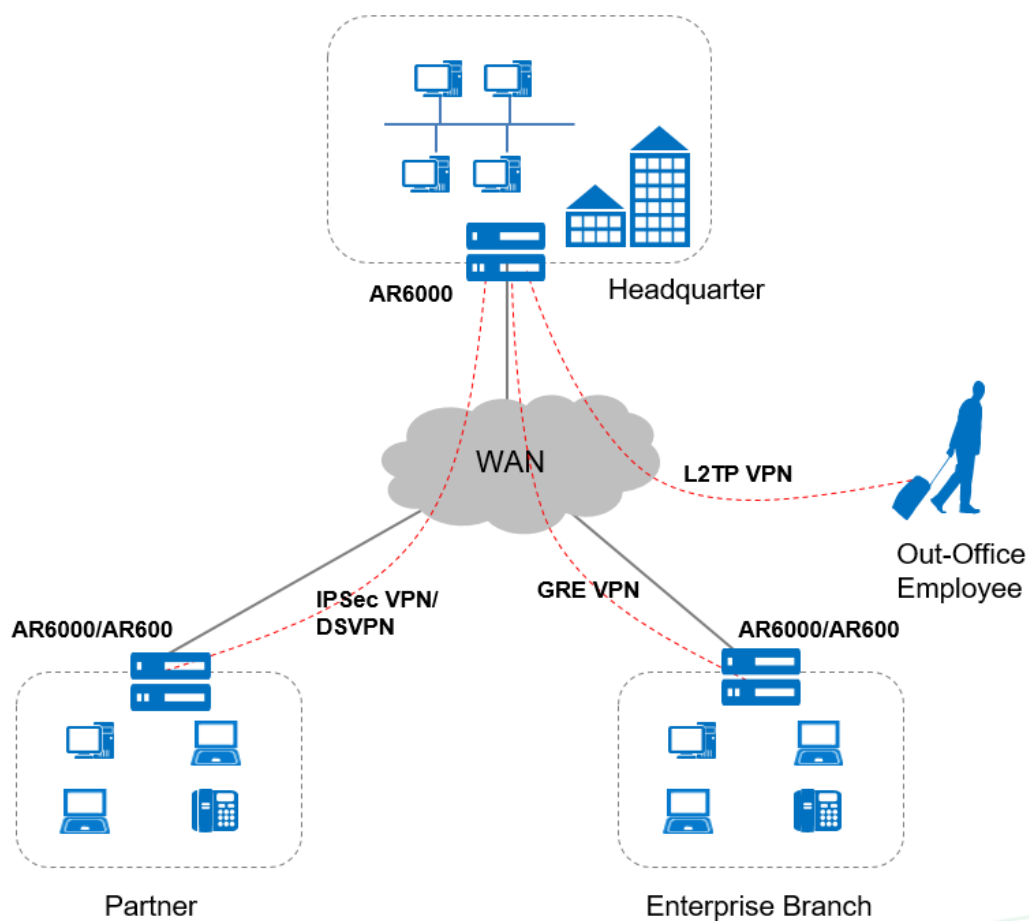

Ordering Information

The AR600 series routers are configured by selecting and installing the appropriate configuration module. The configuration module ordering information and descriptions are shown in the following tables.

License function and description

License Name	Description
Value-Added Data Package	Smart Policy Routing (SPR) is included
Value-Added Security Package	Efficient VPN (EVPN), DSVPN, Smart Application Control (SAC), Any to Any VPN, URL filtering are included.

Ordering components

Chassis Configuration	Description
AR651C	AR651C AC host, 10*GE RJ45,2*GE SFP, 1*USB 3.0, with the AC/DC adapter
License	Description
LAR0DATAE08	AR600 Value-Added Data Package
LAR0SECE08	AR600 Value-Added Security Package

More Information


For more information about Huawei next-generation AR enterprise routers, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang Shenzhen 518129
People's Republic of China
Website: e.huawei.com