



1995-2001 Honda CRV Radio Replacement

This guide explains how to remove the radio in a 1995-2001 Honda CRV.

Written By: Adam Huth




INTRODUCTION

This guide explains how to remove the radio in a 1995-2001 Honda CRV.

TOOLS:

- Phillips #0 Screwdriver (1)

Step 1 — 1995-2001 Honda CRV Radio Replacement

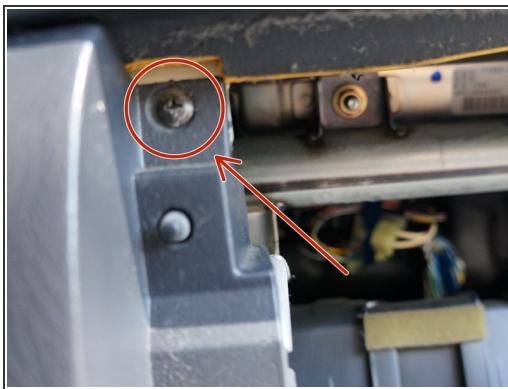

- Remove the clips in the glovebox by pushing them in.
- Remove the 13mm screws holding the glove box frame.

Step 2



- Open the fold-down pocket
- Remove the six 13mm screws attaching the pocket.

Step 3



- Unsnap each side of the trim panel from the center console.

Step 4




- Remove the two screws from the driver-side dashboard.
- Pull the dashboard until it snaps off.

Step 5



- Pull off the center dash.
- Remove the 13mm screws connecting the console to the frame.


Step 6

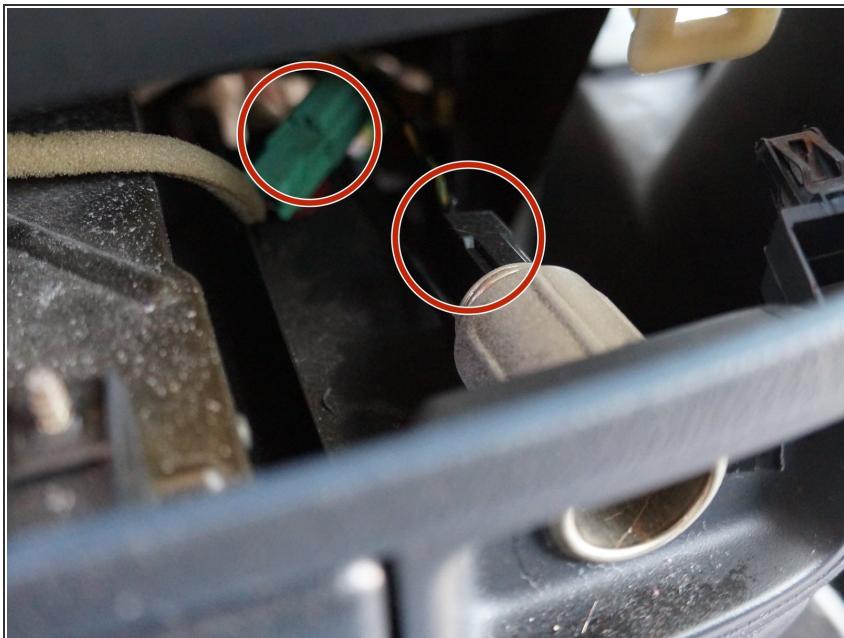

- Unplug the cigarette lighter and A/C Controls.

⚠ Remove the unplugged lighter and controls. Use caution to avoid damaging the wires.

Step 7

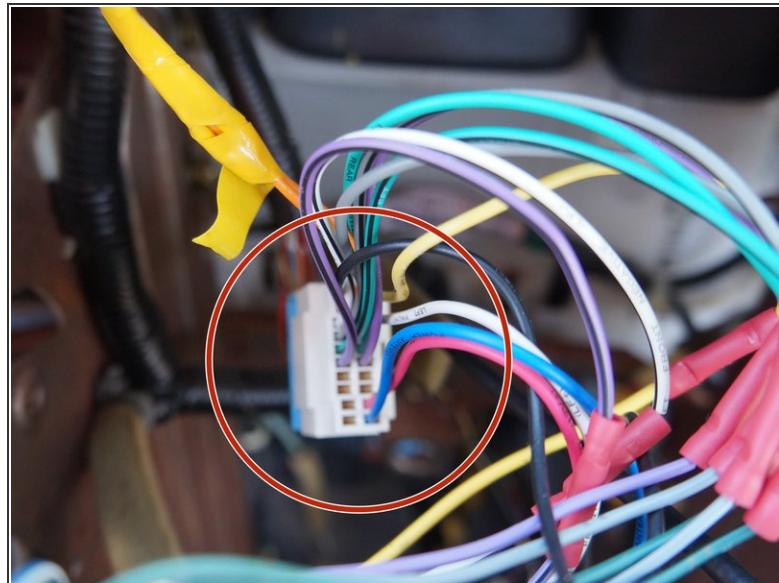

- Remove the console.
- Unclip the radio wires.

To reassemble your device, follow these instructions in reverse order.