



1998-2012 Renault Clio II Battery Replacement

This guide shows how to change the car battery.


Written By: sissssou



 **TOOLS:**

- [8 mm Box End Wrench \(1\)](#)
- [13mm Wrench \(1\)](#)

Step 1 — Battery

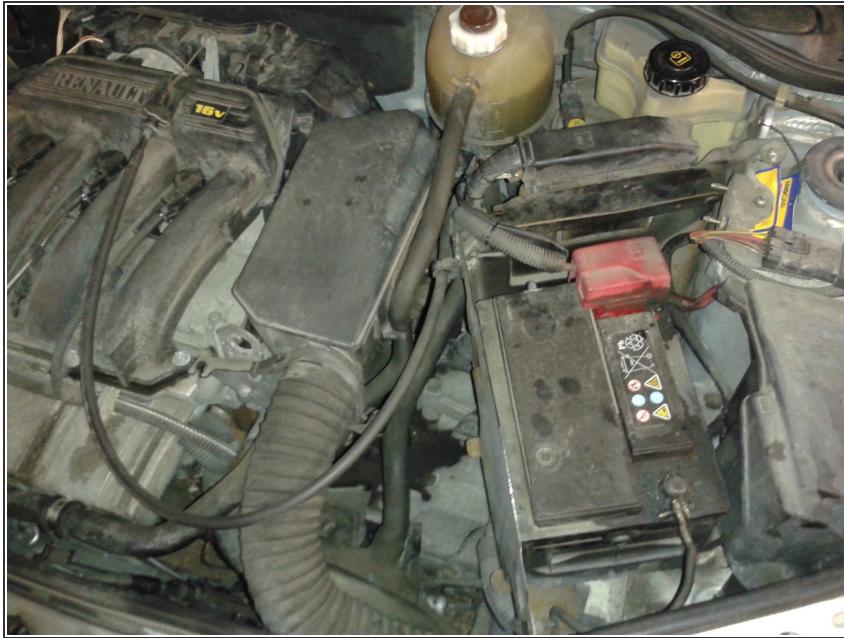


- Stop the car engine.
- Identify the car battery.

Step 2




- Identify the screw on the right side of the battery which maintains the battery.

Step 3

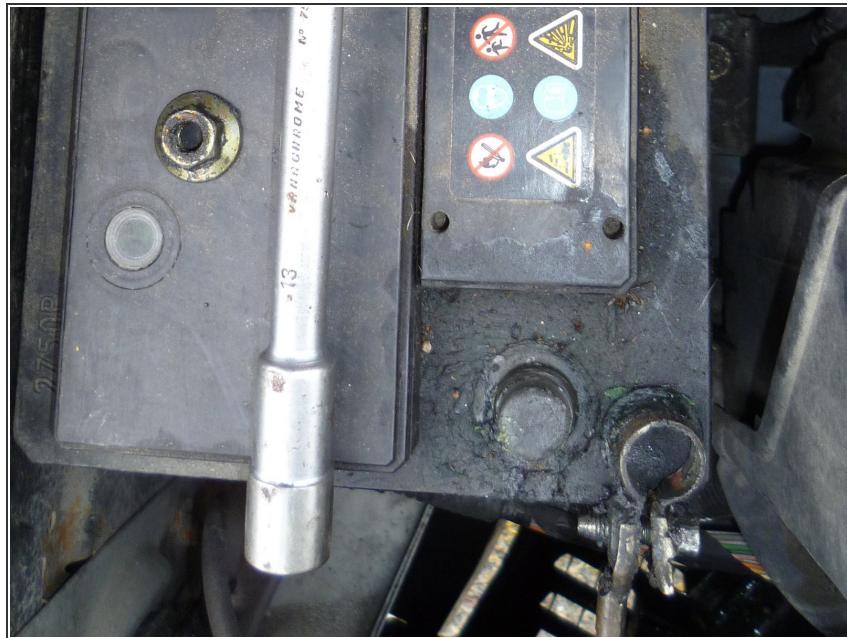

- With the 8mm box end wrench, remove the black (ground) cable.

Step 4

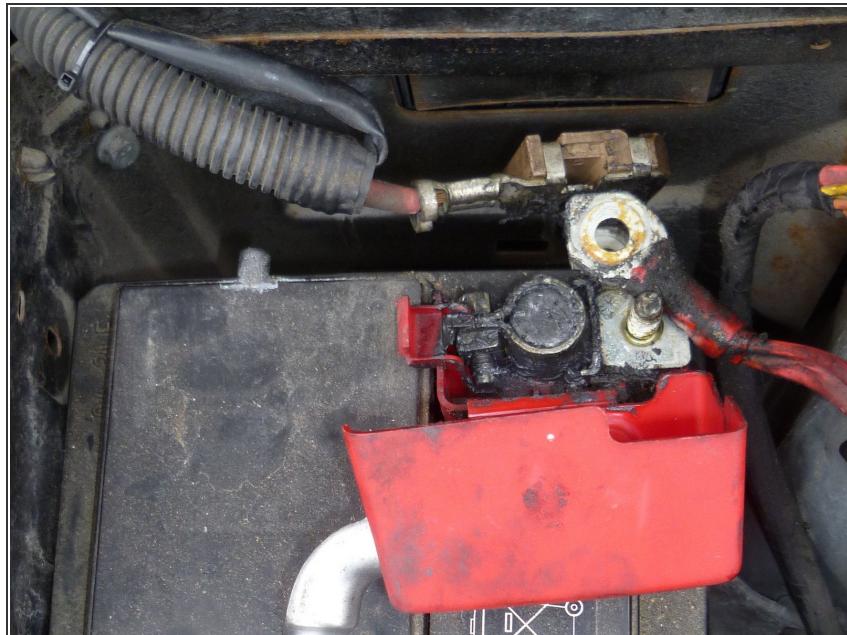

- With the 13mm wrench, remove the red cable.

Step 5



- Unscrew the bottom screw identified in step 2 with the 13mm socket wrench.
- Remove the old battery.

Step 6



- Insert your new battery and lock it with the screw.
- Grease the battery contacts.

Step 7



- Put back the red cable and then the black one.
- Start your car.