



2011-2013 Scion tC Radio Head Unit Replacement

How to replace the radio head unit

Written By: Dylan Smith



INTRODUCTION

This guide will teach how to safely remove and replace the radio head unit of the car.

TOOLS:



- Phillips #1 Screwdriver (1)

Step 1 — Radio Head Unit



- Remove the dashboard panel around the radio head by pulling on the bottom of the unit.

Step 2

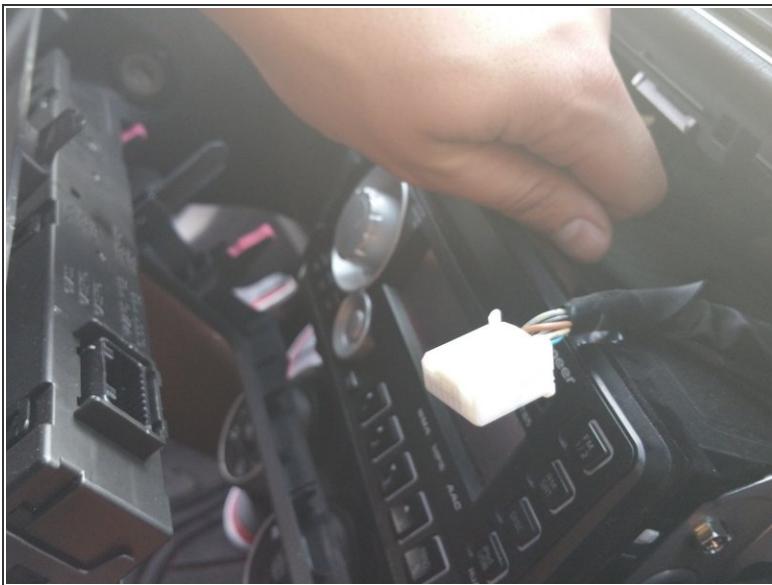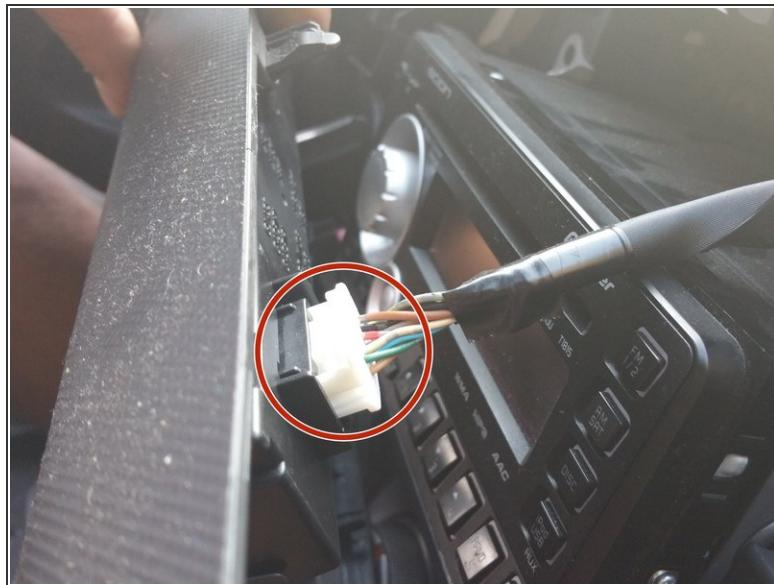

- Remove the wire header connected to the panel by pressing inward on the tabs.

Step 3



- Remove the four #2 12mm screws securing the head unit in the housing

Step 4



- Remove each bundle of wires that is connected to the back of the head unit.

Step 5



- Locate the metal brackets on the side of the head unit.
- Use a Philips head screwdriver, remove the three #2 25mm screws from both support brackets on the side of the head unit

Step 6



- Screw the support brackets to the new radio head unit

(i) Note that the brackets are unique to the car. They will not come with your new head unit.

To reassemble your device, follow these instructions in reverse order.