




# 4Sight 9 Battery Replacement

This guide will provide a step by step process to locate and remove the battery for the 4Sight.

Written By: Jack Applegate

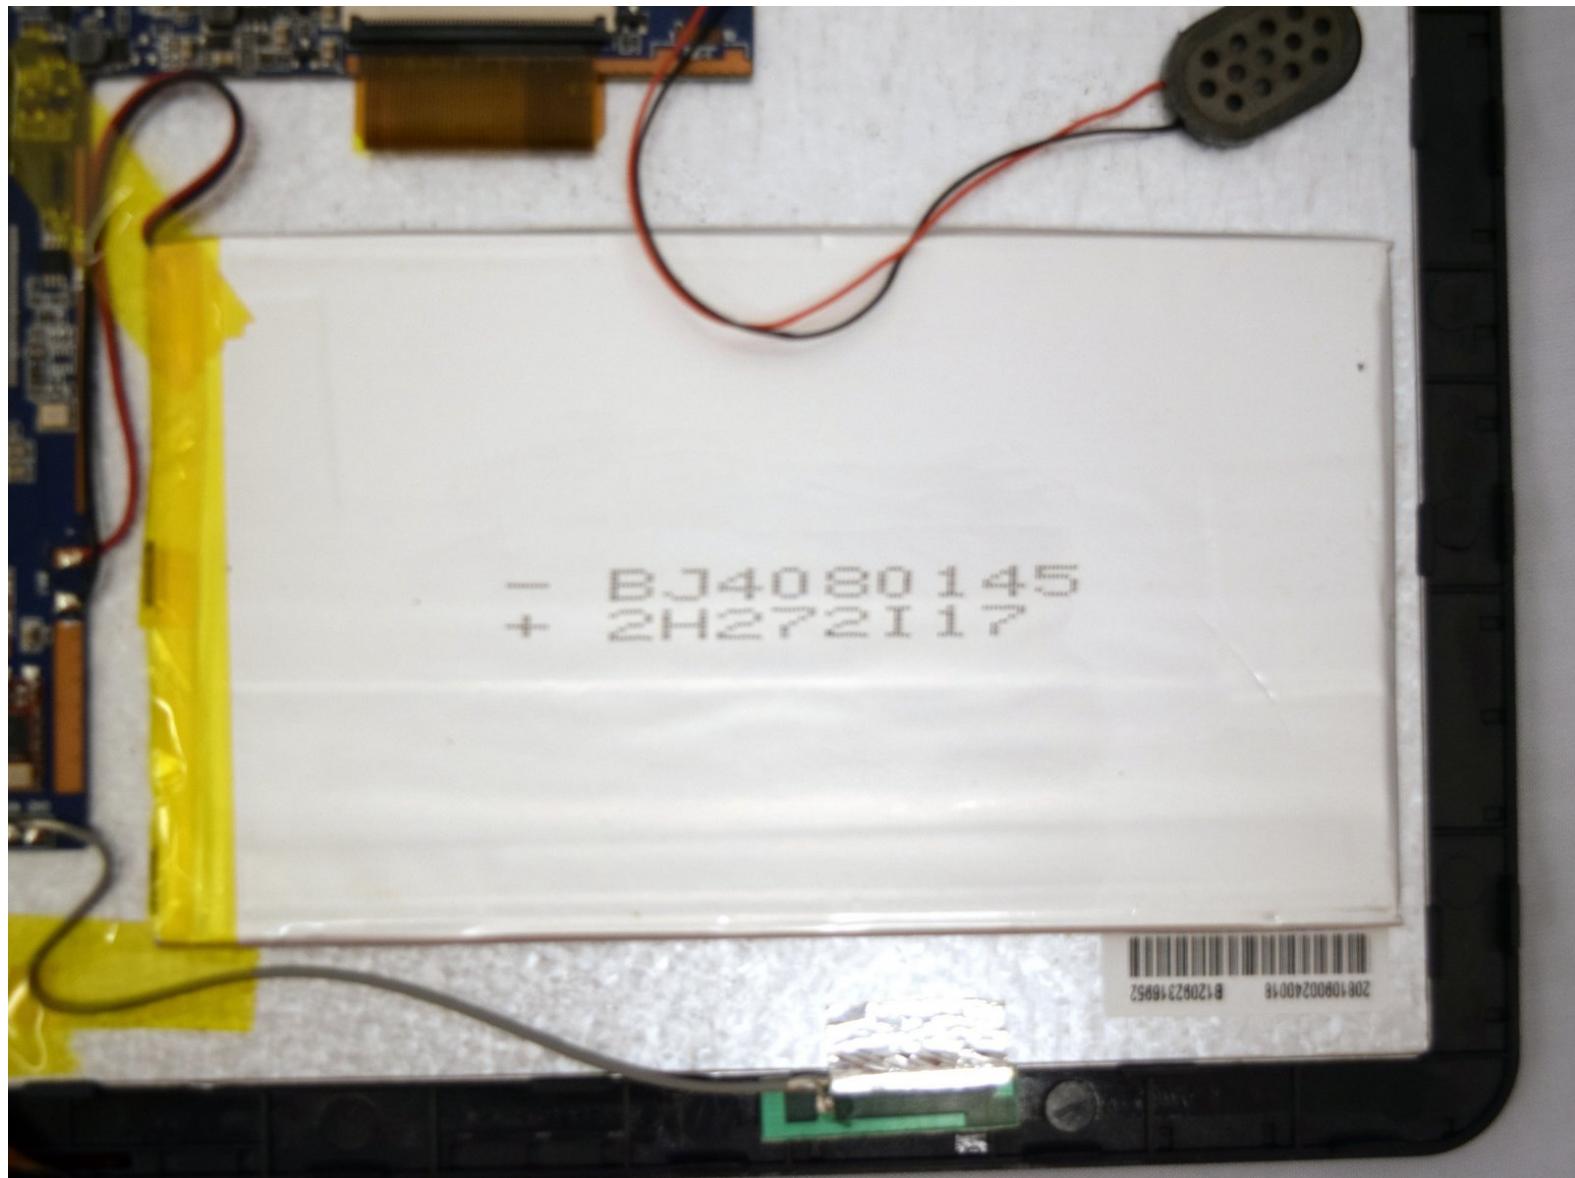

## INTRODUCTION

Use this guide to replace the battery on the 4Sight 9

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Soldering Iron](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Cover




- Take tablet and rotate on its side, so that the two screws are facing upward.
- Use Phillips #00 Screwdriver to remove two 1mm screws on the left side of the tablet.

## Step 2



- Insert plastic prying tool and pry back case away from the device slowly moving the plastic prying tool along the device.
- Once loosened, use hands to help separate case from device.


## Step 3

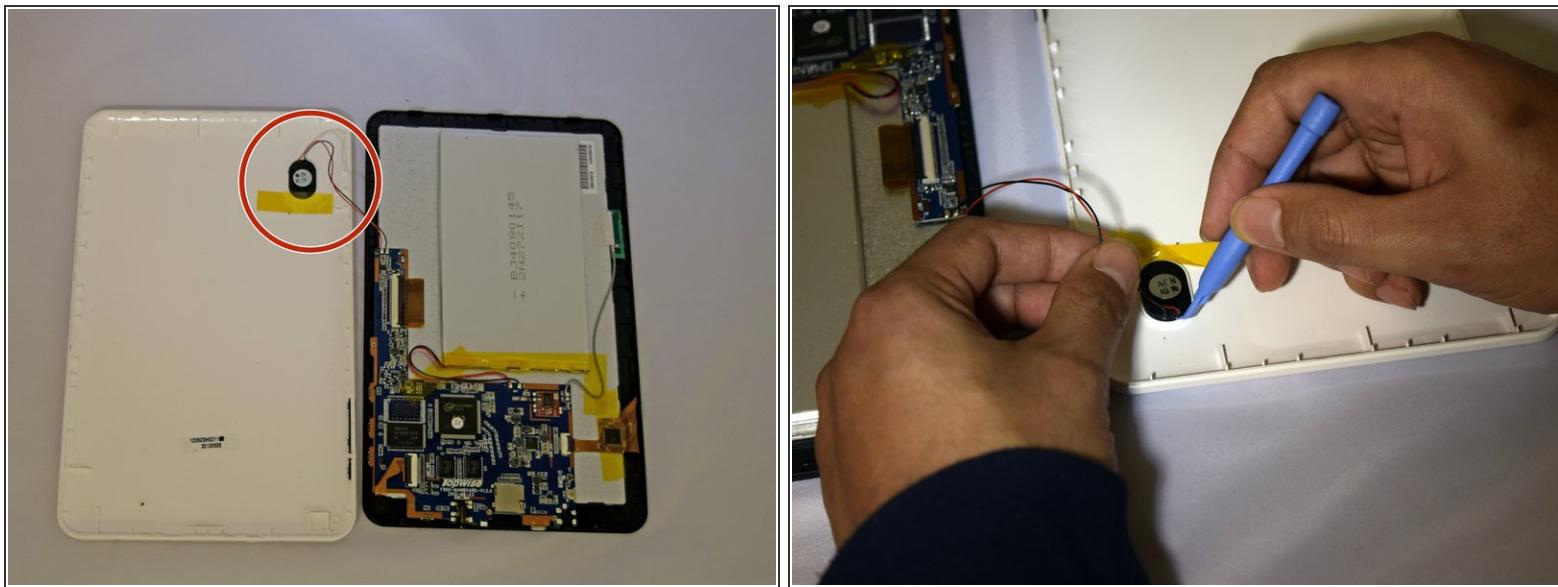

- Hold positive and negative wires as close as possible to the speaker.
- Use plastic prying tool and fingers to simultaneously lift speaker from cover.

① Set cover aside.


## Step 4 — Battery

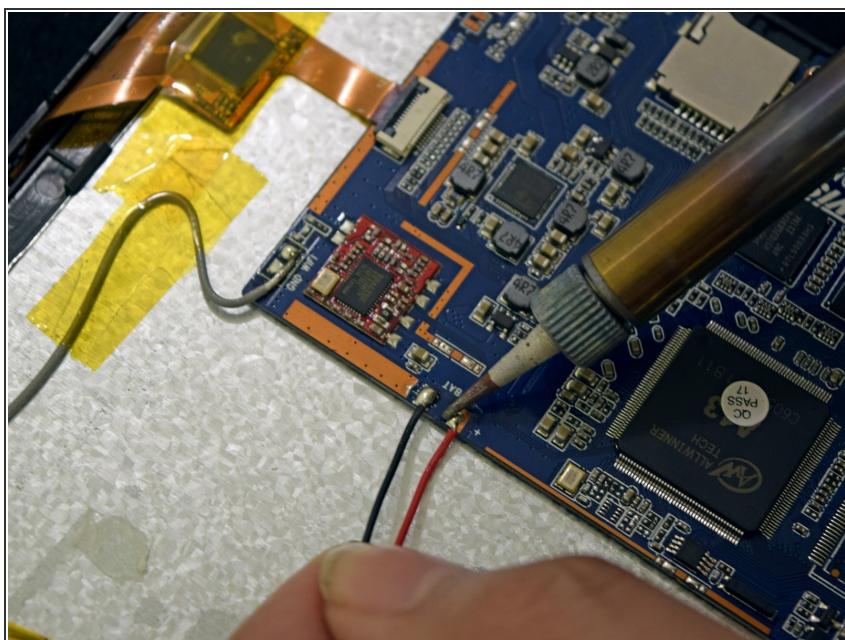

- Use soldering gun to remove the positive and negative wires connecting the battery to the circuit board.

① For a complete guide on how to solder, [click here](#).

## Step 5

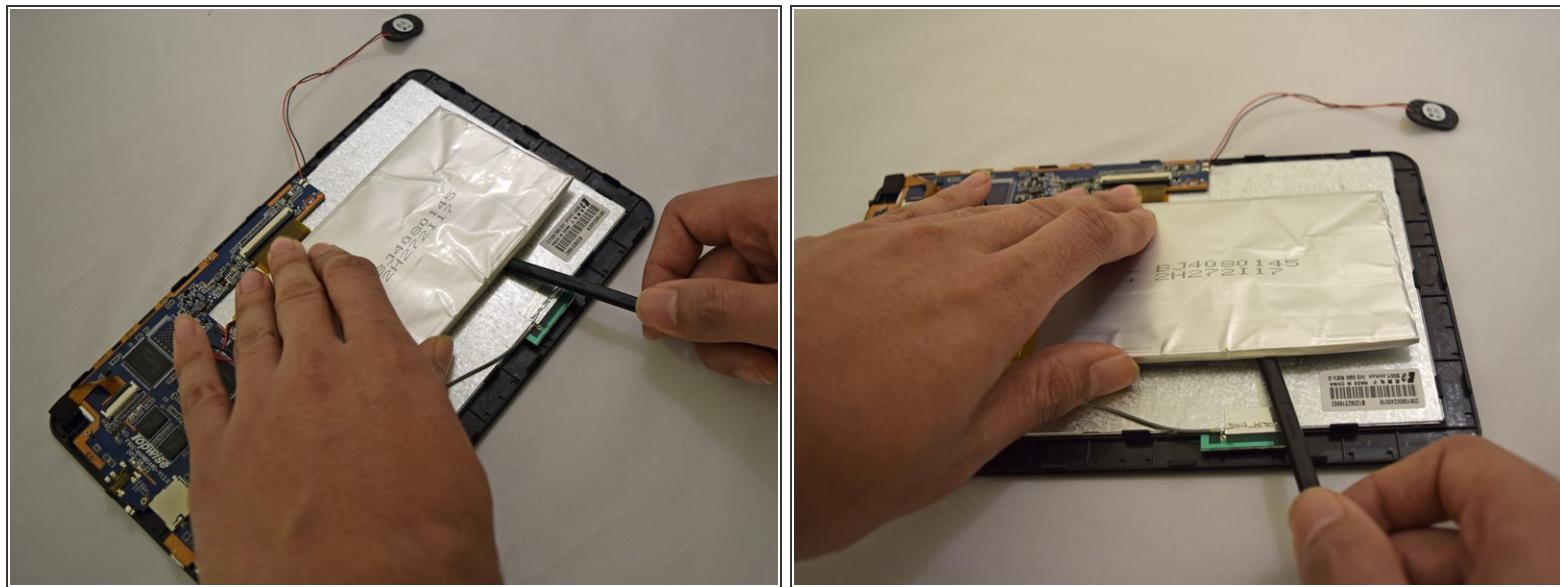

- Insert plastic prying tool under upper-hand corner of battery and slide back and forth.
- Once loosened, insert plastic prying tool under lower-hand corner and repeat sliding action.

*(i)* Repeat previous actions until battery comes loose from device.

To reassemble your device, follow these instructions in reverse order.