



AEG Öko_Lavamat 1571 Shock Absorber Replacement

Replace the two shock absorbers of the washing drum

Written By: Michael S.




 **TOOLS:**

- Phillips 3 Screwdriver (1)
- 8mm Allen Socket (1)

 **PARTS:**

- New Item (2)




Step 1 — Remove upper lid

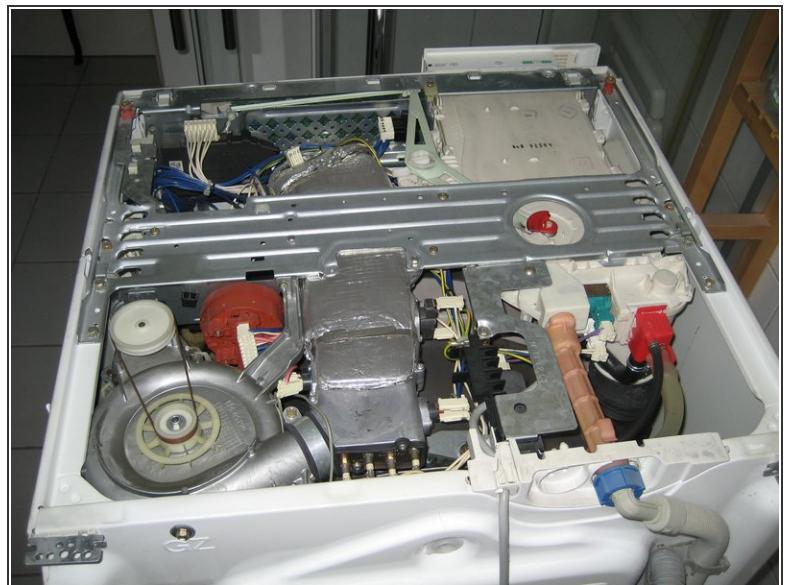

Unplug the power plug !!!

- Loosen the water and sewage hose
- Remove screws securing the top cover
- Lift the lid at the back and slide it out to the rear

Step 2 — Prepare removal of the rear housing part

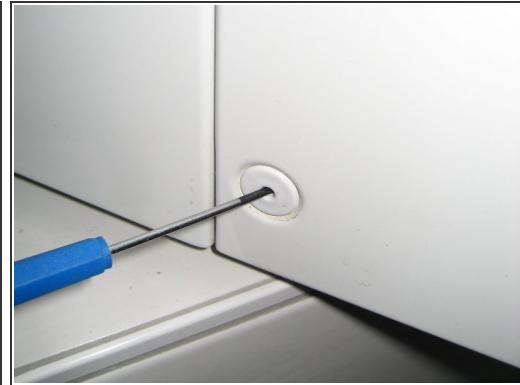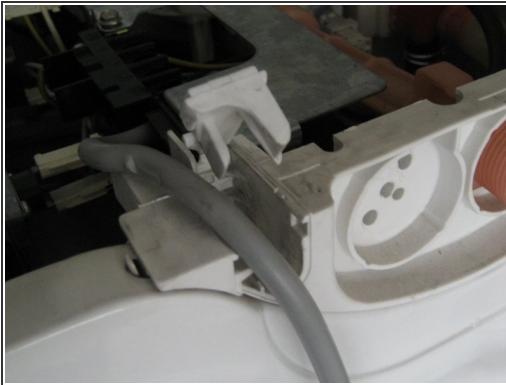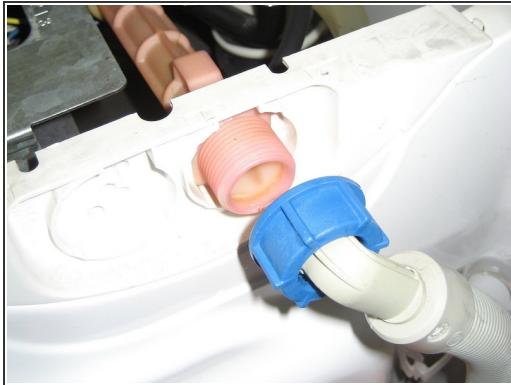

- Remove water hose
- Disconnect the power plug
- Remove plastic caps at the bottom right + left

Step 3 — Remove rear housing



- Remove screws according to pictures (and only these !!!)
- Remove rear housing part

 Caution: The rear housing part is part of the load-bearing structure! The case is now slightly twisted.

Step 4 — Shock absorber replacement



- The shock absorbers are situated to the right and to the left. The right one is extremely difficult to access.
- To remove the pins, the lock must be pressed down at the front end.
- The installation position is marked on the shock absorber.

Repeat the steps in reverse order to reassemble your device.