



# ASUS Eee PC 900HD Key Board Replacement

When your keyboard has gotten dirty or not working correctly, a replacement might come in hand.

For this replacement you will need a few tools and be prepared to work gently.

Written By: Kendall Marie Mehlhorn



## INTRODUCTION

This guide will teach you how to properly take apart your Asus to replace the keyboard.

### TOOLS:

- [Spudger \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Key Board





- Open the laptop so that you can see the keyboard.
- Unlock the three keyboard tabs by pushing down on the silver tabs with a Spudger.

## Step 2




- With the plastic opening tool, you will carefully lift up the keyboard.

## Step 3

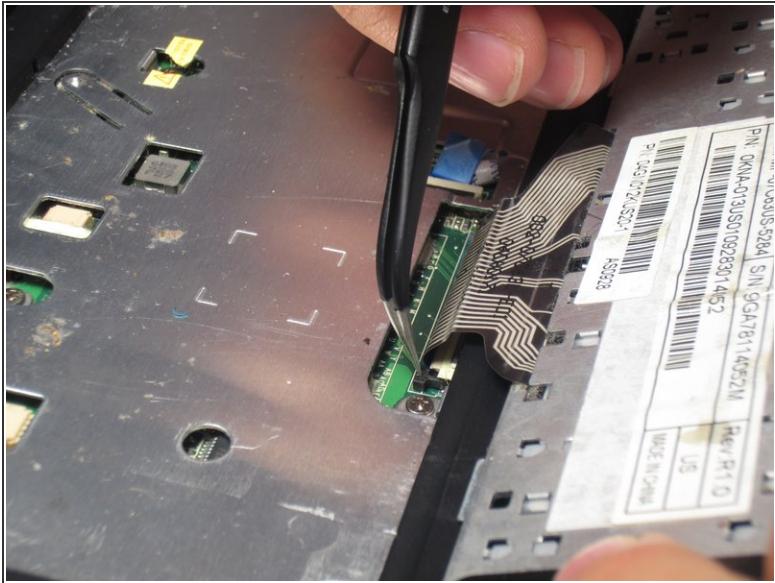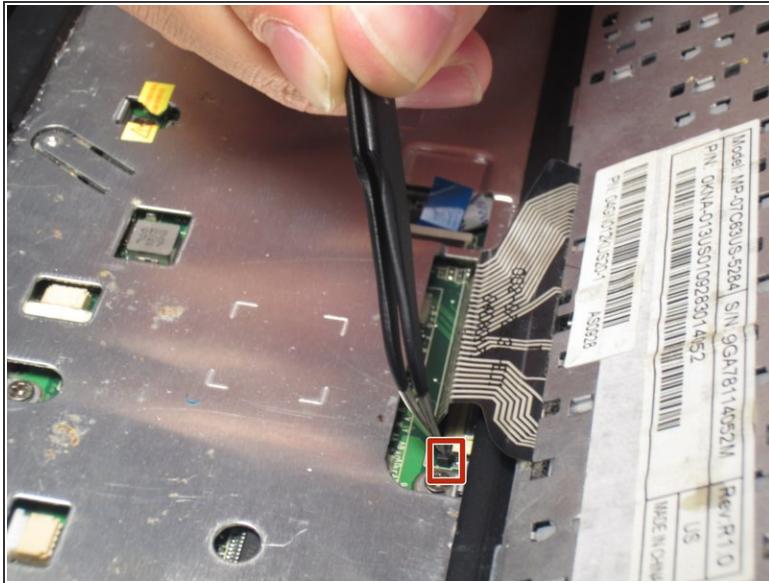

- Using a pair of tweezers, disconnect the cable at the bottom of the keyboard by flipping the two lock switches up on both sides of the cable.

## Step 4

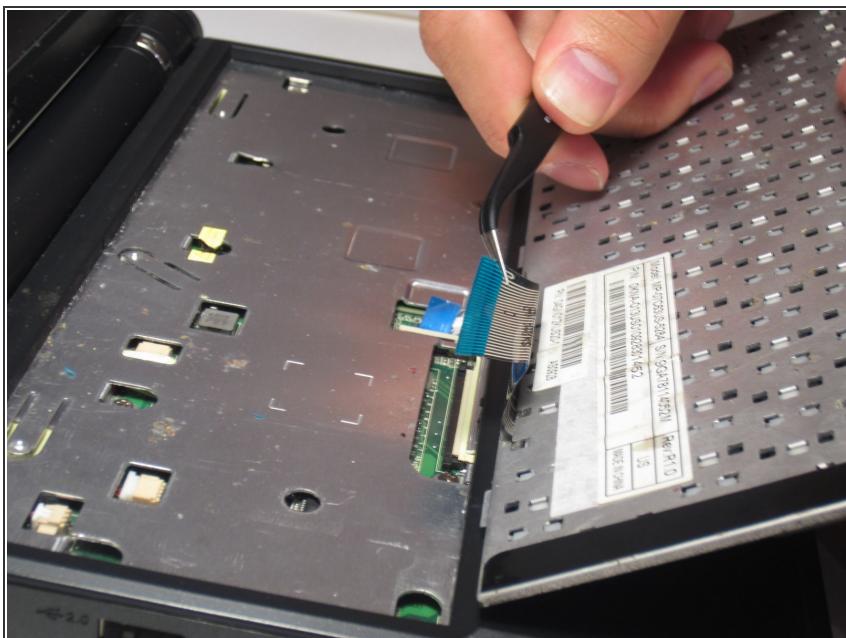

Carefully pull the cable out.

- You are now able to disconnect the keyboard from its origin.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-10-01 12:04:35 PM (MST).

