ASUS N550JK-DS71T Laptop Back Case Replacement

How-to guide to remove and replace the back case of the device.

Written By: Steven Hahn

This document was generated on 2019-11-07 04:28:38 PM (MST).

INTRODUCTION

This guide will detail how to remove and replace the back case of the device. This will give you access to the inner parts of the laptop.

🔧 TOOLS:

- T5 Torx Screwdriver (1)
- Spudger (1)

This document was generated on 2019-11-07 04:28:38 PM (MST).

© iFixit — CC BY-NC-SA   www.iFixit.com   Page 2 of 4

Step 1 — Back Case
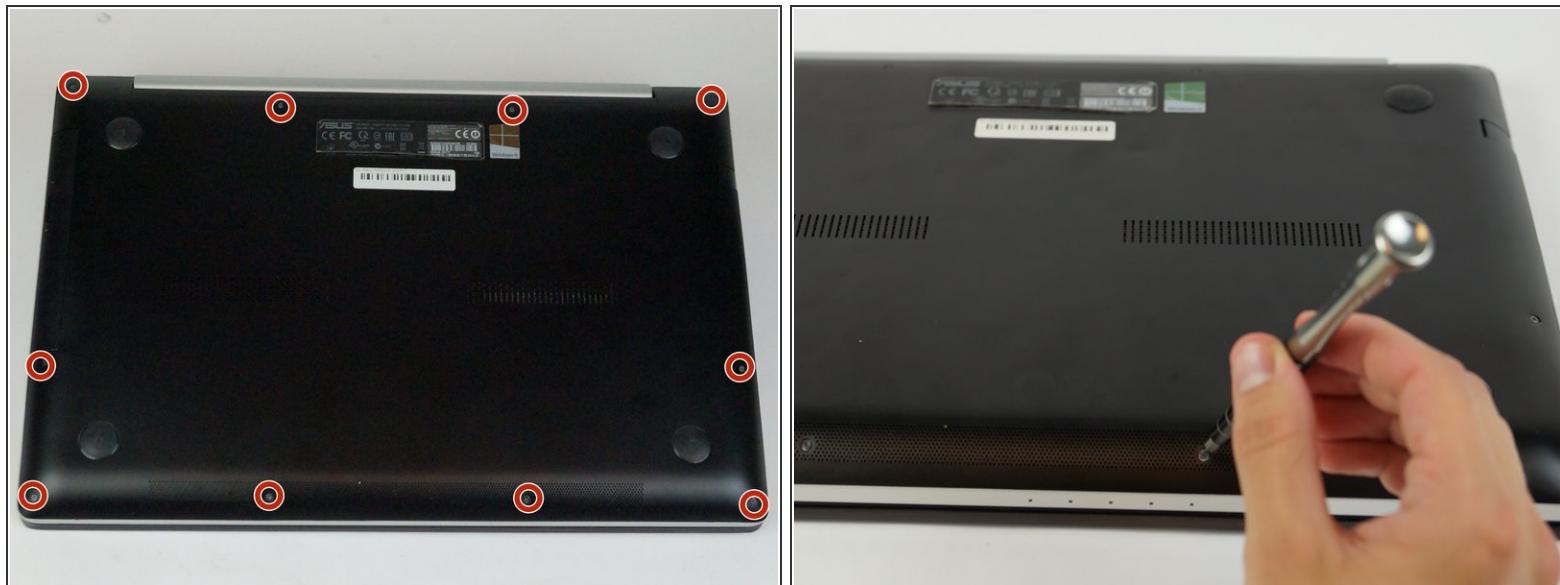
- Turn the laptop off and unplug all cables.

- Flip over so the bottom is facing you.

- Remove the ten 3mm Torx T5 screws from the bottom cover.

This document was generated on 2019-11-07 04:28:38 PM (MST).

© iFixit — CC BY-NC-SA | www.iFixit.com | Page 3 of 4

Step 2
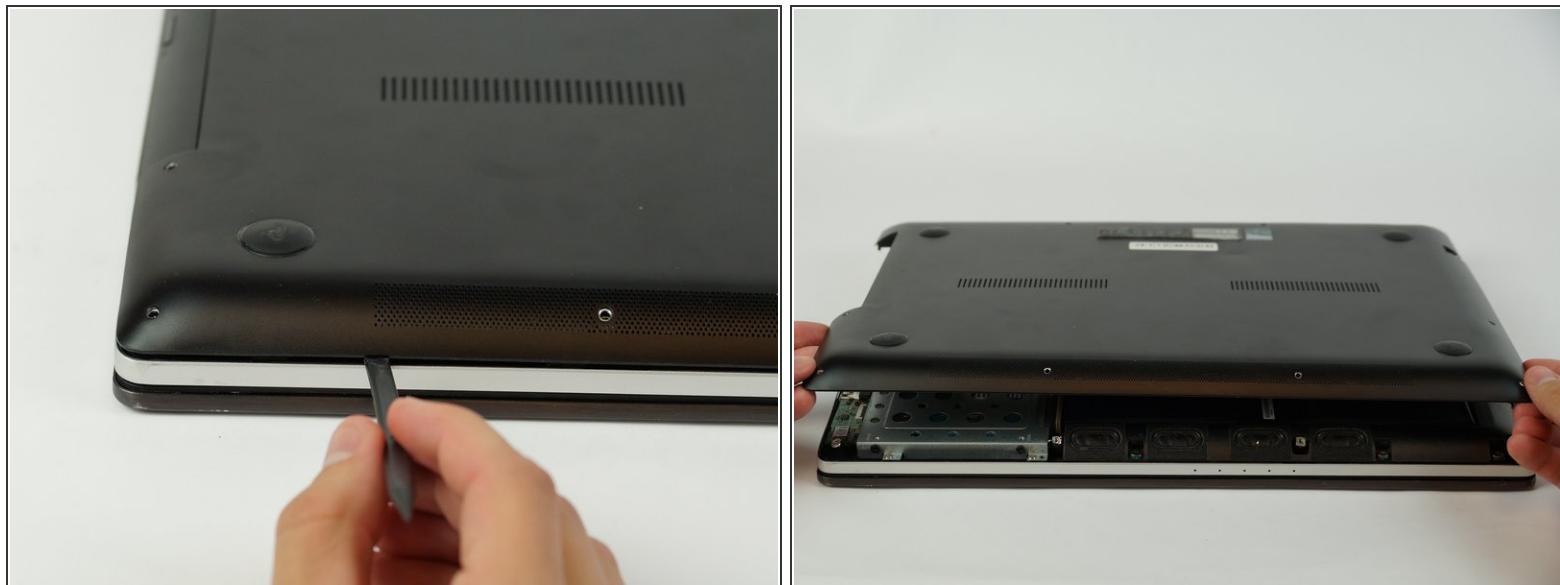
- Use a spudger to wedge between the laptop and bottom cover—lift upwards to pry open.

- Run the spudger along the perimeter of the bottom cover to remove.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-11-07 04:28:38 PM (MST).