ASUS PadFone X Battery Replacement

Replace the battery from your PadFone X.

Written By: John Kue

INTRODUCTION

Replace the battery from your PadFone X.

🔧 TOOLS:

- iFixit Opening Tools (1)
- T5 Torx Screwdriver (1)

Step 1 — Remove the back panel.

- Using the blue plastic opening tool, insert the tip into the crease between the back cover and the phone and pry it upwards.

- Work your way around the phone until the entire back cover is loose.

Step 2 — Remove the screws.

- Remove the 13 - 3.6 mm screws using the Torx T5 bit in the screwdriver.
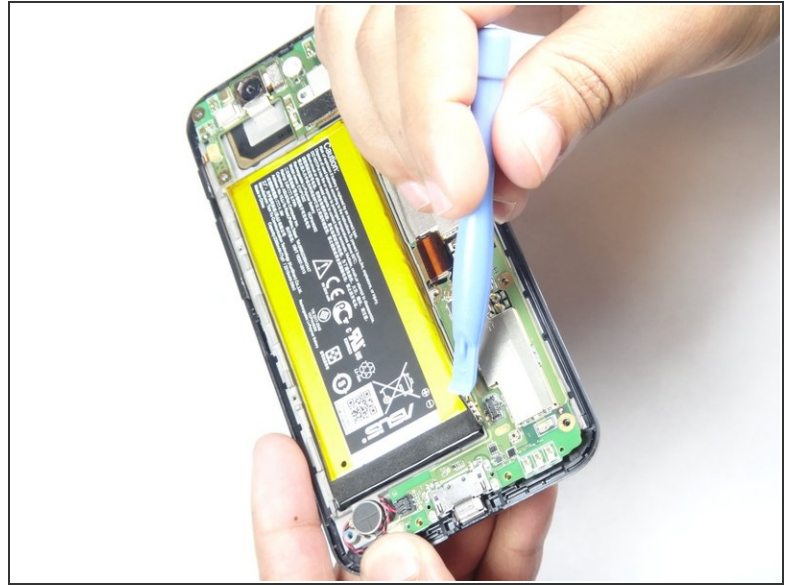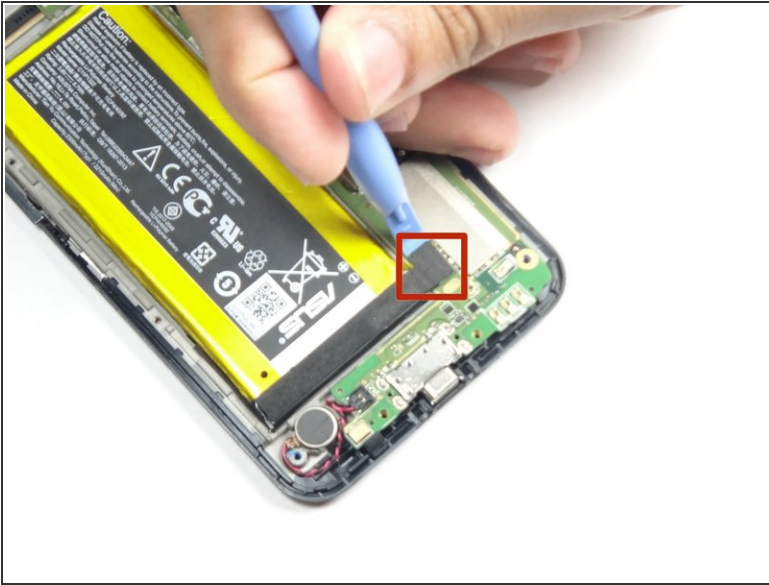
This document was generated on 2019-09-22 05:19:37 AM (MST).

Step 3 — Remove the Mid-Frame

- Using the blue plastic opening tool, insert the tip into the crease between the mid-frame and the phone and pry it upwards.

- Work your way around the phone until the entire back cover is loose and remove the mid-frame.
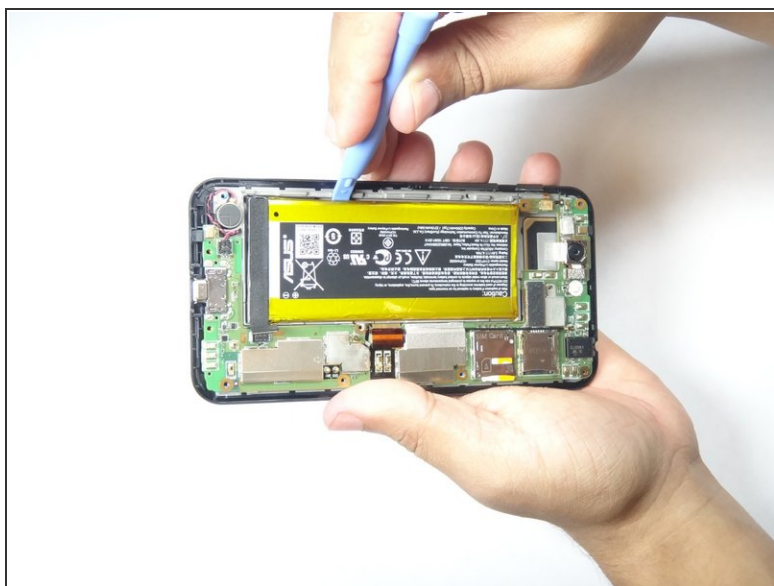
Step 4 — Remove the Battery Connector

- Using the blue plastic opening tool, gently disconnect the battery cable from the motherboard.

⚠️ Applying too much force may damage the connector.

This document was generated on 2019-09-22 05:19:37 AM (MST).

© iFixit — CC BY-NC-SA

www.iFixit.com

Page 5 of 6

Step 5 — Remove the battery.

- Use the blue plastic opening tool to pry the battery pack from the phone. Pry along edge away from the motherboard as this might damage the motherboard.

- The battery pack is held on by double sided tape, you will have to apply some force when prying out the battery.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-22 05:19:37 AM (MST).