



ASUS Q302L Back Case Replacement

Written By: Kerolus Gerges




INTRODUCTION

Prerequisite Only

TOOLS:

- Phillips #0 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Back Case

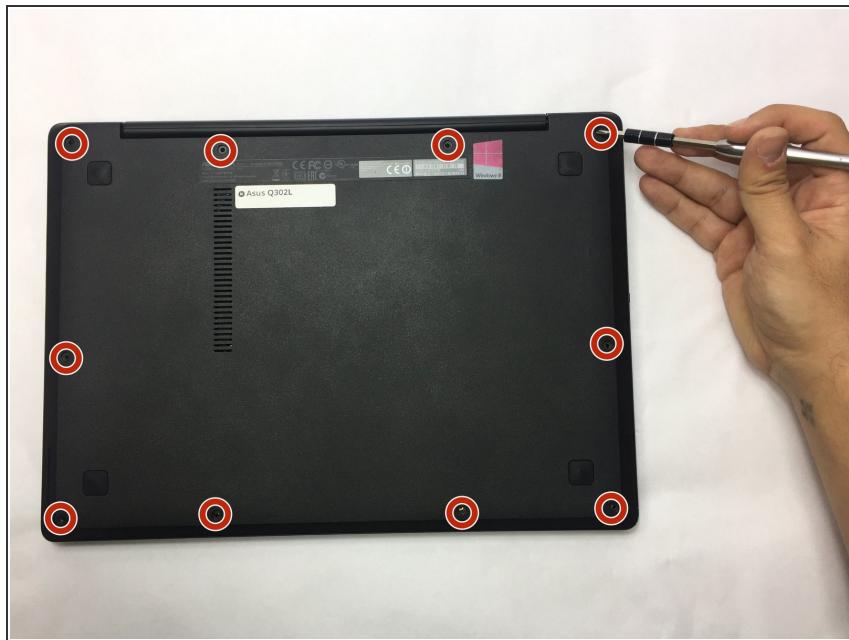

⚠ Make sure the laptop is disconnected from a power supply and is TURNED OFF.

- Use a Phillips #0 screw driver to remove all ten 10 mm screws around the back of the laptop.

Step 2



- Wedge a plastic opening tool under the rear case near the hinge.
- Pry around the outer edge to release the plastic clips holding the rear case to the laptop.

Step 3



- Once the cover is free from all the clips, remove the cover from the laptop.

To reassemble your device, follow these instructions in reverse order.