



ASUS VivoTab Note 8 Motherboard Replacement

Learn how to remove and replace the motherboard of an ASUS VivoTab Note 8.

Written By: Ryan Spencer



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

Step 1 — Back Panel



- First take the pen out, it may get in the way when you are opening the device. If you have a memory card, you should also remove it.
- Use the plastic opening tool to pry open the edges of the cover. The memory card slot is very useful for getting started.

Step 2

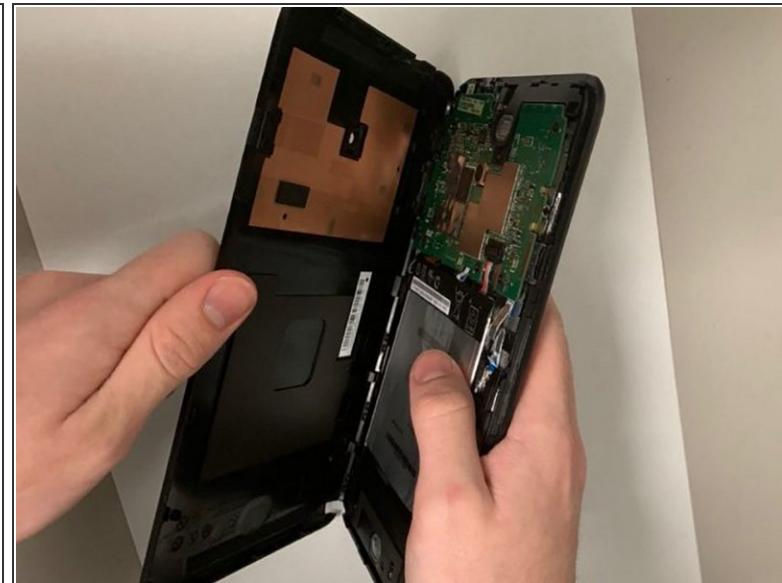

- Move the opening tool along the edges of the tablet and push up wherever you can. You may need to open up all of the sides to take the panel off.
- Then pull apart the sides of the casing.

Step 3



- After pulling the panel off, put it to the side.

Step 4 — Motherboard




- Unplug the battery from the motherboard.
- *i* Lodge something (a fingernail works fine) under the connecting piece and apply a force straight up - perpendicular to the back of the device.

Step 5




- Remove the screws from the black plastic restraint restricting the motherboard's movement. To accomplish this, use a Phillips #000 screwdriver.
- Gently remove the black plastic restraint from the motherboard.

Step 6

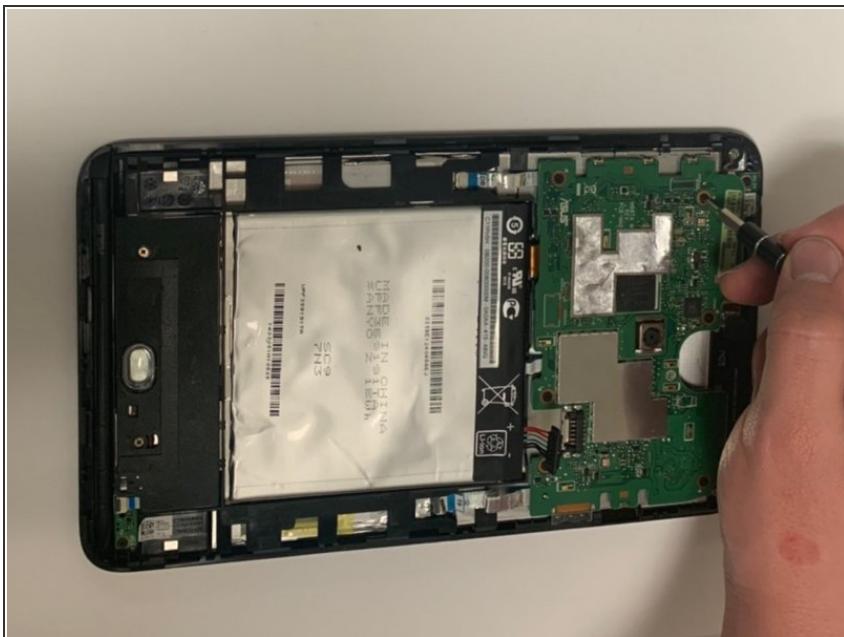

- Unscrew the 6 screws holding the motherboard in place using a Phillips #000 screwdriver.

Step 7

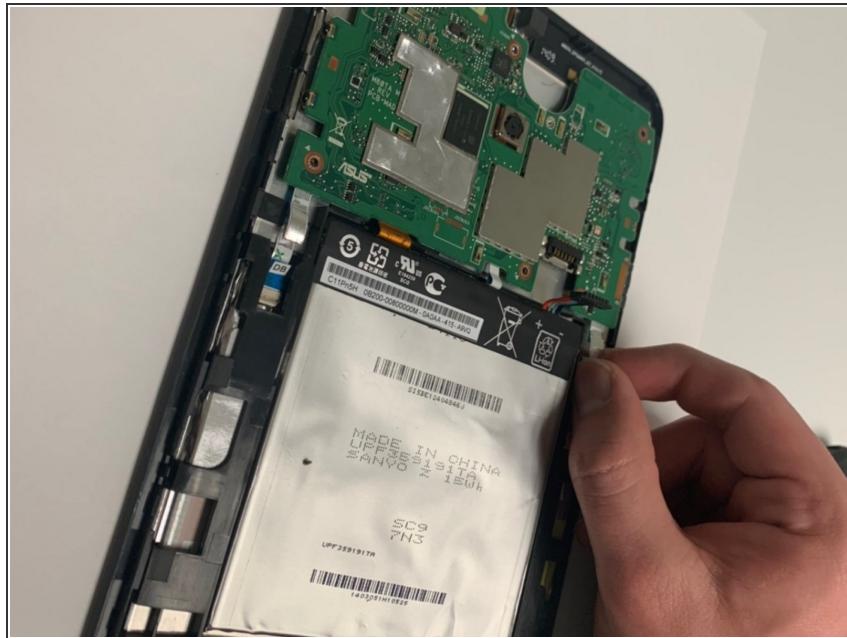

- Gently pull out the remaining ribbons and cords still plugged into the motherboard.

Step 8



- Pull out the motherboard.

To reassemble your device, follow these instructions in reverse order.