



AT&T NVG510 Button Replacement

Replace buttons on your NVG510 modem.

Written By: Shawn Rogers



INTRODUCTION

This guide will show you how to replace buttons on the NVG510 modem.



TOOLS:

- [Solder](#) (1)
 - [Screwdriver](#) (1)
 - [2.0 flathead bit](#) (1)
-

Step 1 — Reset and Wi-Fi Buttons




- Flip the router over so the stickers are facing upward.
- Remove rubber stands from the left corner only

Step 2





- Take out both screws using the bit driver and 2.0 flathead

Step 3

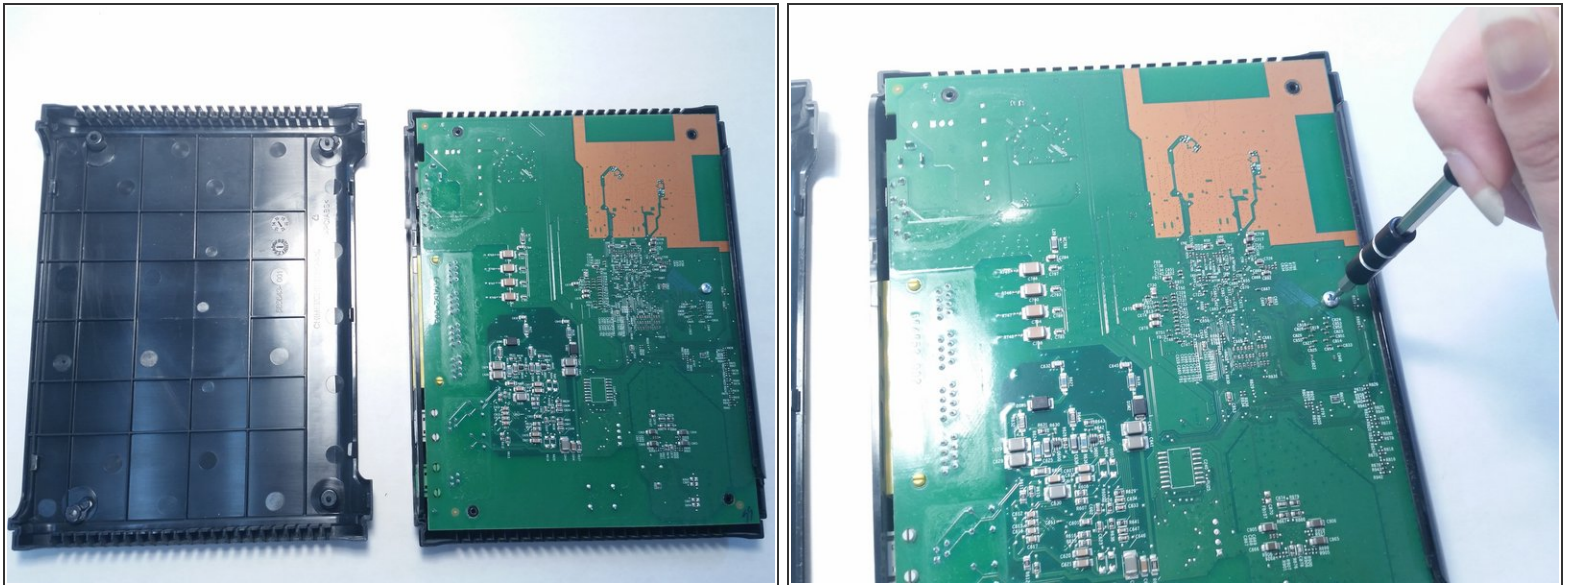


- The case should now be open and the board should be revealed
- Take out the one screw located on the middle left of the board
- ⓘ It may take some force to open the case

Step 4

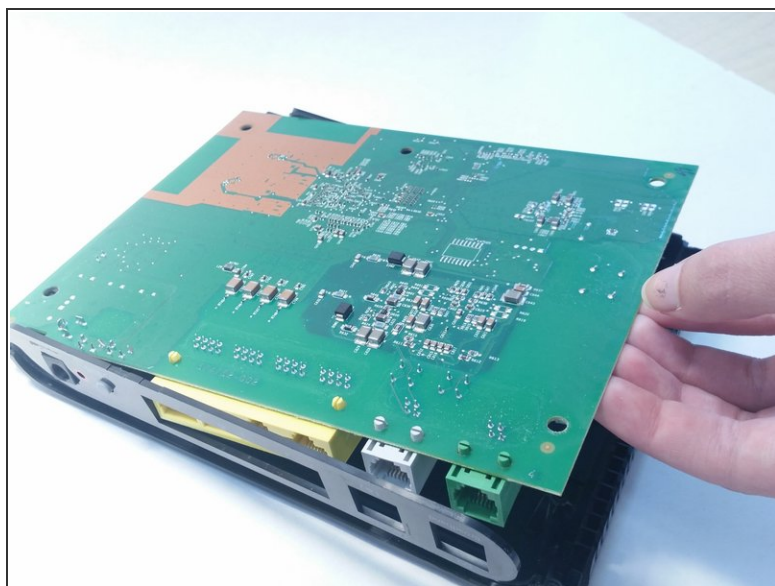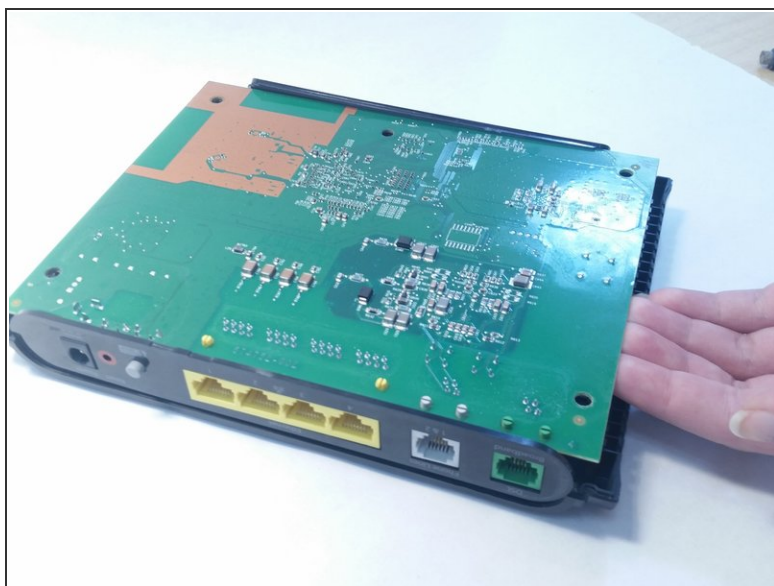


- Lift the board out of the case
- ⓘ Lift up slowly to ensure there will be no damage to the board

Step 5

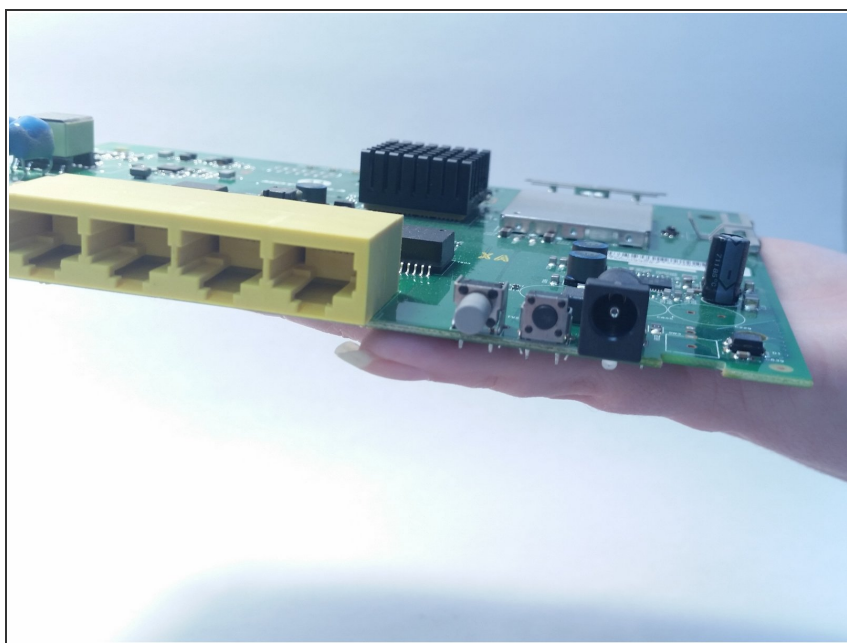

- Locate the buttons near the yellow ports, they are to the right of the ports.

Step 6

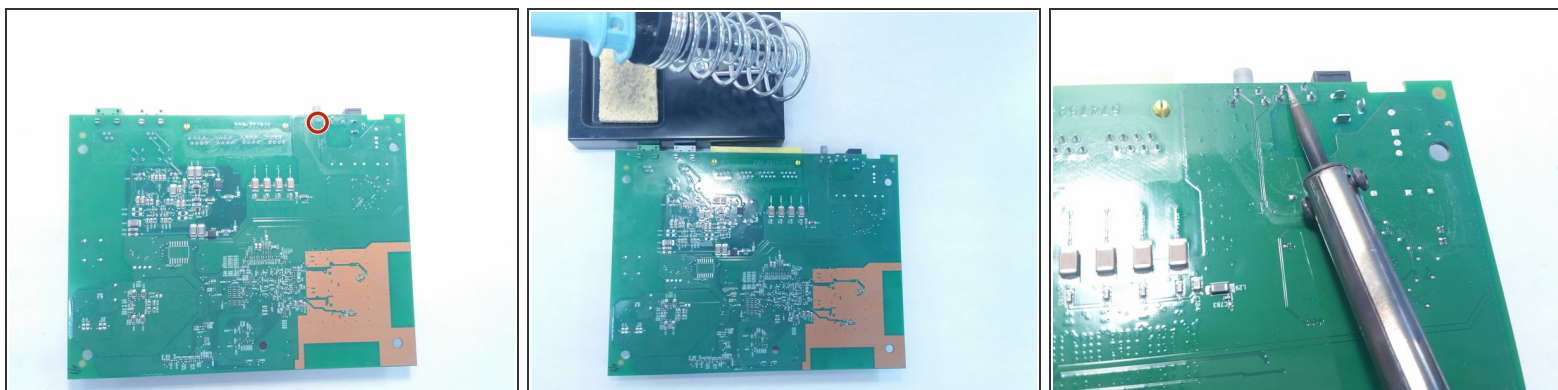

- Using a solder, locate the silver points
- Heat up the silver points to melt them off to release the button from the board

⚠ Avoid contact with the board with the solder, only touch the silver points

To reassemble your device, follow these instructions in reverse order.