



ATT CL2940 Back Panel Disassembly

This guide will give the user instructions in how to remove the back panel of the phone.

Written By: Charles Messmore



INTRODUCTION

To get to many components in the phone, one must remove the back panel. This guide will serve as a first step in replacing most of the components.

TOOLS:

- [Metal Spudger Set](#) (1)
- [Pro Tech Toolkit](#) (1)

Step 1 — Back Panel



- Remove five 9.5 mm Phillips #1 screws from the back panel of the phone.


Step 2



- Slide metal spudger into the crack around the Front Panel of the phone

⚠ Be careful not to break the clips holding the Back Panel to the Front Panel

Step 3

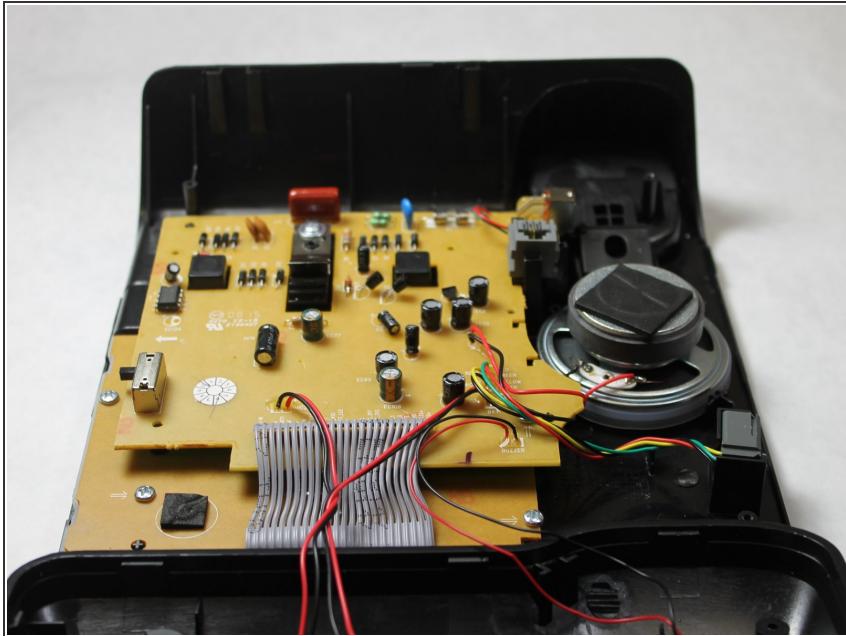

 When setting the back panel down, be careful to not rip any of the wires off of the internal components

To reassemble your device, follow these instructions in reverse order.