




# ATT EL52300 Motherboard Replacement

Replace the motherboard of the handset.

Written By: Nam Mai

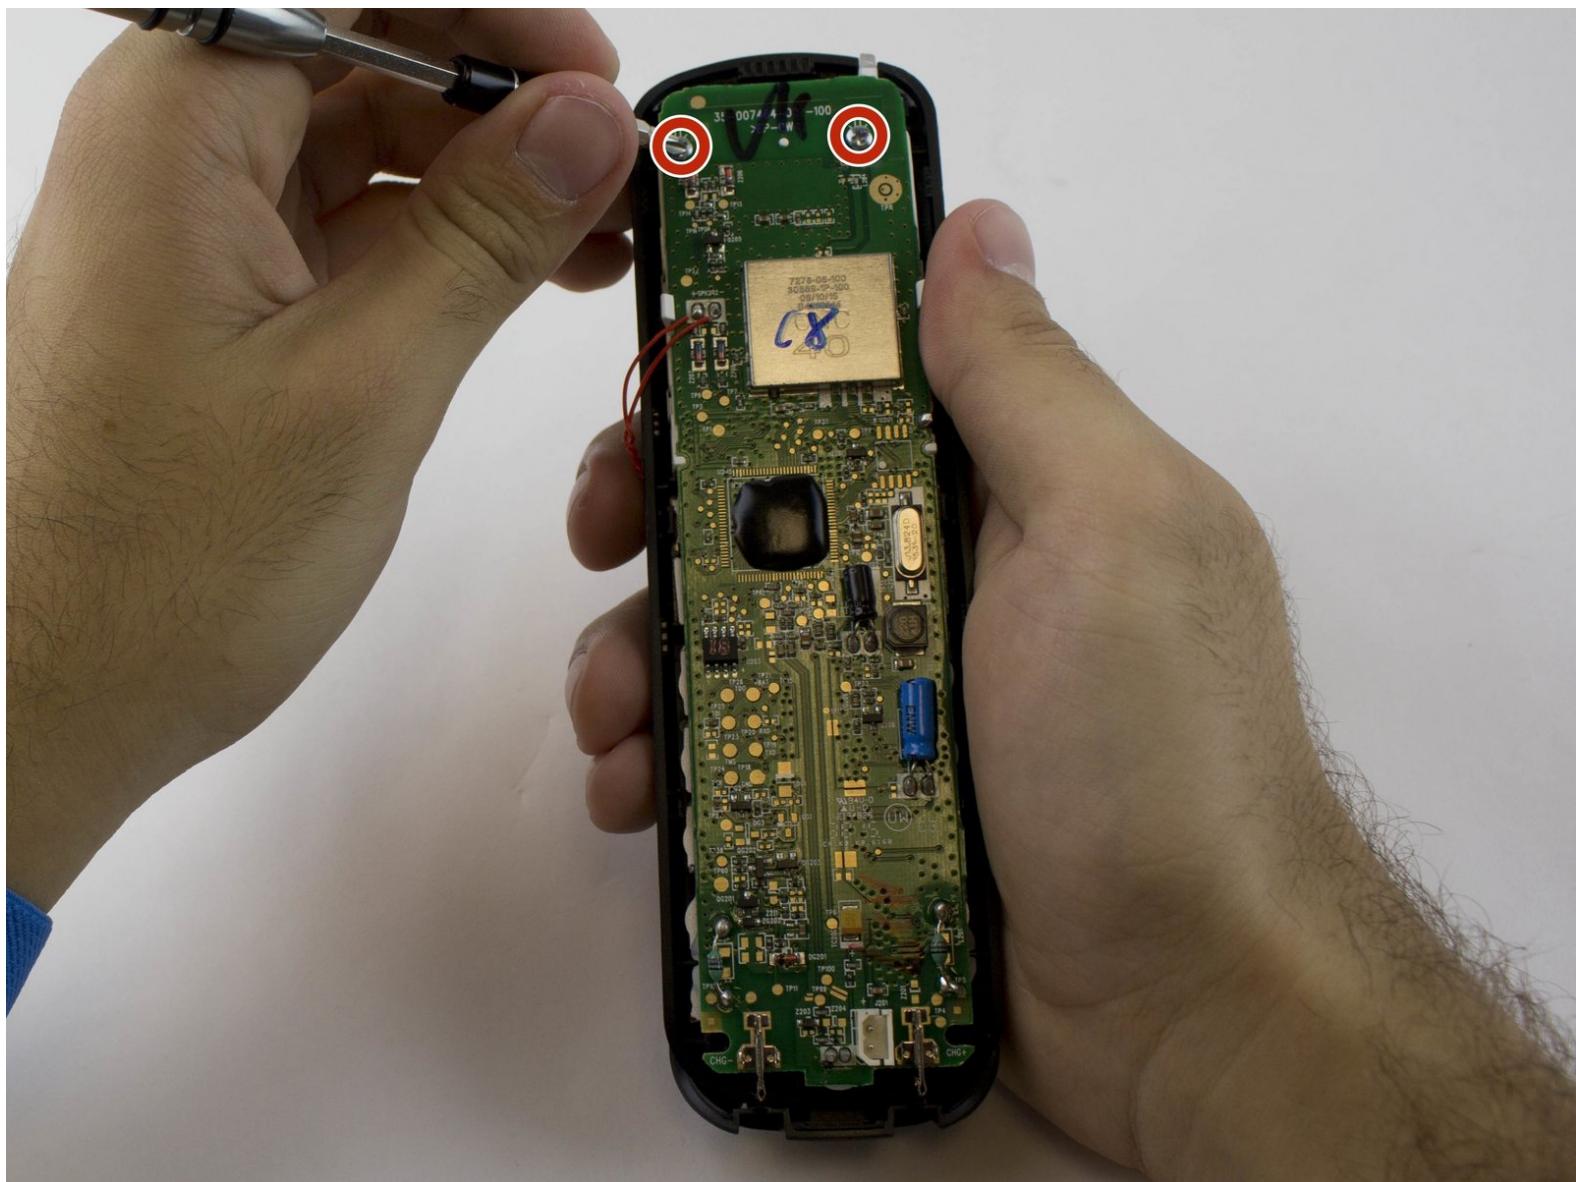

## INTRODUCTION

If your handset is encountering difficulties, replacing the motherboard may resolve it. Use the anti-static wrist strap as a precautionary measure to prevent damage to the motherboard.

### **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [Anti-Static Wrist Strap](#) (1)
- [Phillips #1 Screwdriver](#) (1)

## Step 1 — Battery



- Find the bump where the battery cover meets the phone. Put your thumb here, and push and slide the cover down.

## Step 2




- Unplug the battery by squeezing your hands on the small white plug and lifting it up.

**⚠** Do not pull on the wire itself because you might damage the wire!

- The battery is now detached and ready to be removed by lifting it out.

## Step 3 — Motherboard

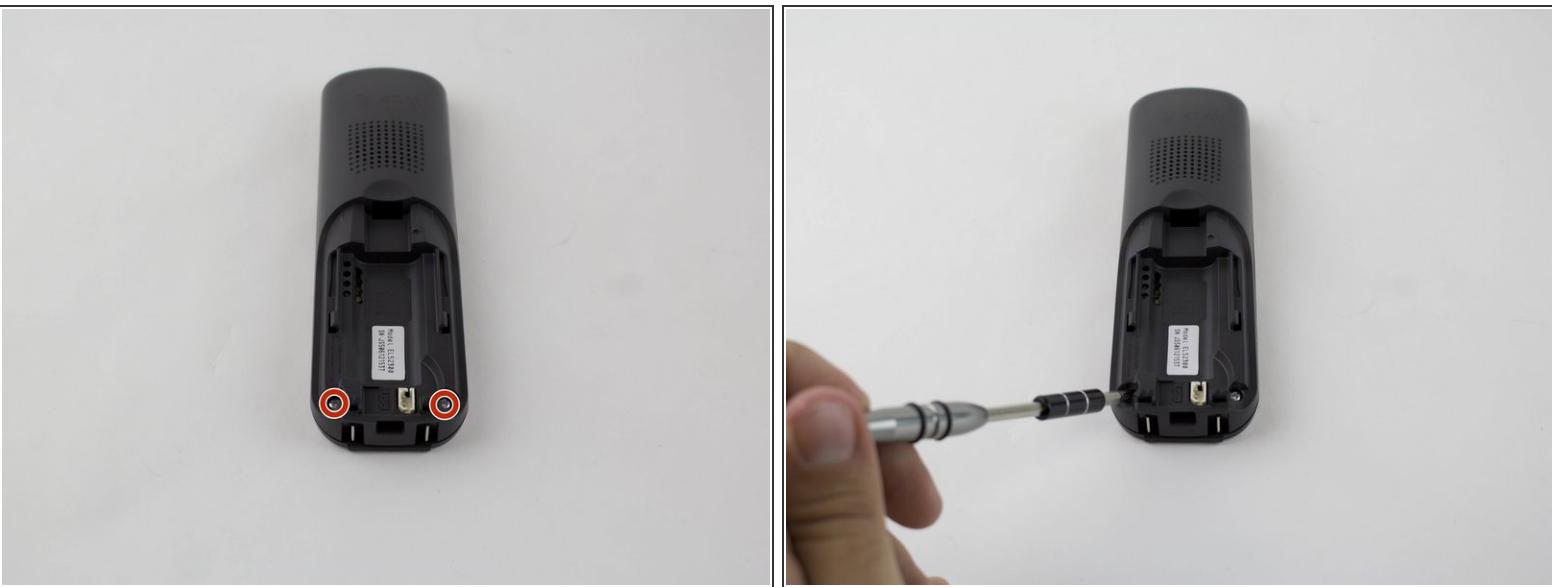

- Remove the two 3.75 mm screws with a PH1 screwdriver.

## Step 4



- Use a plastic opening tool to remove the handset case.

**⚠** Be careful to not lift the case too far as the ringer cable is attached to the case.

## Step 5



- Remove the two 3.65 mm screws on the motherboard with a PH1 screwdriver.

 Use an anti-static wrist strap to prevent damage to the motherboard.

To reassemble your device, follow these instructions in reverse order.