



ATT Trimline 210M Back Cover Disassembly

Prerequisite for other guides.

Written By: Juan Carrillo




INTRODUCTION

The back cover is easily removed by inserting a Metal Spudger on the bottom of the phone. Be careful not to use too much force when attempting to open up the phone.

TOOLS:

- Metal Spudger (1)

Step 1 — ATT Trimline 210M Back Cover Disassembly

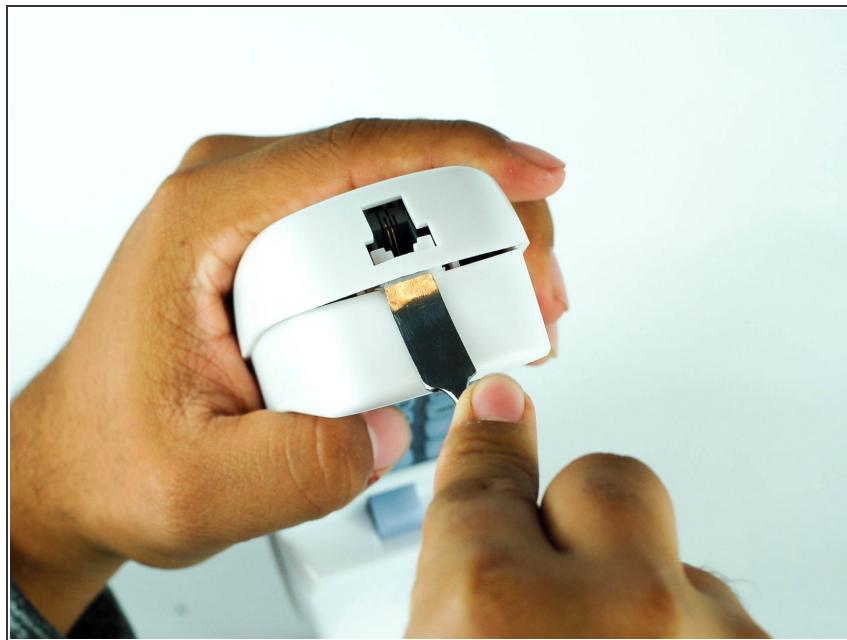

- Open up the phone with a metal spudger, sticking it in the bottom near the cord jack entry.

 Be careful with the amount of force you use, or the plastic may crack.

Step 2



- Pull up on the spudger while simultaneously pulling up the top shell of the phone.

Step 3



- After unclipping the bottom half of the shell, pull upward from the position shown in the picture to detach the top half of the shell.

 The cord connecting the speaker is short, and may detach if not done carefully.

Step 4



- You will have the motherboard and speaker exposed to you.

To reassemble your device, follow these instructions in reverse order.