



# Acer Aspire 4741G-332G32Mn Backplate Replacement

Before you remove the backplate, you must remove the battery and pry out the keyboard first.

Written By: Christopher Carstairs



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Battery



- Flip the lock latch to unlock battery.

## Step 2




- Slide the middle latch and remove the battery.

## Step 3 — Backplate



- Pry off the keyboard using the opening tool.
- Take out the 2 screws that is connected to the motherboard using the Phillips #0 screwdriver.

## Step 4

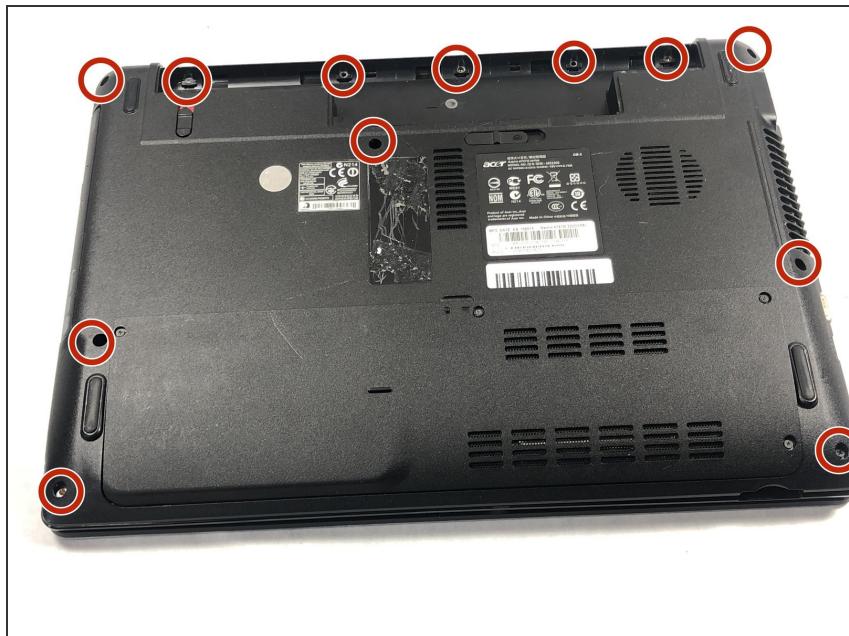

- Remove all 12 screws from backplate using the Phillips #0 screwdriver.

## Step 5



- Using the prying tool to remove the bottom of the laptop.

To reassemble your device, follow these instructions in reverse order.