




# Acer Aspire 4741G-332G32Mn Motherboard Replacement

Use this guide to replace motherboard in an Acer Aspire 4741G-332G32Mn.

Written By: Christopher Carstairs

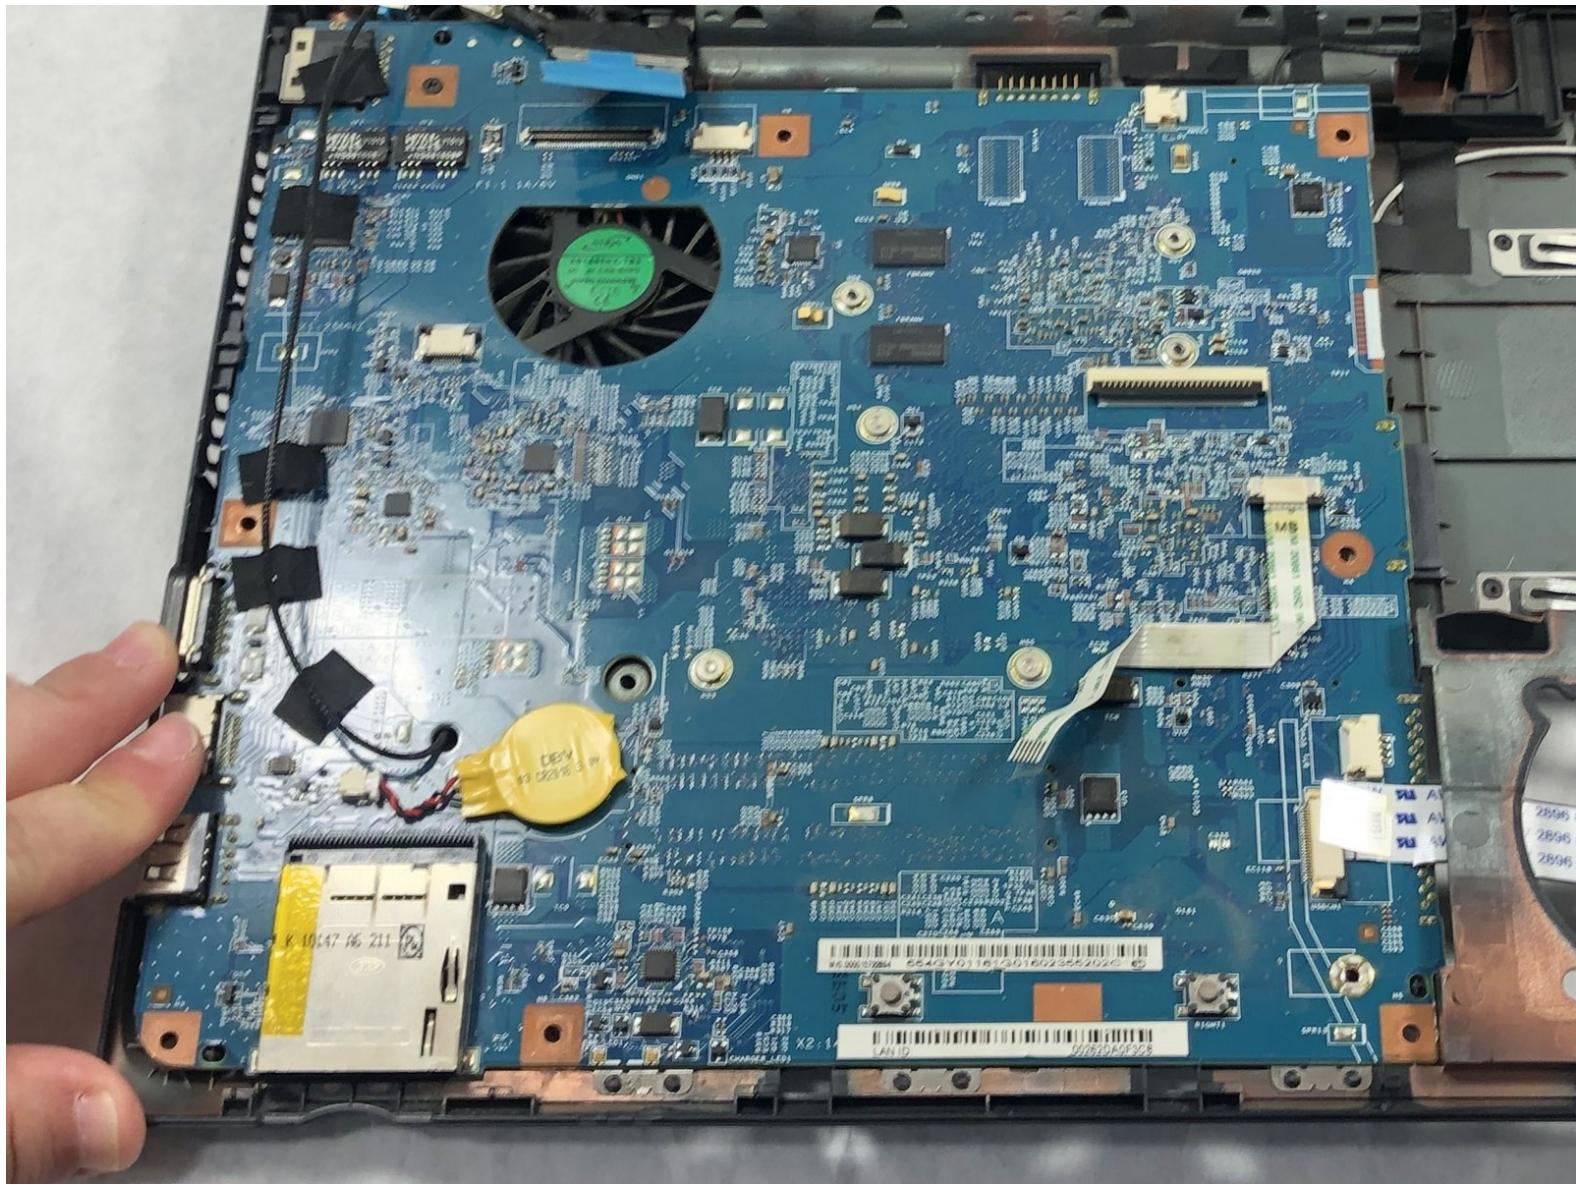

 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Battery



- Flip the lock latch to unlock battery.

## Step 2




- Slide the middle latch and remove the battery.

## Step 3 — Backplate



- Pry off the keyboard using the opening tool.
- Take out the 2 screws that is connected to the motherboard using the Phillips #0 screwdriver.

## Step 4

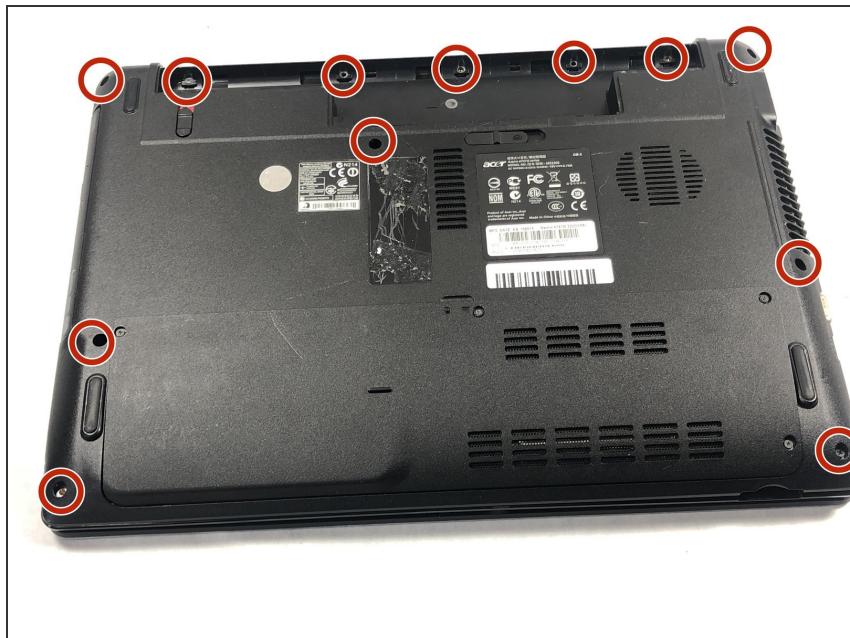



- Remove all 12 screws from backplate using the Phillips #0 screwdriver.

## Step 5




- Using the prying tool to remove the bottom of the laptop.

## Step 6 — Fan

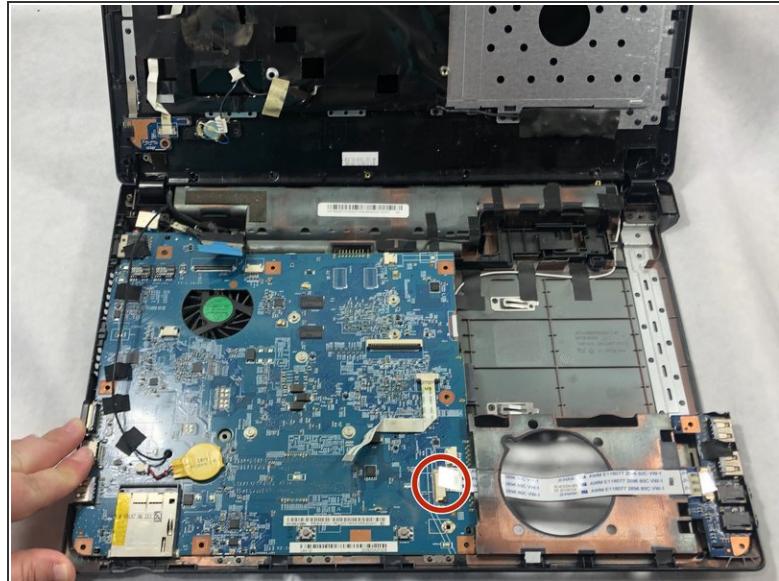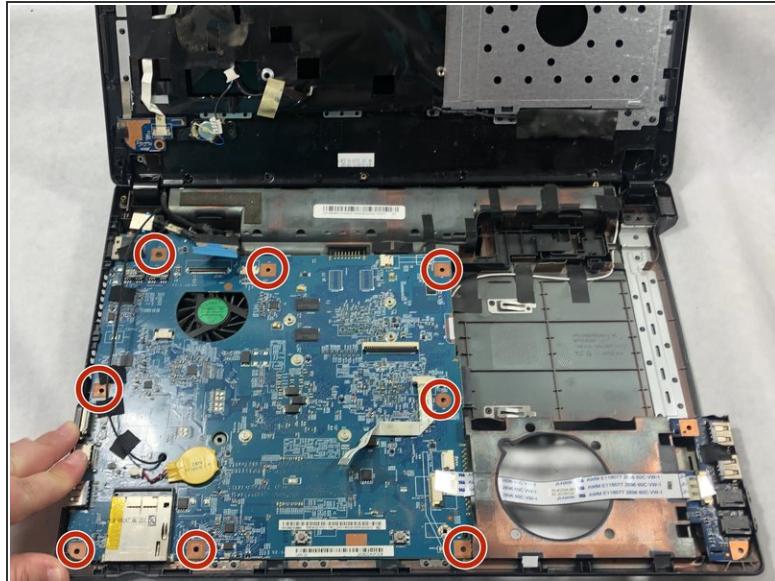


- Using a Phillips #0 screwdriver, remove the eight screws that hold the motherboard to the frame of the laptop.
- Disconnect the USB port from the motherboard.

## Step 7

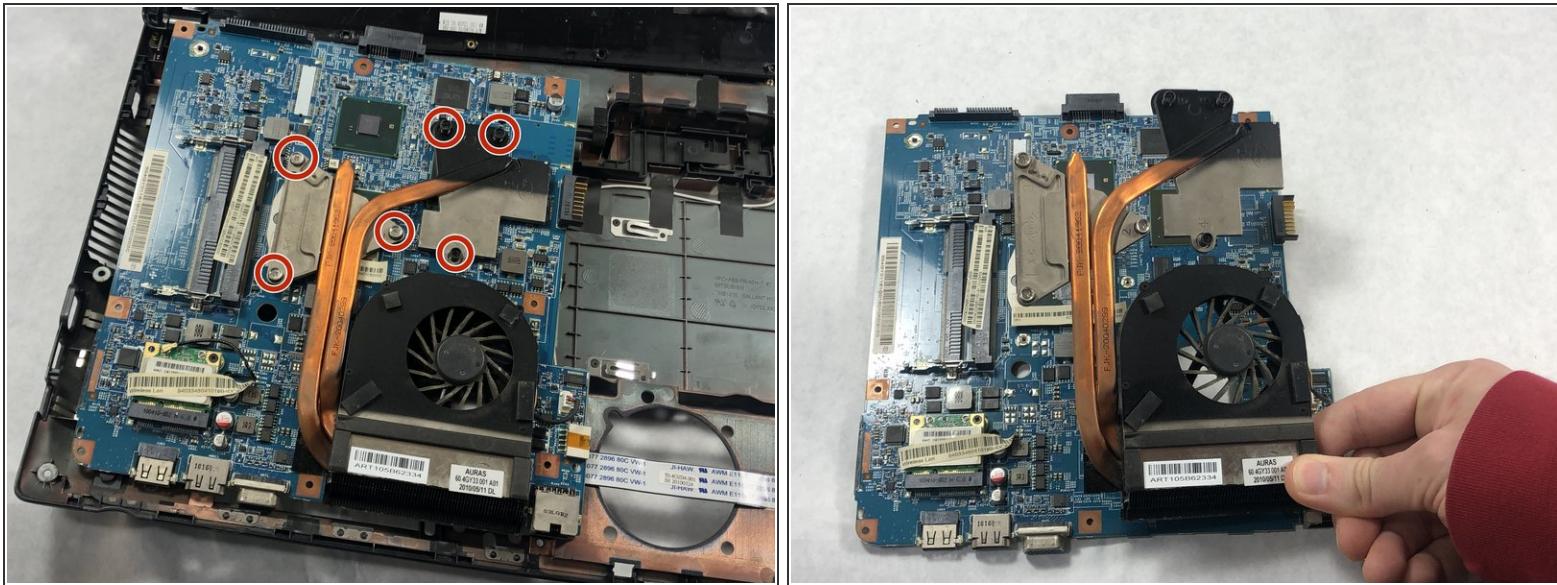

- Unscrew the 6 screws that hold the fan to the motherboard using the same screwdriver.

## Step 8 — Motherboard

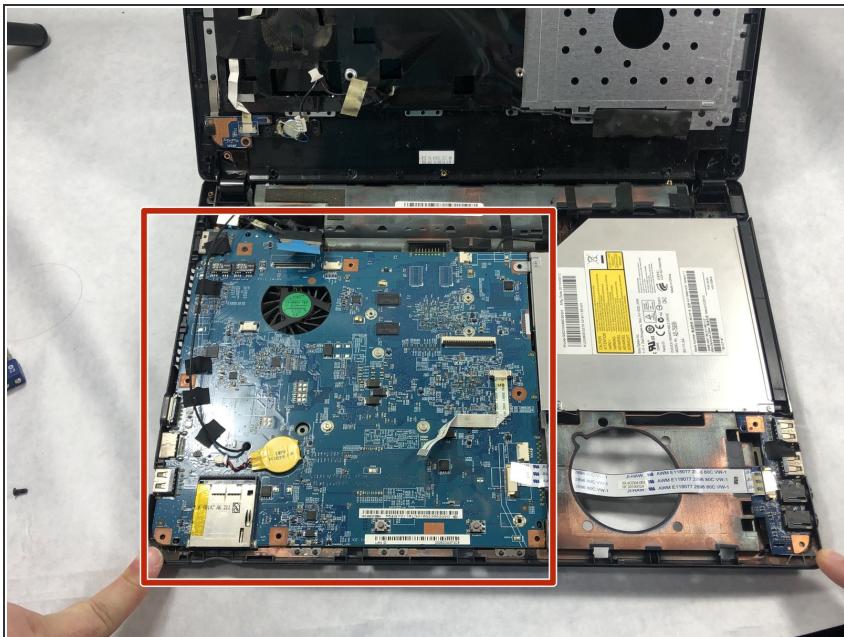

- Remove the motherboard from the device.

To reassemble your device, follow these instructions in reverse order.