



Acer Aspire 4741G-332G32Mn Screen Replacement

This guide will help take apart the screen in your Acer Aspire 4741G-332G32Mn.

Written By: kristen



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Screen




- Take blue opening tool, and push it between the edge of the computer and the screen, and go all the way around, popping apart the screen.

Step 2




- Pop the two circle screw caps off and take out the two screws using a Phillips #0 screwdriver.

Step 3

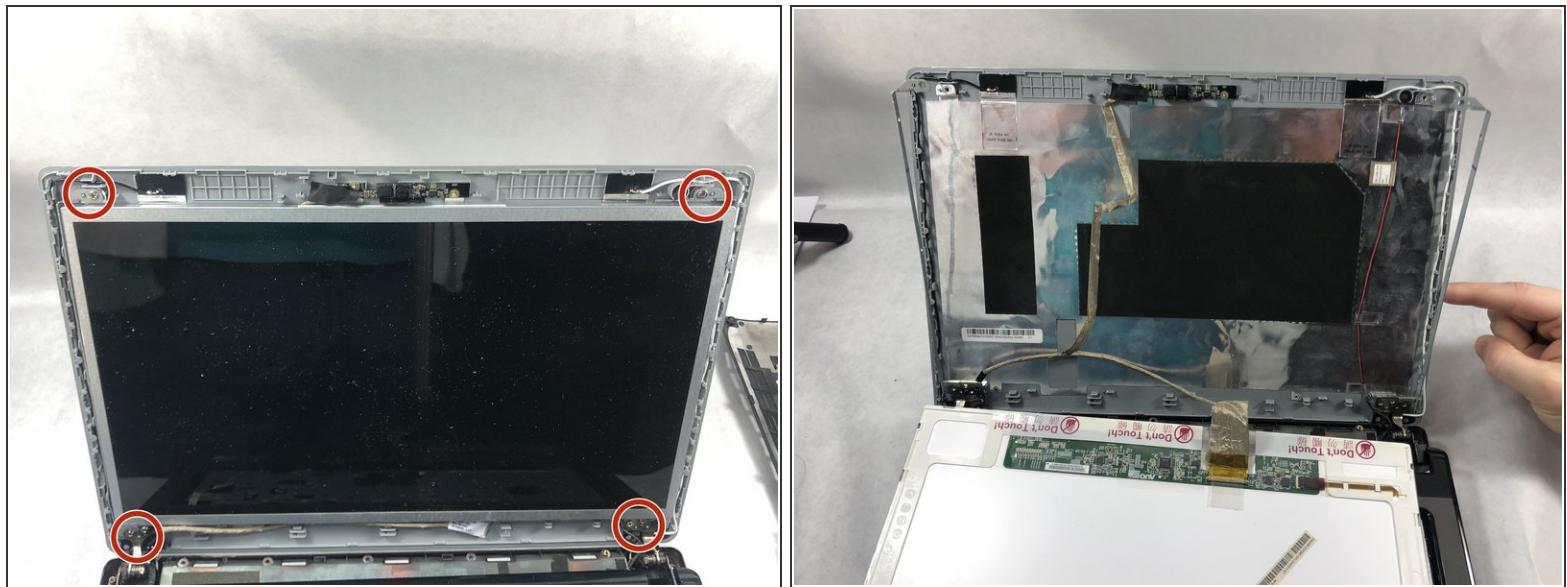

- Take the six screws out at the bottom of the monitor and the two at the top of the screen using the same screwdriver.

Step 4

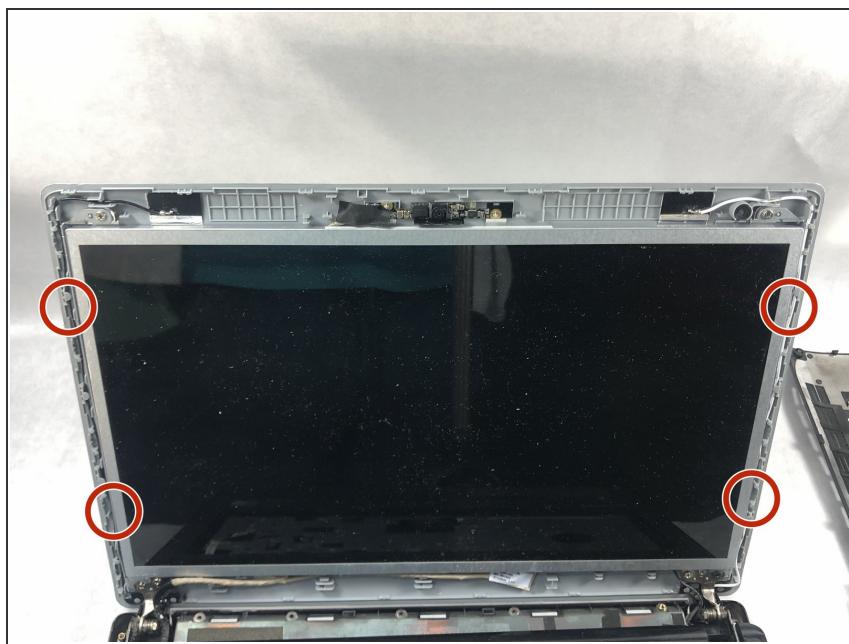

- Take all the screws out along the side of the screen (two on each side) using the same screwdriver.
- Lastly, remove the screen adapter from the screen. The screen should become loose and free to remove.

To reassemble your device, follow these instructions in reverse order.

