



Acer Aspire 5334-2581 Screen Replacement

This guide will provide you with an overview of how to replace the screen on your Acer Aspire 5334-2581.

Written By: gilson teixeira



INTRODUCTION

This repair guide will provide you with a step-by-step process on how to replace the LCD on your Acer aspire 5334-2581 device.

TOOLS:

- Metal Spudger (1)

Step 1 — Battery



- Please make sure your device is unplugged . Turn it over slowly, and place it on a flat surface.


Step 2



- This latch holds your battery in place, it should always be locked. Make sure to unlock this piece.

⚠ Do not break this latch, otherwise your battery will not hold in place.

Step 3

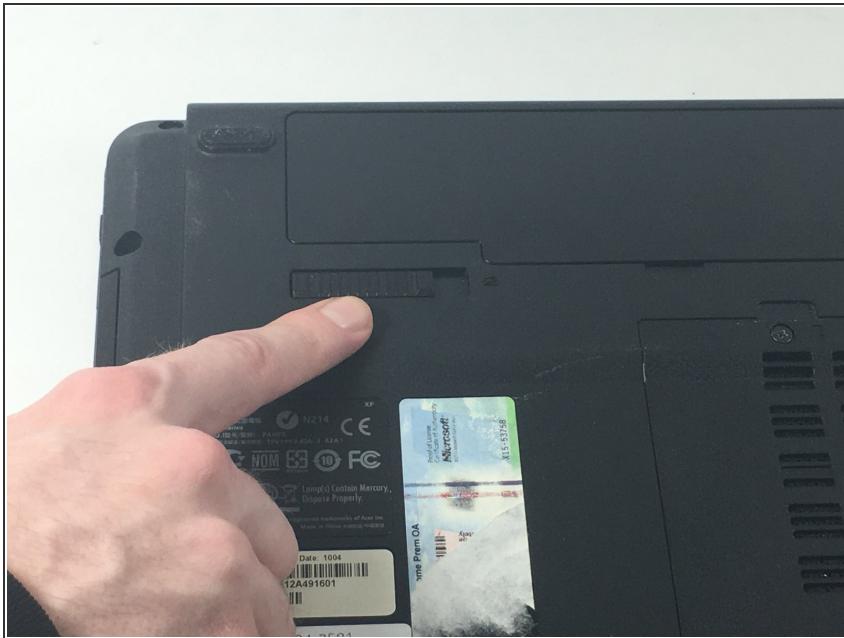

- Locate the eject latch and push it so the battery can come out.
- The battery will lift up once you have pushed the latch.

You DO NOT need to adjust the latch when replacing the new battery, because it just snaps in place.

Step 4




- Lift the battery up, and it should just come right off. You should see the label with the part number.

Step 5 — Screen



- Remove the 4 rubber supports from the screen. Then remove the screws underneath.


Step 6

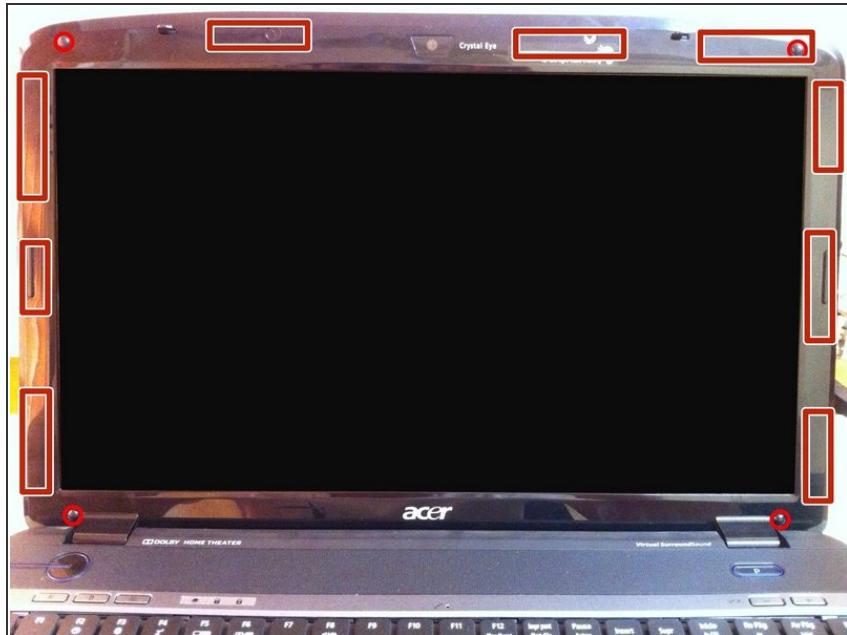

- With a spudger, release the clips that hold the plastic frame to the back cover.

Be careful while handling the bottom, there are cable connections, and you don't want to damage them

Step 7

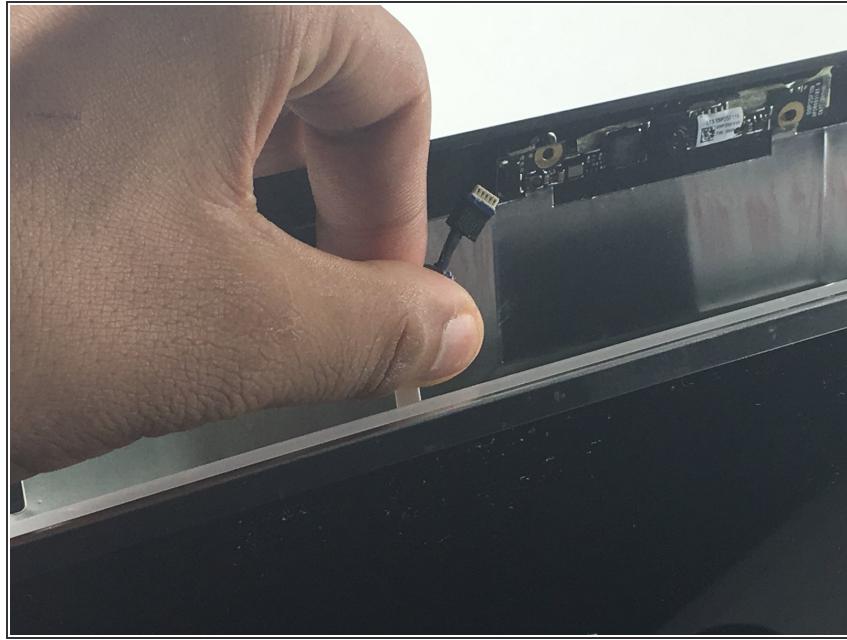


- With caution disconnect the camera cable.

Step 8



- Remove the 4 screws in the side of the LCD. Screen should be able to come of the frame

Step 9


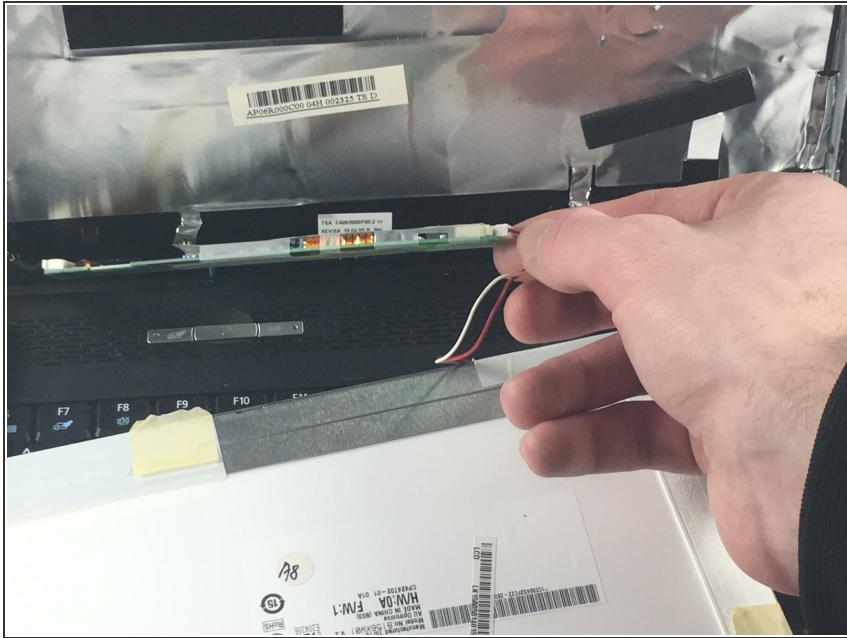


- Take the screen and flip on top of the keyboard.

- Unplug the cable connected to the video card.

⚠ Don't use too much force, you don't want to damage this component.

Step 10

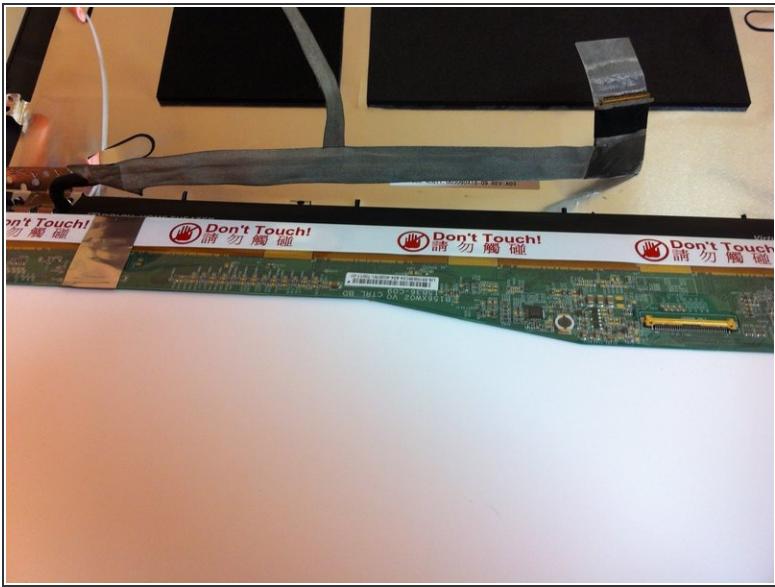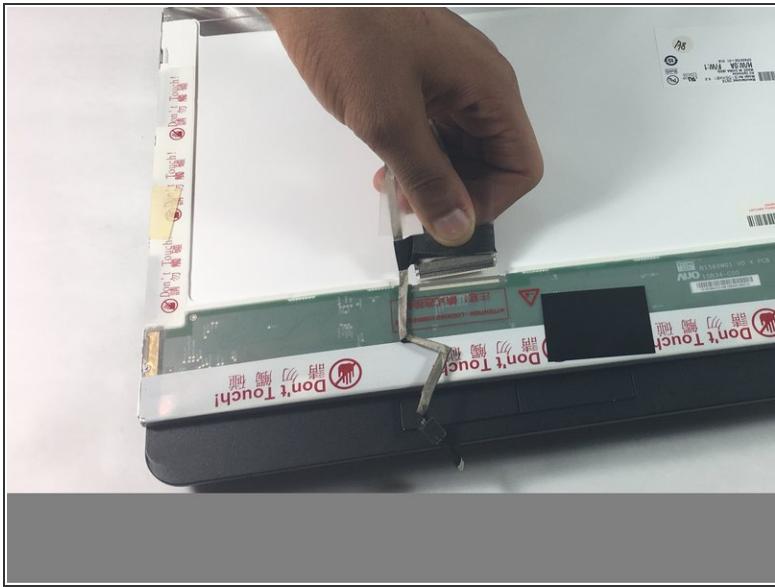

- Remove the tape, and unplug the display cable.
- Unstick the cable from the back of the LCD, and now the LCD is free to come off. You are ready to install a new one

⚠ Try not to damage this cable, otherwise replacing it would be so much pain.

This document was generated on 2019-09-25 09:46:01 PM (MST).

To reassemble your device, follow these instructions in reverse order.