



# Acer Aspire 5349-2592 Back Plate Replacement

This guide will accomplish taking the back plate off to get inside of your Acer Aspire 5349-2592.

Written By: Abderahmane Naidjate



## INTRODUCTION

Is the back panel on your Acer Aspire 5349-2592 damaged, or do you need to troubleshoot, repair, or replace components underneath the panel? If so, follow this guide with simple steps and minimal tools to remove, or replace the back panel.

Please make sure to follow the prerequisite procedures.

## TOOLS:


- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Battery




- Turn the laptop over so that the back is facing you.

## Step 2

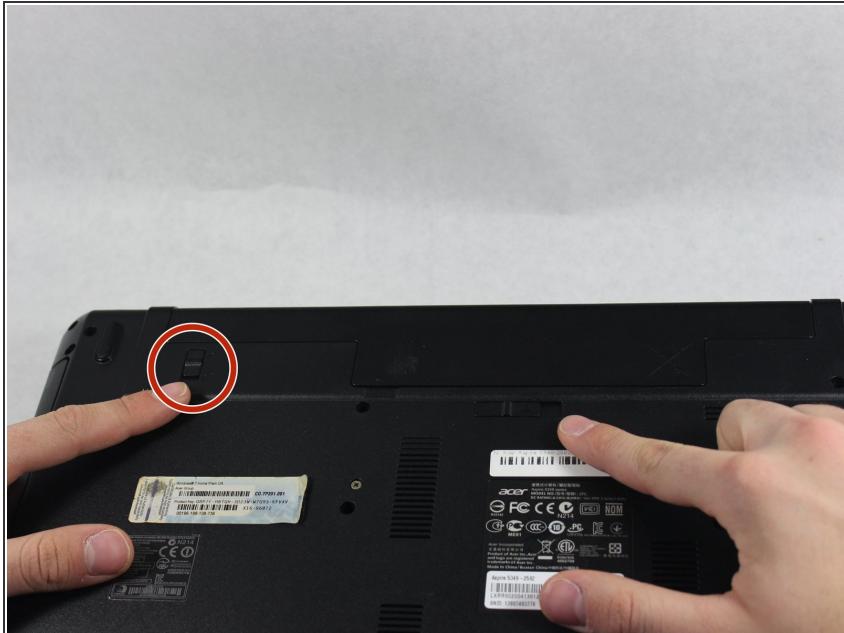


- Push the laptop battery release lock.

## Step 3

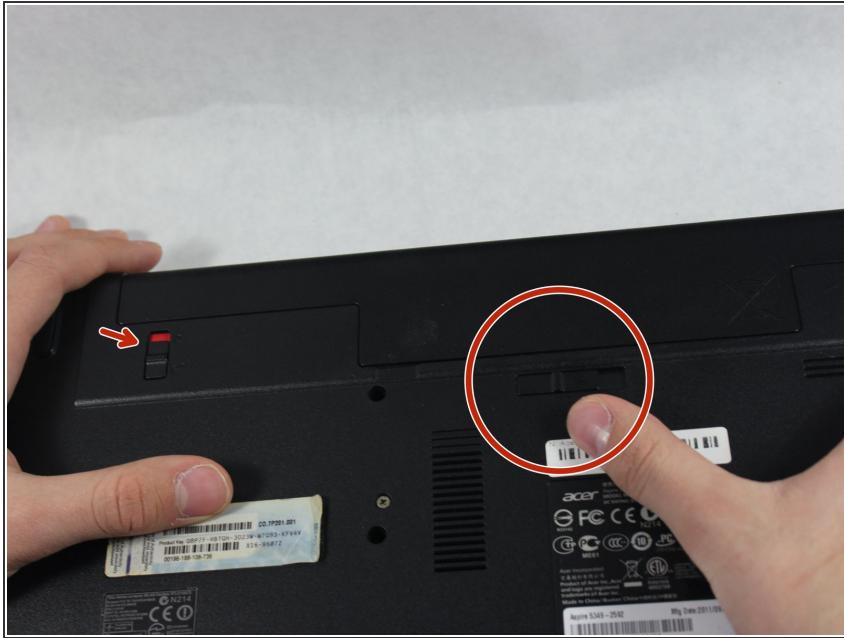

- Now that the Acer-Aspire 5349-2592 laptop battery is unlocked, press the battery release button down.

## Step 4

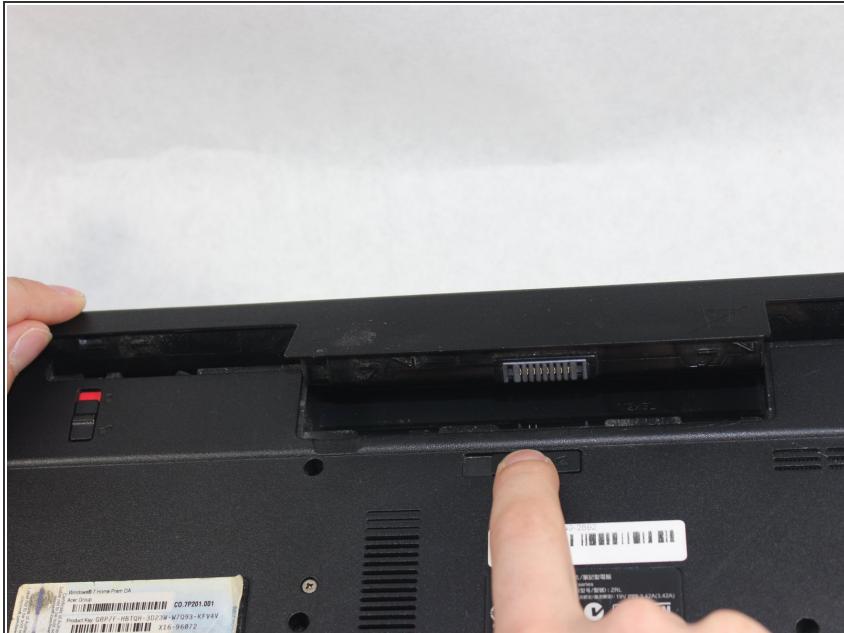

- Holding down the laptop battery release button, gently pull the battery away from the laptop.

## Step 5 — Back plate



- Remove all of the screws located on the back of the laptop using your Phillips #0 screwdriver.

## Step 6



- Pry open the backplate using the iFixit opening tool and remove the backplate from the device.

To reassemble your device, follow these instructions in reverse order.