




Acer Aspire One Cloudbook AO1-132-C3T3 Motherboard Replacement

This guide will explain how to completely remove the motherboard.

Written By: Hanna Flores

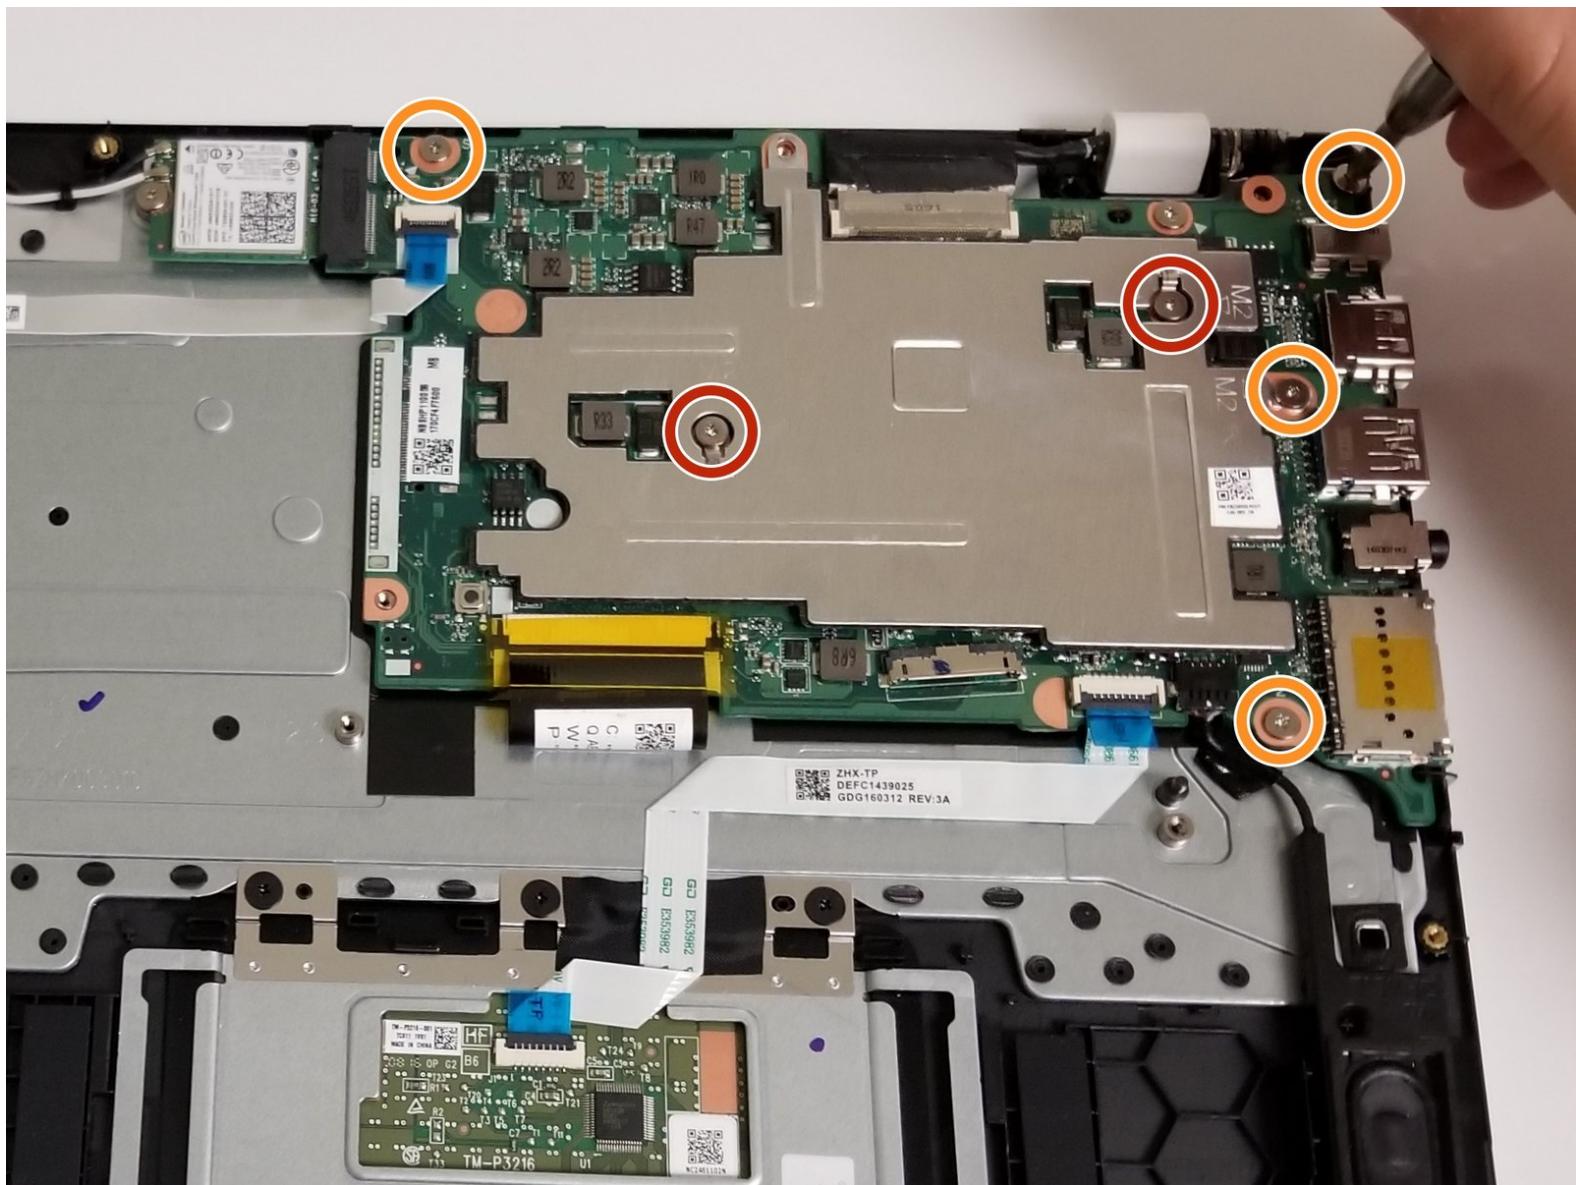

INTRODUCTION

This guide will explain how to completely remove the motherboard.

TOOLS:


- [Phillips Head Screwdriver: Size PH1 \(1\)](#)

Step 1 — Battery




- Remove eleven 4 mm Phillips #1 screws.
- Pull the backplate off using your fingers.

Step 2

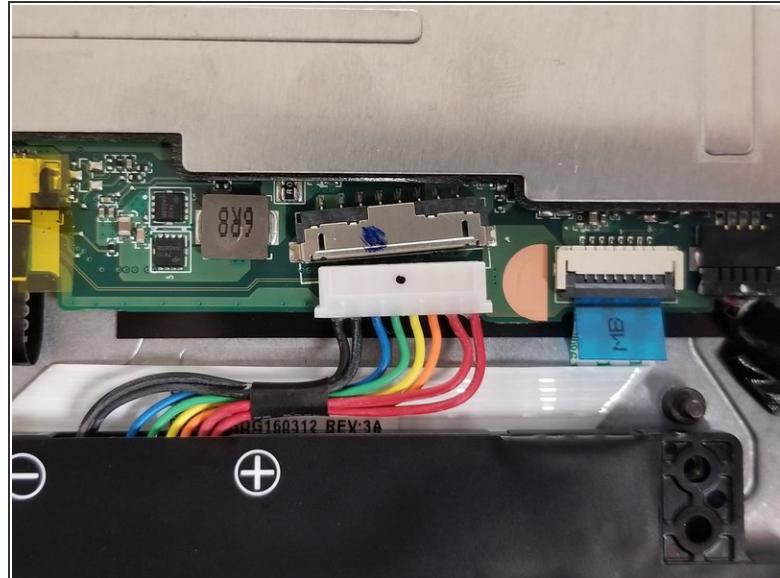



- Pull the rainbow cord out of the motherboard using the tabs on the sides.

Step 3

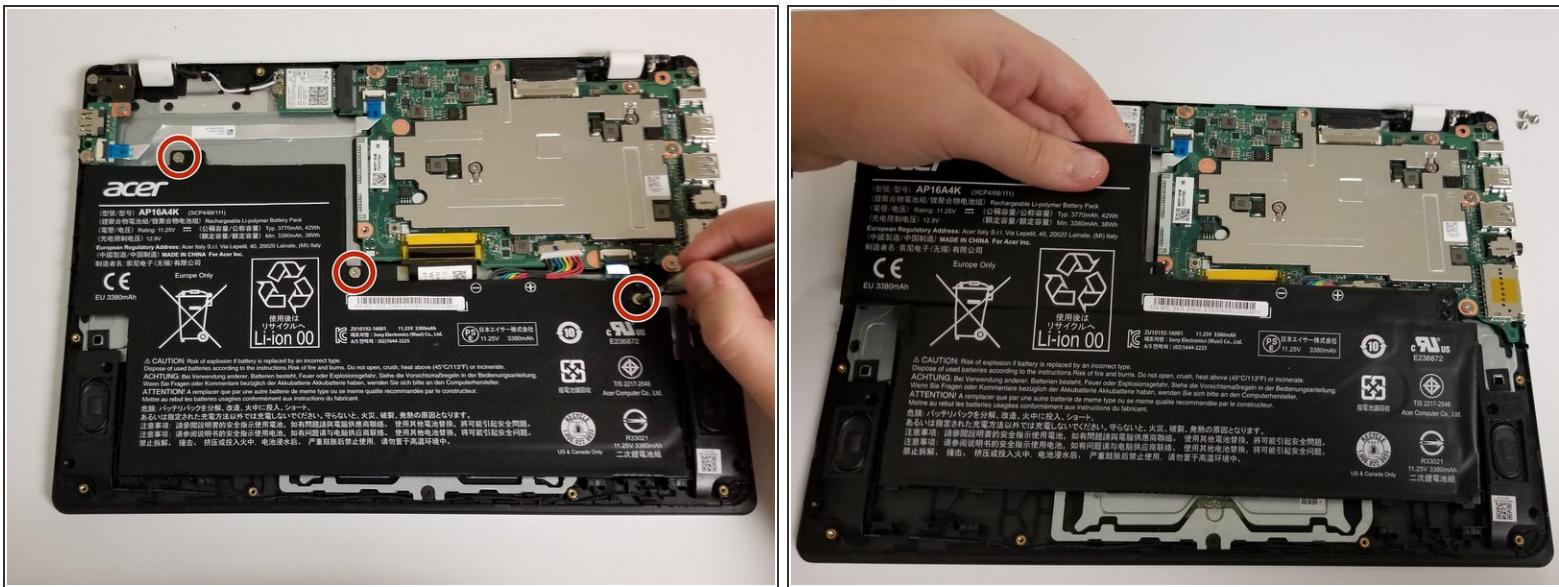


- Remove three 4 mm Phillips #1 screws holding down the battery.
- Lift the top edge of the battery and pull back towards the hinges to remove the battery.

Step 4 — Motherboard

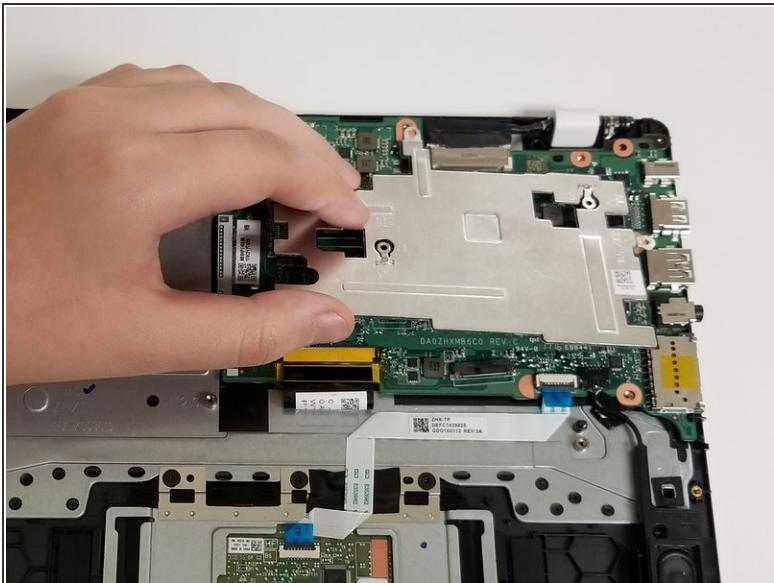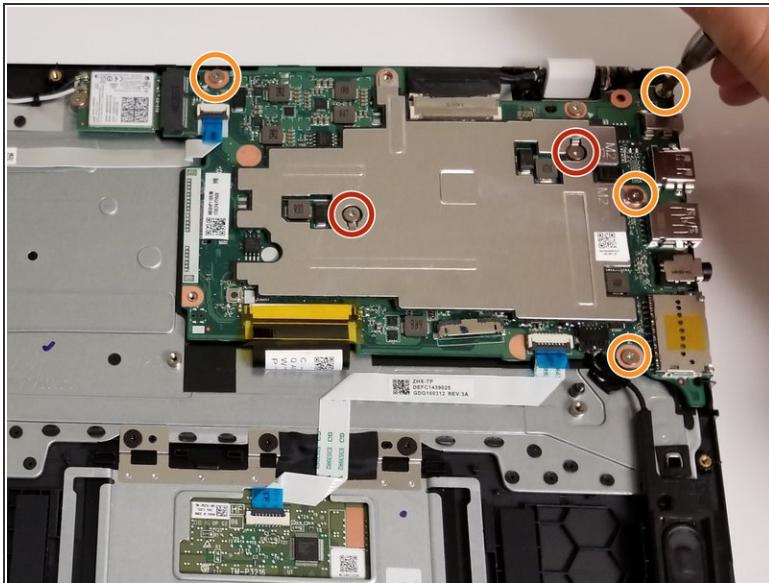


- Remove two 4 mm Phillips #1 screws holding down the metal plate Using a philips head size 1 screwdriver.
- Remove the plate using your fingers.
- Remove four 5mm Phillips #1 screws holding the motherboard in place.

Step 5

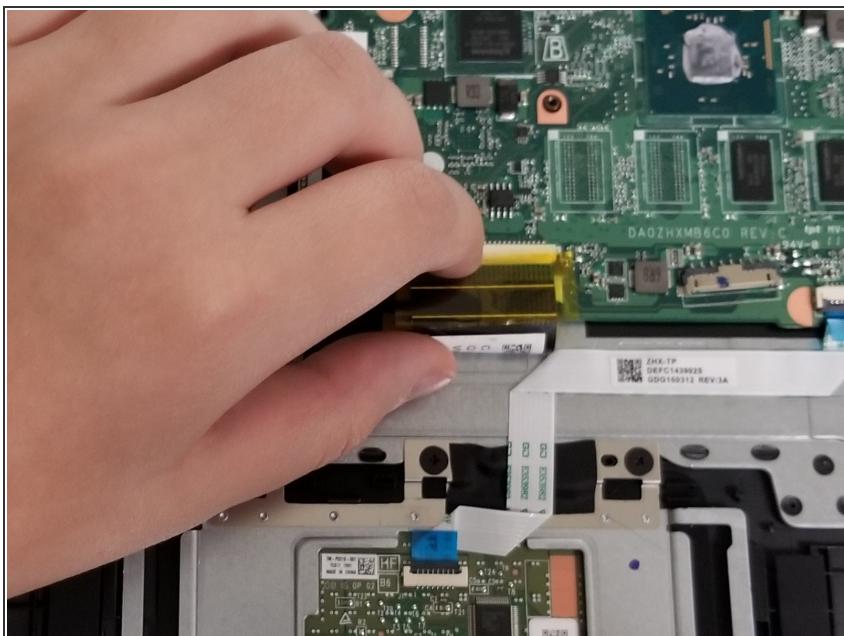


- Pull the yellow cord out from the motherboard using the sticker.

Step 6

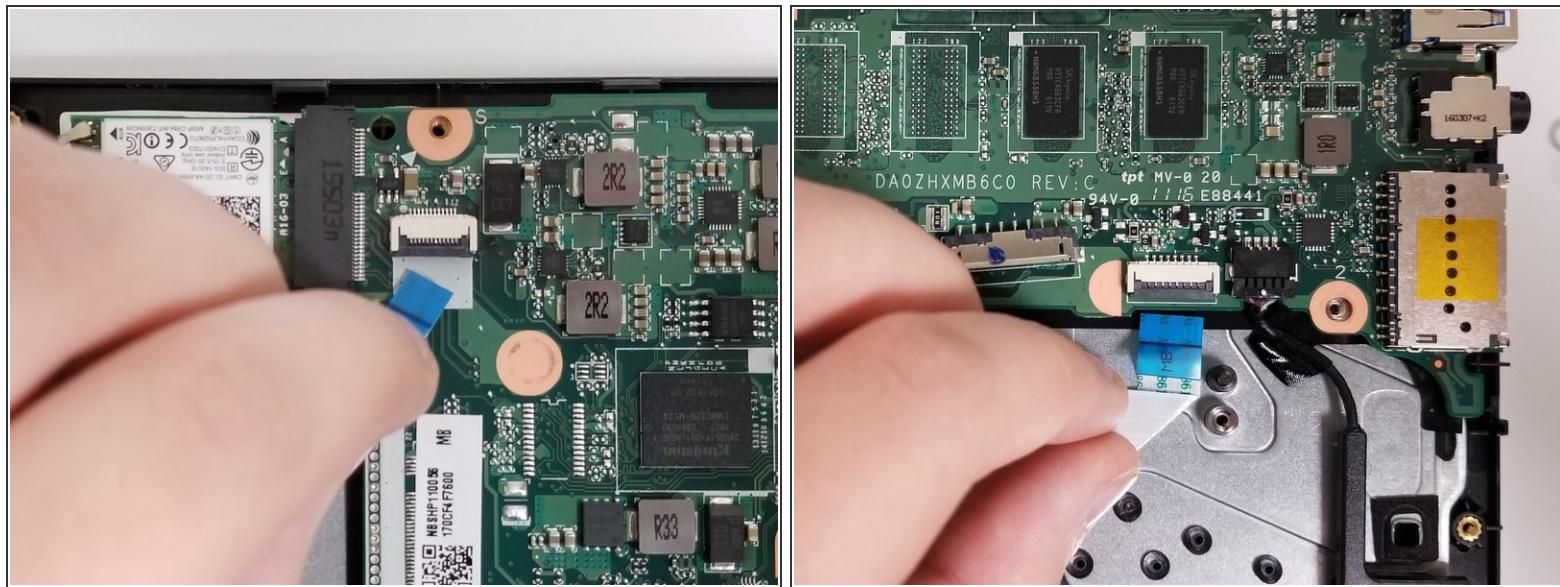

- Pull both small blue ribbon cords out of the motherboard using the stickers.

Step 7

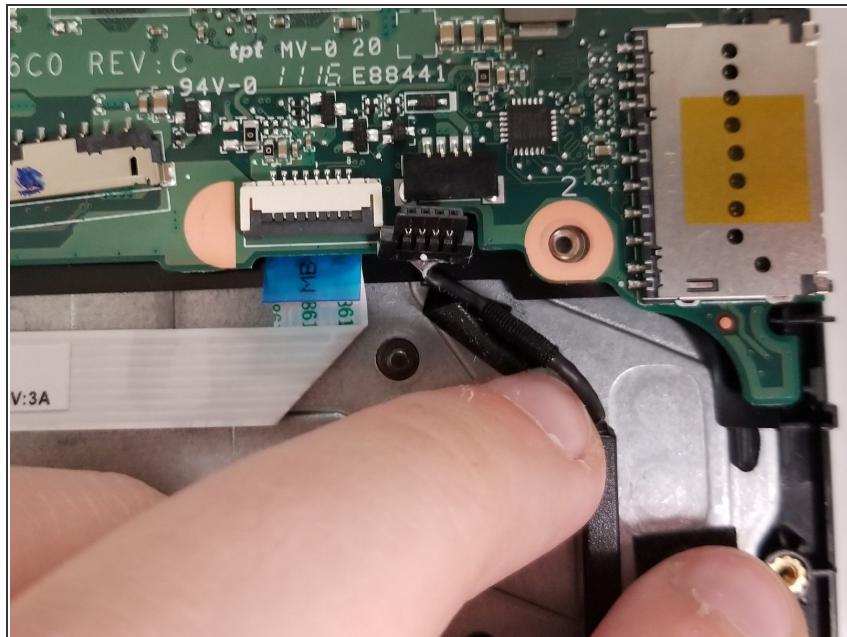

- Gently pull the black cord out from the motherboard.

Step 8



- Pull the top cord out of the motherboard using the sticker.

Step 9



- Gently pull the motherboard away from the small square chip to its left.

To reassemble your device, follow these instructions in reverse order.