



Acer Aspire V5-122P-0468 Network Card Replacement

Replace your network card if your wireless connection is inconsistent or unresponsive.

Written By: Nat McCormick




INTRODUCTION

If your wireless connection is inconsistent or unresponsive the network card may be faulty. Use this guide to replace the network card and get back online.

TOOLS:

- Anti-Static Wrist Strap (1)
- Phillips #0 Screwdriver (1)
- Spudger (1)

Step 1 — Battery

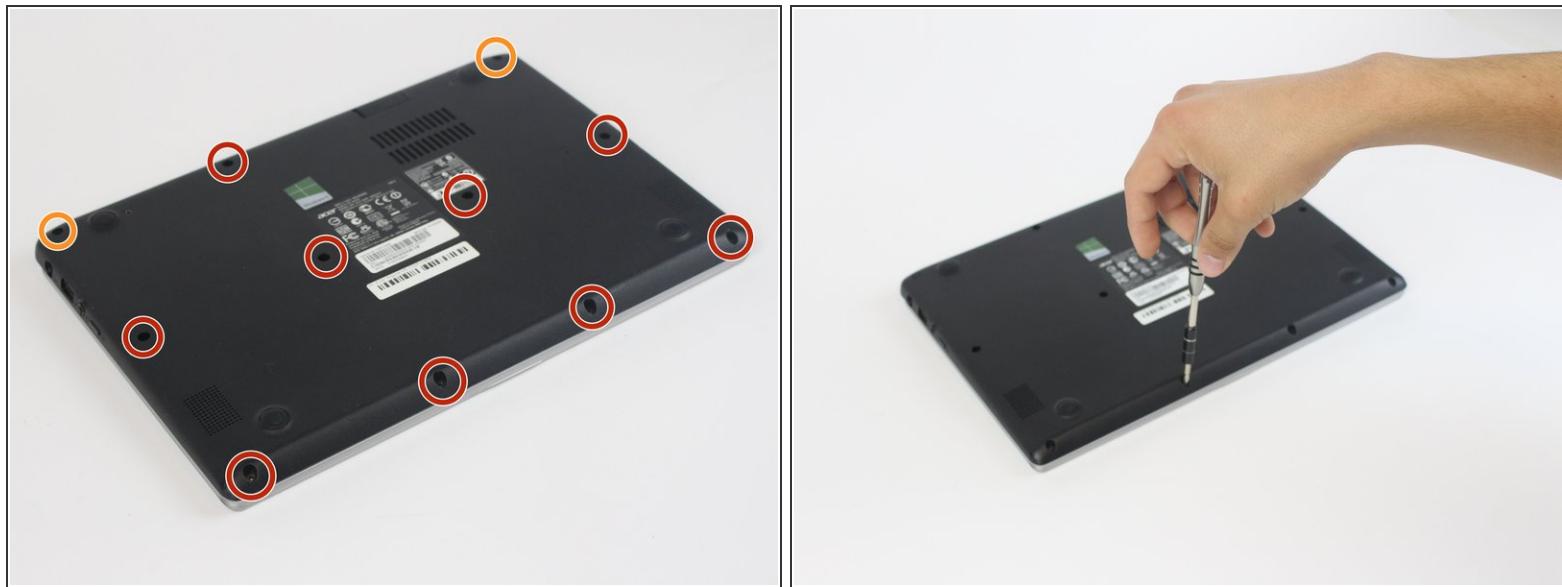

- Remove the nine 4mm screws with a PH0 screwdriver.
- Remove the two 6mm screws with a PH0 screwdriver.

Step 2



- Remove the black rubber tab on the back of the computer
- Remove the 4mm screw hidden underneath the black tab with a PH0 screwdriver.

Step 3



- Orient the computer upside down, with the hinges facing away from you.
- Find the black plastic piece in the SD card slot on the right side of the computer.
- Remove the plastic piece by sliding it out of the SD card slot.


Step 4



- Insert a spudger at these eight locations to disengage the plastic tabs from the housing cover, and pry apart.
- Continue around the entire perimeter of the cover with the spudger.

(i) Use a spudger to pry the cover around I/O ports.

Step 5

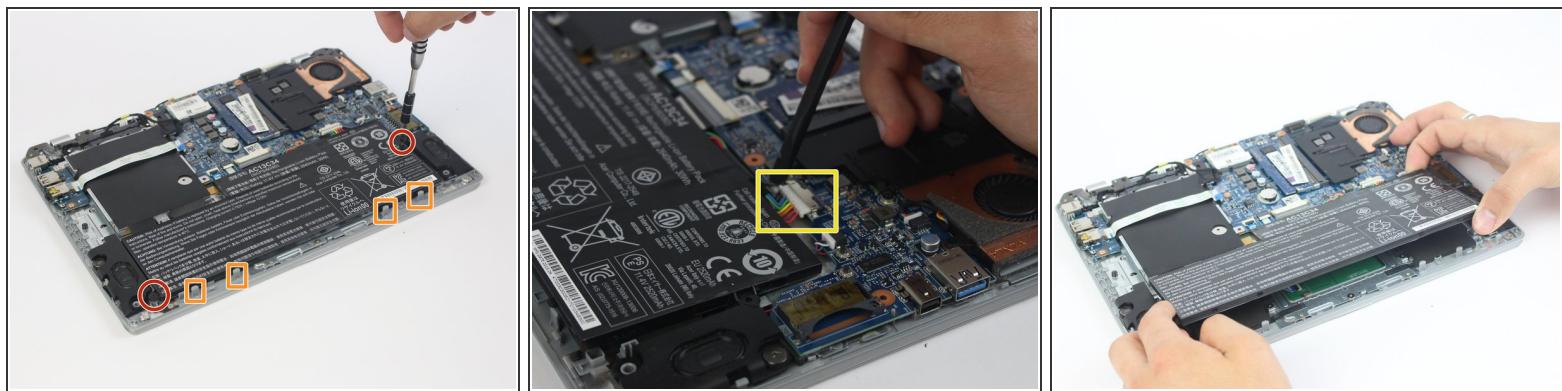


- Remove the two 4mm screws using a PH0 screwdriver.
- Depress the tabs holding the battery with a spudger.
- Disconnect the battery connector from the motherboard using a spudger.
- Pull the battery up and away from the laptop to remove.

Step 6 — Network Card



- Remove the wire connector from the network card using a plastic opening tool.

Step 7

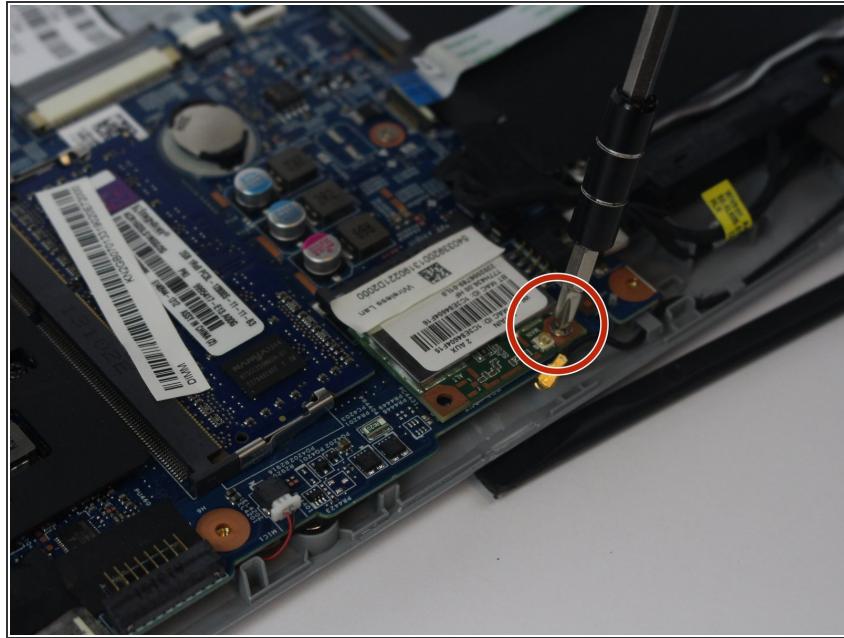

- Remove the 3mm Phillips #0 screw.

Step 8



- Gently slide the network card out of the motherboard connector.

To reassemble your device, follow these instructions in reverse order.