



Acer S200HL LCD Monitor Bundled Cable Connector Replacement

This bundled cable connector replacement guide will show the necessary steps in opening up the monitor's back panel, removing the faulty bundled cable connector, and placing a new bundled cable connector.

Written By: Jeffrey Kong



INTRODUCTION

The bundled cable connector is the electronic link between the motherboard and the monitor screen.

TOOLS:

- [Phillips #2 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [5mm Hex Screwdriver \(1\)](#)

PARTS:

- [Bundled cable connector \(1\)](#)

Step 1 — Removing the Stand



- Place the monitor screen face down.
- Firmly hold the base of the stand with one hand and the bottom of the monitor with the other hand.
- Pull the stand away from the monitor.

Step 2 — Removing the Back Panel



- Use the plastic opening tool to pry the back panel from the front panel.
- Start at one point of the crease and pry along the entire monitor for the best results.

Step 3



- Gently lift the back panel away from the monitor.


Step 4 — Removing Interior Motherboard Casing



! Be sure to keep track of where you place your screws. A magnetic mat is great for keeping your screws in one spot.

- Unscrew the four 7.5 mm Phillips #2 screws connecting the motherboard to the metal casing.

Step 5

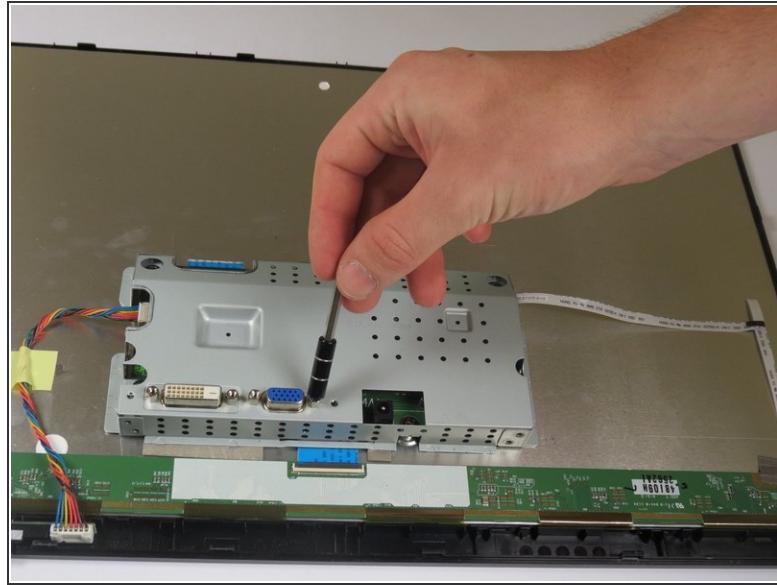


- Remove the four 10 mm hex screws.

Step 6




- Gently lift the motherboard casing from the monitor.

Step 7 — Removing the Bundled Cable Connections

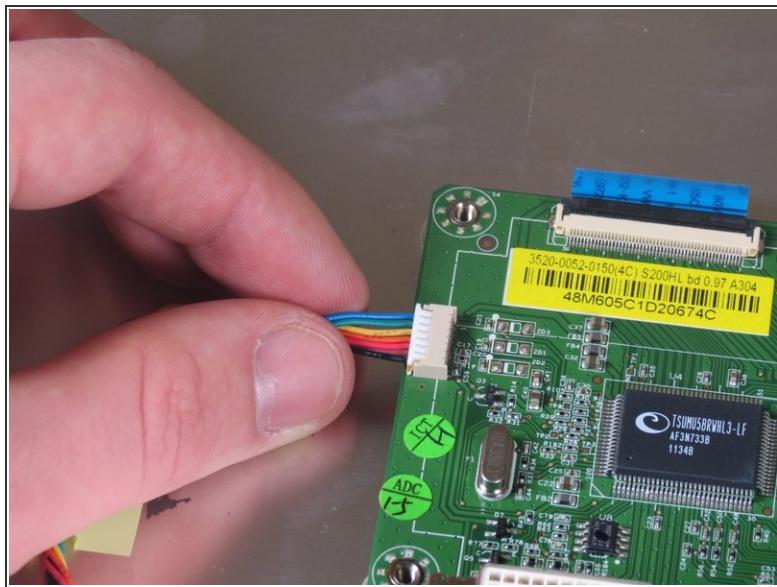

- Pull the bundled cable connector gently away from motherboard.

Step 8

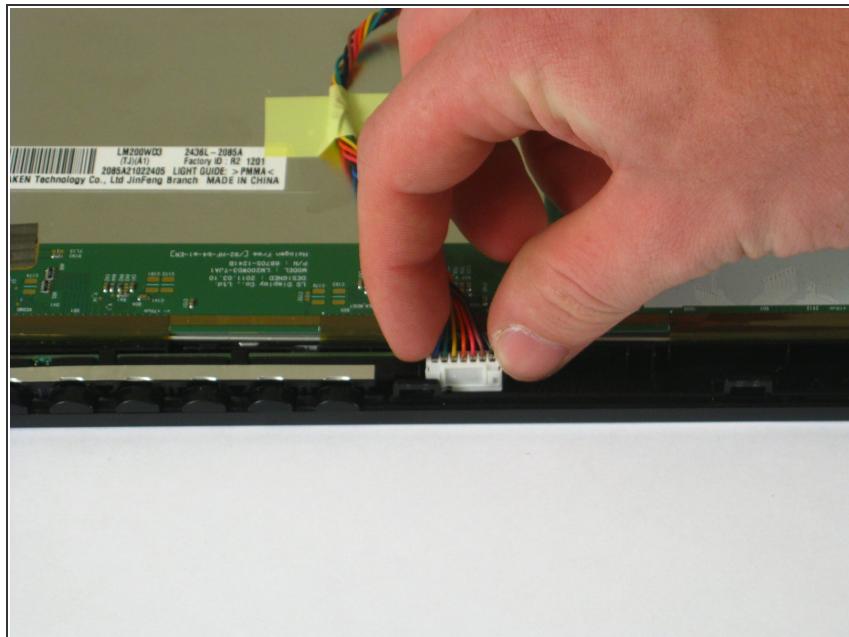

- Grasp the other side of the bundled cable connector and gently pull the connector away from the screen.

To reassemble your device, follow these instructions in reverse order.