



Acer Swift 1 SF114-32 Screen Replacement

Acer Swift 1 (SF114) Screen Replacement (no screws)

Written By: CSE



INTRODUCTION

When you remove the bezel beware of the silver part just above the keyboard. You must flatten the laptop before you can remove the bezel including the silver part at the bottom (no screws).

There are no screws to remove the screen. It is stick with tape that is quite hard to remove, so use a heat gun or hairdryer to make it come loose a bit easier.

Step 1 — Remove bezel



- Use something like a credit card or an opening pick and start at the top.


⚠ Beware of the bottom part!

Step 2 — Tape is used instead of screws



- Left and right tape at the back needs removing.

Step 3 — Softening and removing the tape

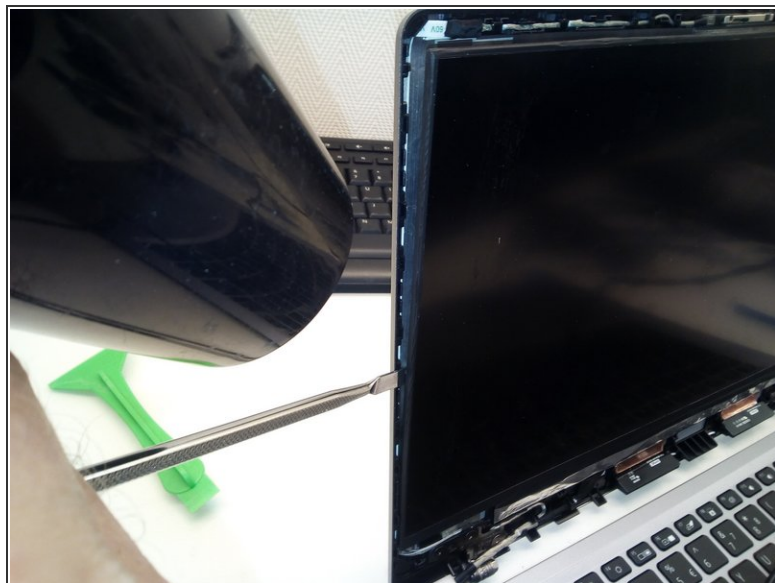

- Use a hairdryer to soften and remove the tape.

Step 4



- Remove the LCD.

Step 5 — Unplug the 30 pin connector



- Unplug the 30 pin connector before completely removing the screen.

To re-assemble your device, follow these steps in reverse order.