



# Alcatel Jitterbug Smart Camera Replacement

A guide to remove and replace rear camera to Jitterbug Smart.

Written By: Gavin Le



## INTRODUCTION

Use this guide to replace the logic board in your Alcatel Jitterbug Smart

### TOOLS:

- [JIS #000 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Metal Spudger](#) (1)

## Step 1 — Rear Camera




- Pry back cover open with a metal spudger, or your fingernail, in the divot at the bottom left corner of the phone.
- Lift open case by the corner nearest the divot and remove it from the phone.

## Step 2




- Remove the 13 1 mm Phillips screws with JIS #000 Screwdriver.

## Step 3

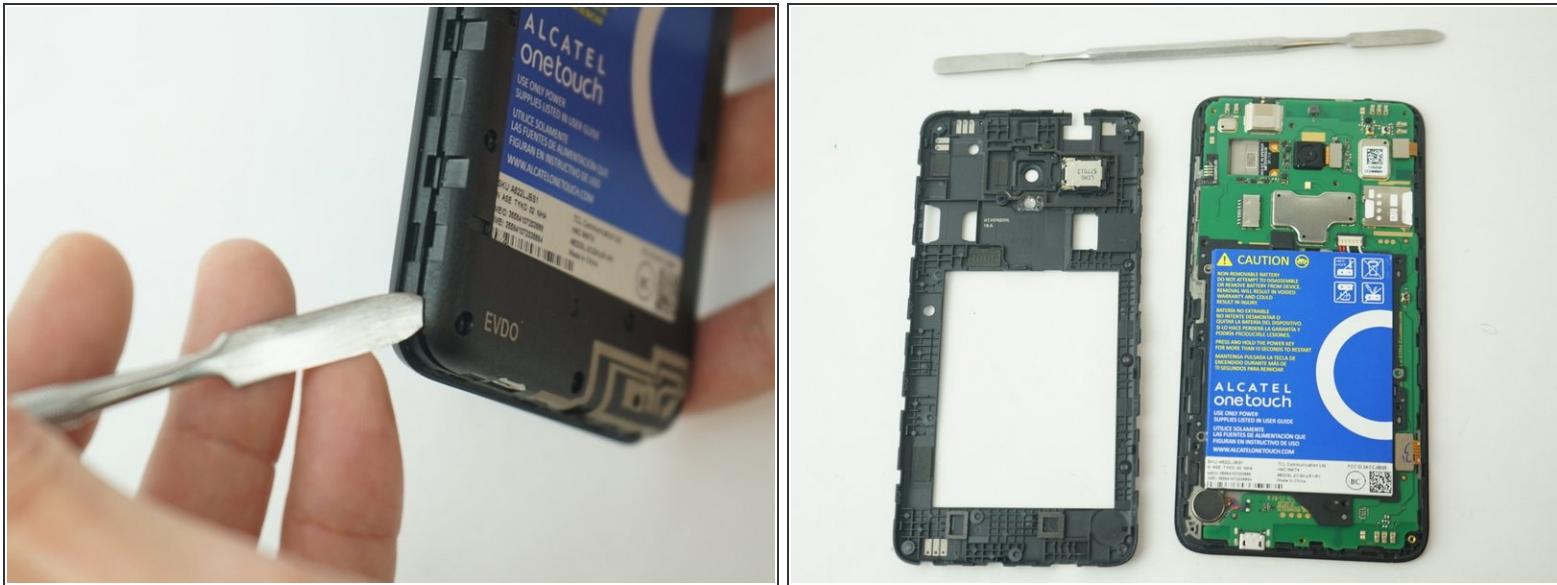

- Gently pry off the Mid frame from the phone using a Metal Spudger.

## Step 4

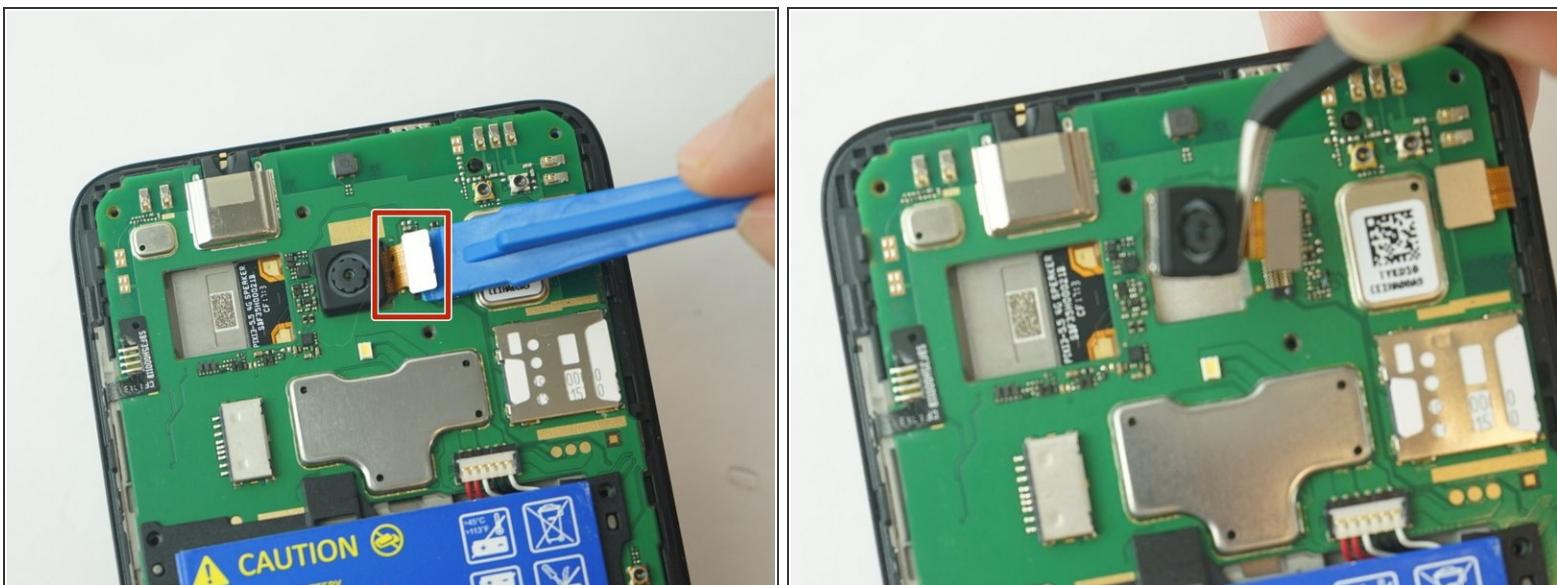

- Use the Plastic Opening tools to gently dislodge the broken camera from the inside of the phone.
- Use a tweezers to pull the camera connector from its port.

**⚠** Be careful not to tear the camera from its connection.

To reassemble your device, follow these instructions in reverse order.