



Alienware M18x CMOS Battery Replacement

This guide explains how to replace the CMOS battery for the Alienware M18X.

Written By: Tiffany Eades




INTRODUCTION

This guide illustrates how to locate and replace the CMOS battery in your Alienware M18x gamer laptop.

TOOLS:

- [T2 Torx Screwdriver \(1\)](#)

Step 1 — Battery

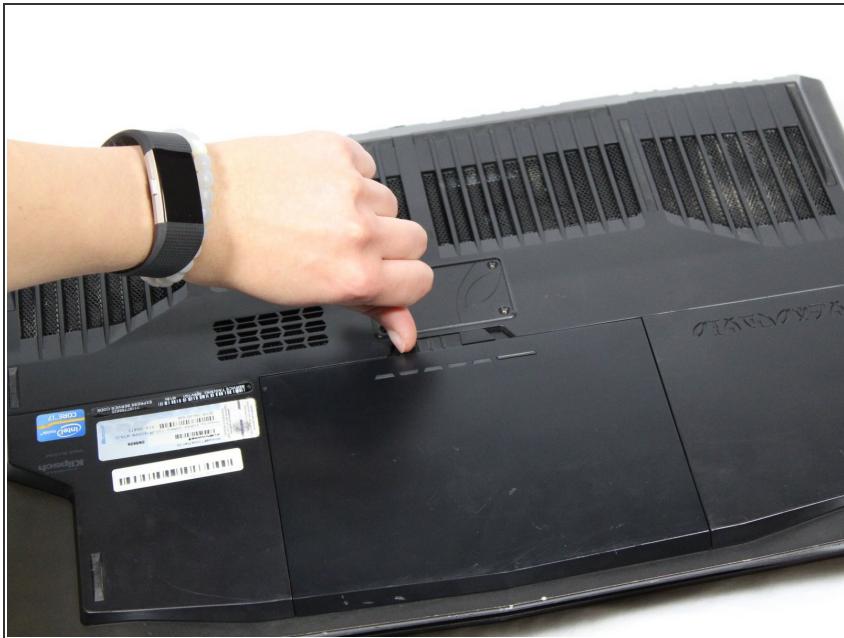


- Flip the laptop over and slide the battery release latch to the right.

Step 2



- Remove battery.

Step 3 — CMOS Battery

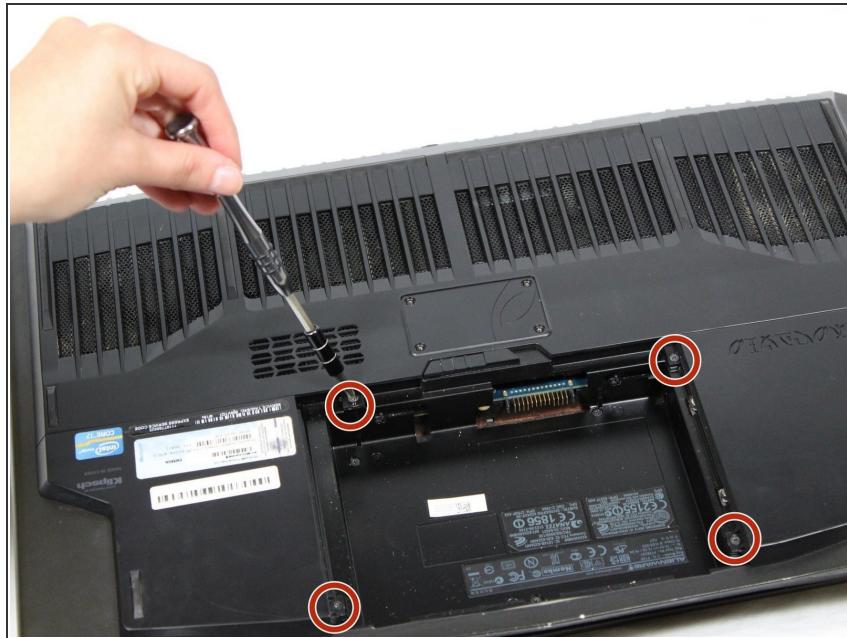

- Use a T2 screwdriver to remove the four 3 mm screws under the battery.

Step 4



- Use a plastic opening tool to remove the bottom cover.

Step 5



- Locate the CMOS battery.

Step 6



- Unplug the battery cable and use a plastic opening tool to remove the CMOS battery.

To reassemble your device, follow these instructions in reverse order.