



# Android tablet Nobis NB09 Screen Replacement

This short guide will show how to replace the screen by disassembling the device and removing the necessary parts to get to the screen.

Written By: Enea Osmann



This document was generated on 2019-09-18 12:44:34 PM (MST).

 **TOOLS:**

- [Spudger \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(2\)](#)
- [T4 Torx Screwdriver \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)


## Step 1 — Screen



- Remove the two 00 Phillips screws located on the right side of the tablet.
- Use the plastic opening tools to loosen and then pry the back of the tablet off.

**⚠** When prying off the back of the tablet, be careful around the tablet's ports. Too much pressure can cause cracks.


## Step 2

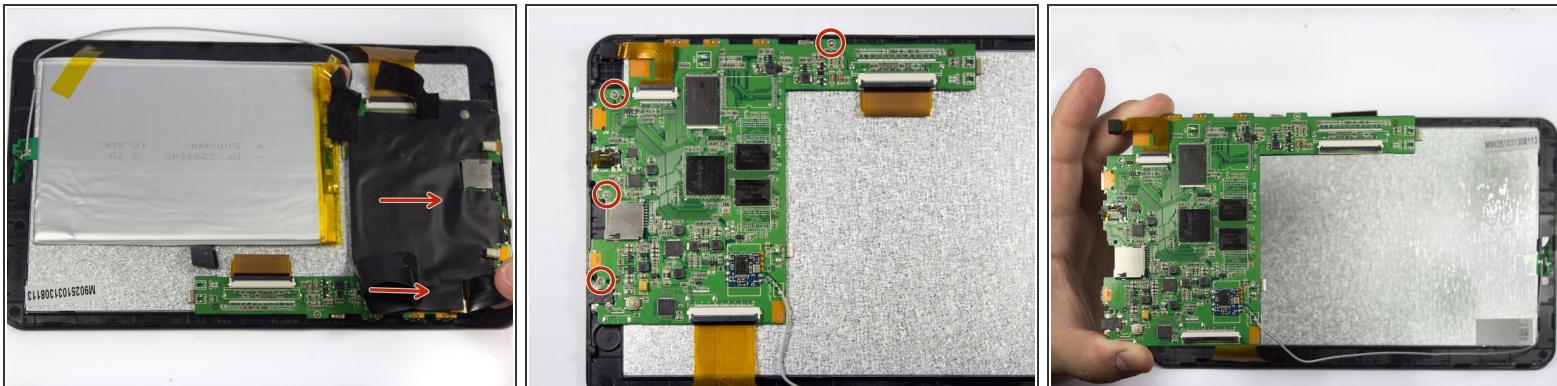

**⚠** It is recommended that a grounding bracelet be used in order to avoid damage to the device's circuits through ESD (Electro-Static Discharge)


- Remove the electrical tape covering the motherboard.
- Remove the four 4.0 mm T4 Torx screws holding the motherboard to the front half of the tablet.
- Remove any remaining adhesive tape on the exposed area.

## Step 3

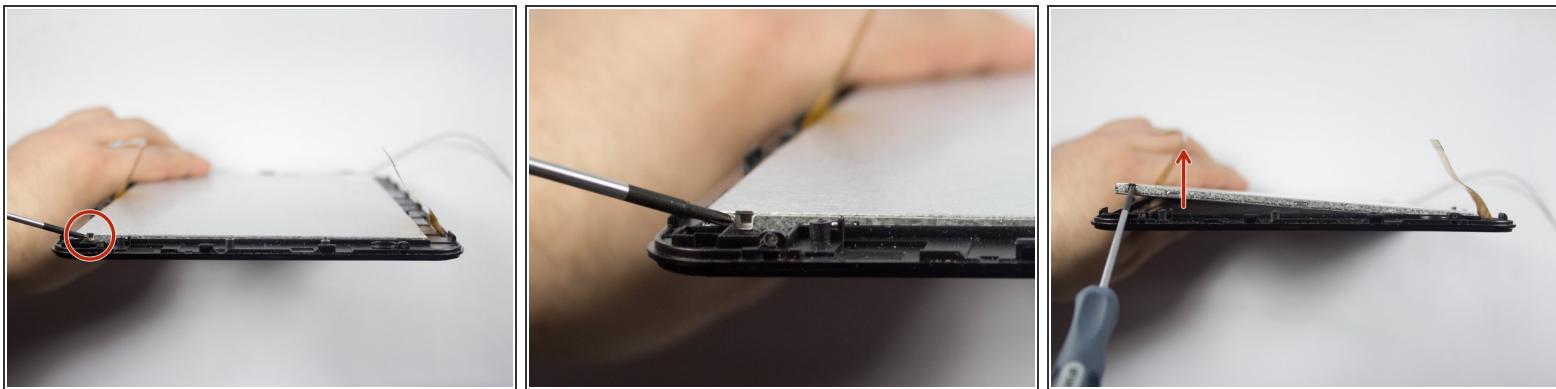

- Find the notch on the digitizer, located on the left side of the device.
- Use the Phillips Screwdriver to gently push the notch and lift the digitizer from the screen.

## Step 4

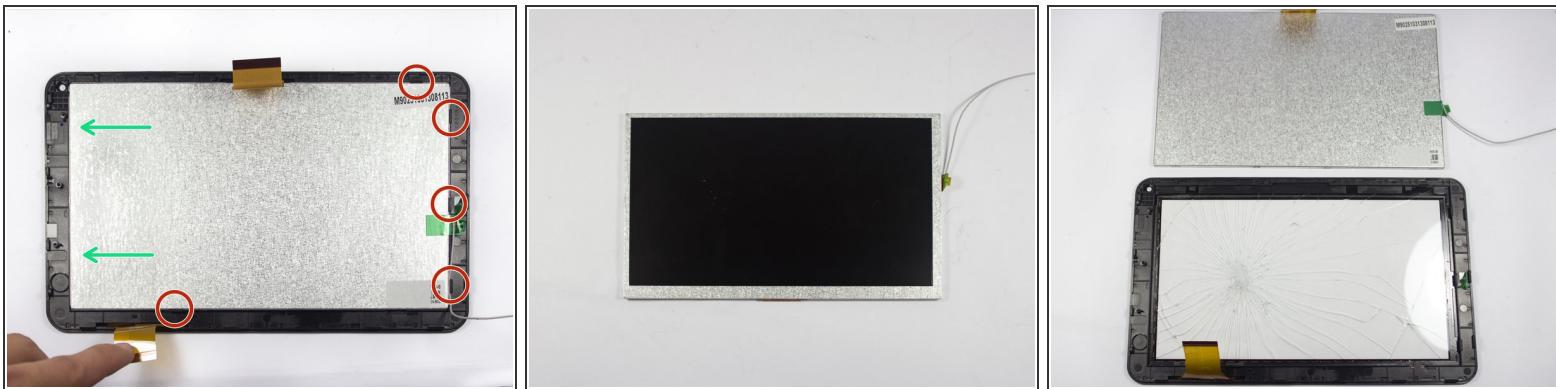

- Gently slide the digitizer from its clasps to remove it from the screen.
- The digitizer should now be removed separately from the screen.

To reassemble your device, follow these instructions in reverse order.