




Asus Chromebook C202 Metal Bracket Replacement

This guide will provide a brief summary to replacing the Metal Bracket in an Asus Chromebook C202.

Written By: Donovan O'Dea

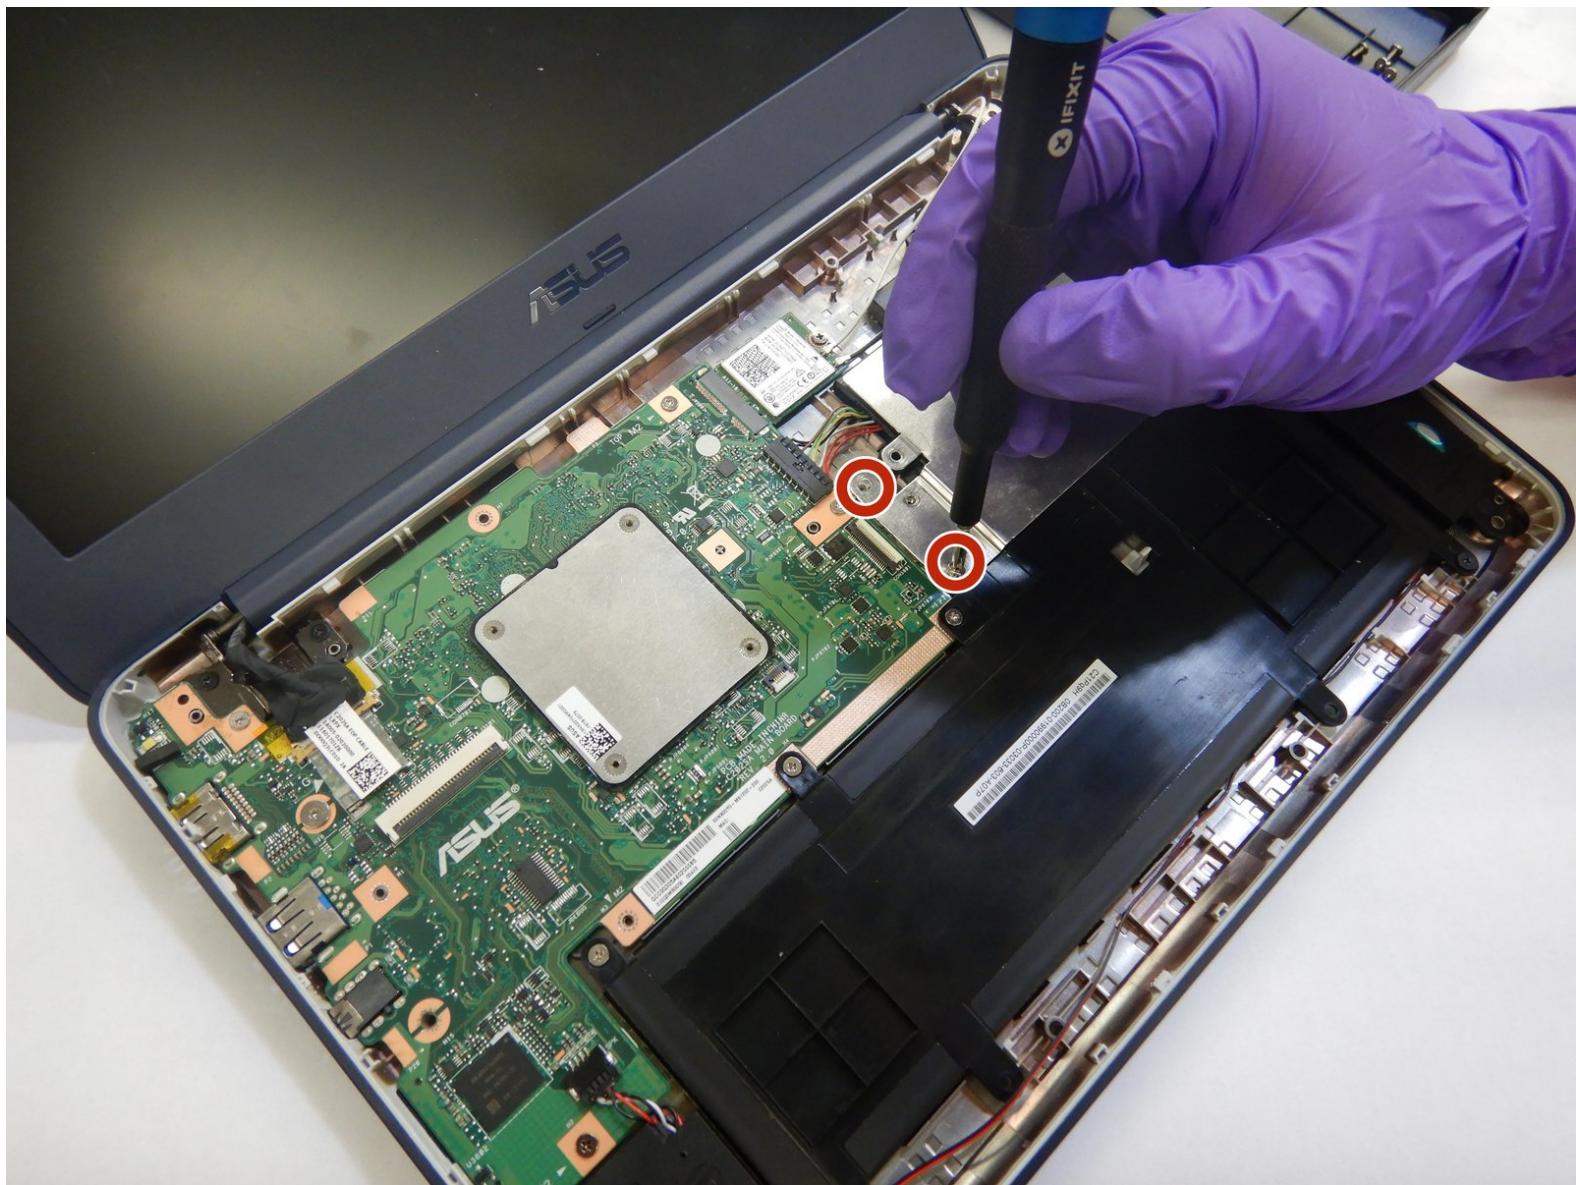

This document was generated on 2020-03-17 03:36:11 PM (MST).


INTRODUCTION

If your Chromebook is heating up unexpectedly and not cooling properly, this guide may help you resolve your issue and get the Chromebook back into working order.

TOOLS:


- [Phillips Head Screwdriver: Size PH1](#) (1)
- [Spudger](#) (1)

Step 1 — Palm Rest

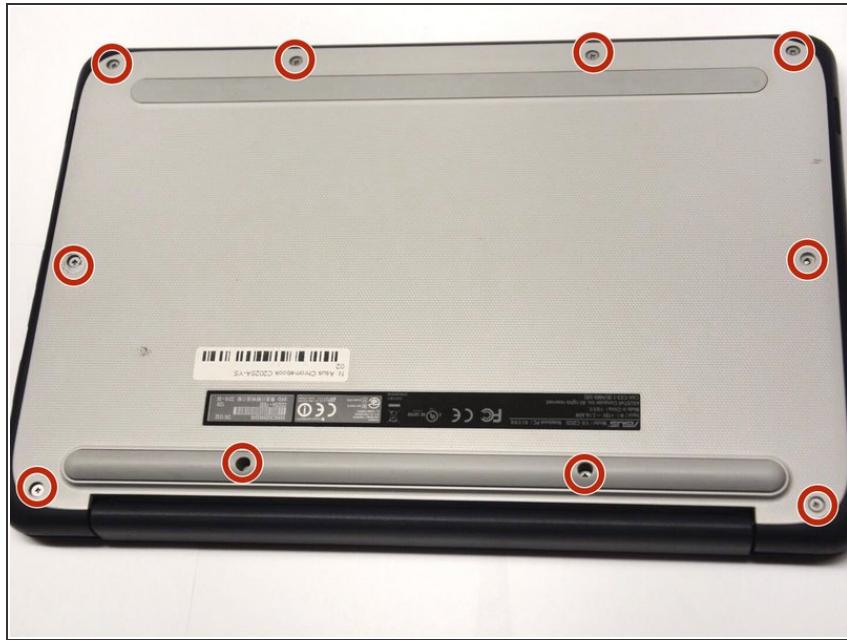


- Turn the device over so the bottom is facing up.
- Remove the ten Phillips #1 8.0 mm screws.

Step 2

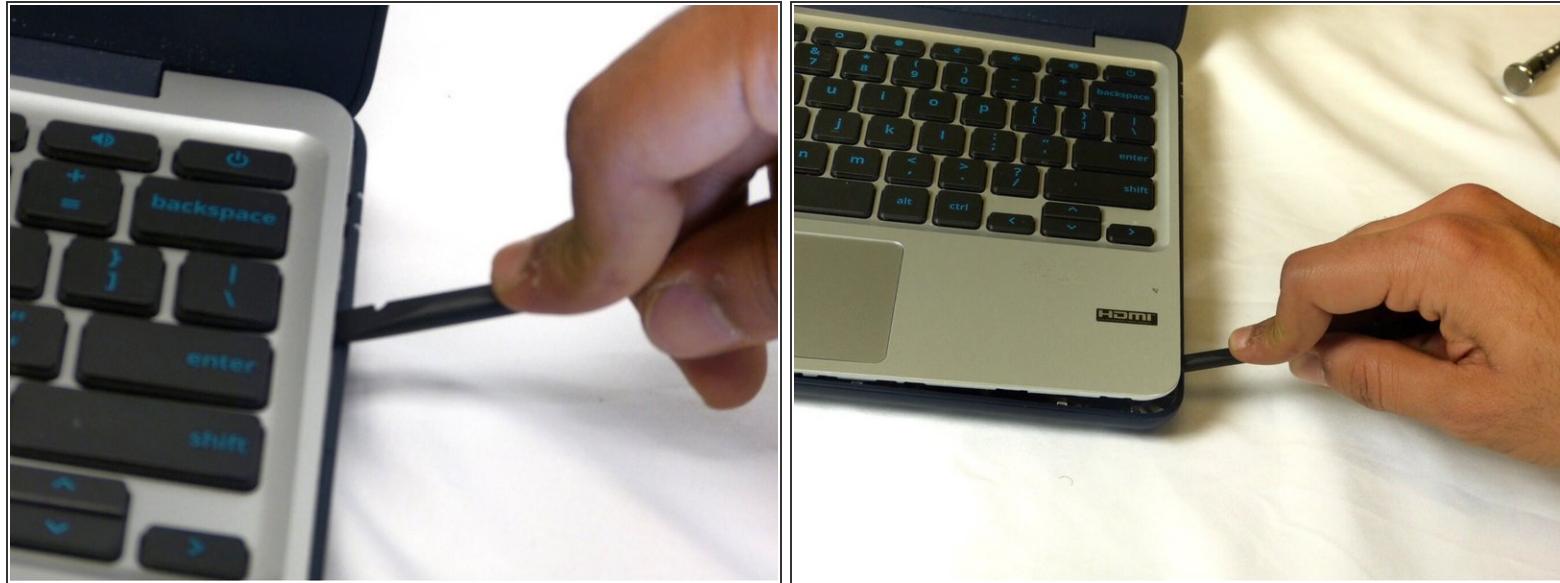


- Carefully use the plastic opening tool to pry the palm rest apart from the bottom cover. Start from one spot and systematically work your way around until the whole palm rest is detached.

Step 3

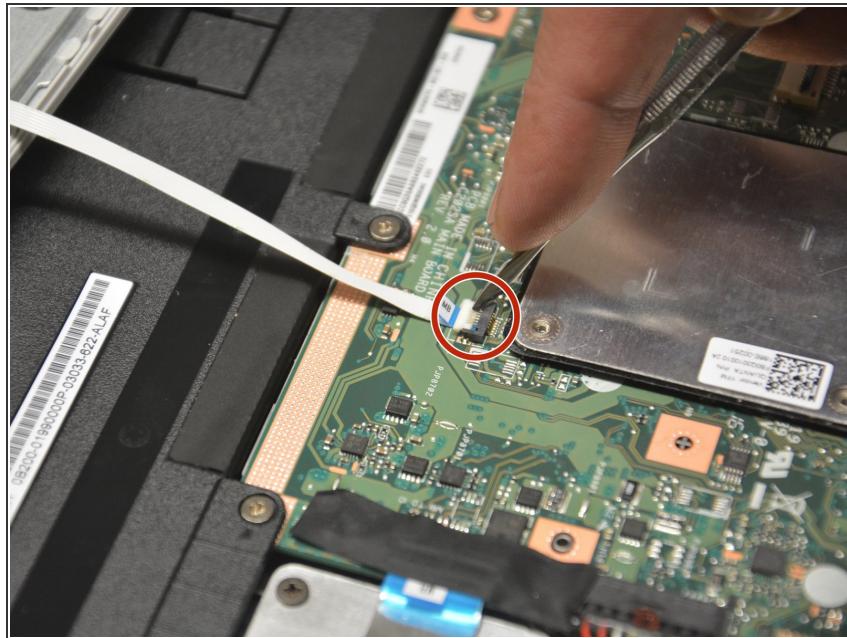


- Disconnect the two cables that run from the keyboard to the motherboard and from the touch pad to the motherboard.
- *(i)* You may have to use a spudger to lift open the respective latches.

Step 4 — Daughterboard

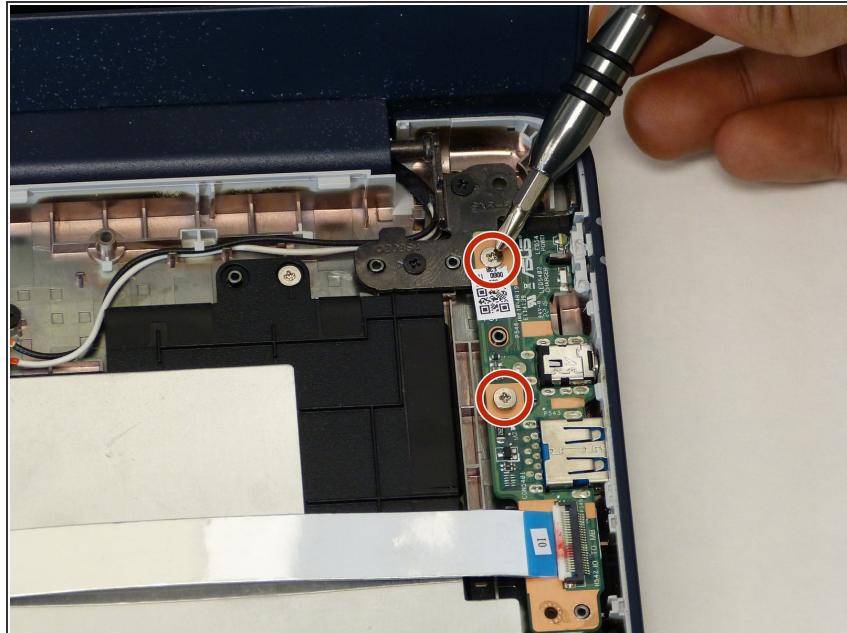


- Remove both Phillips #1 4.5 mm screws from the daughterboard.

Step 5

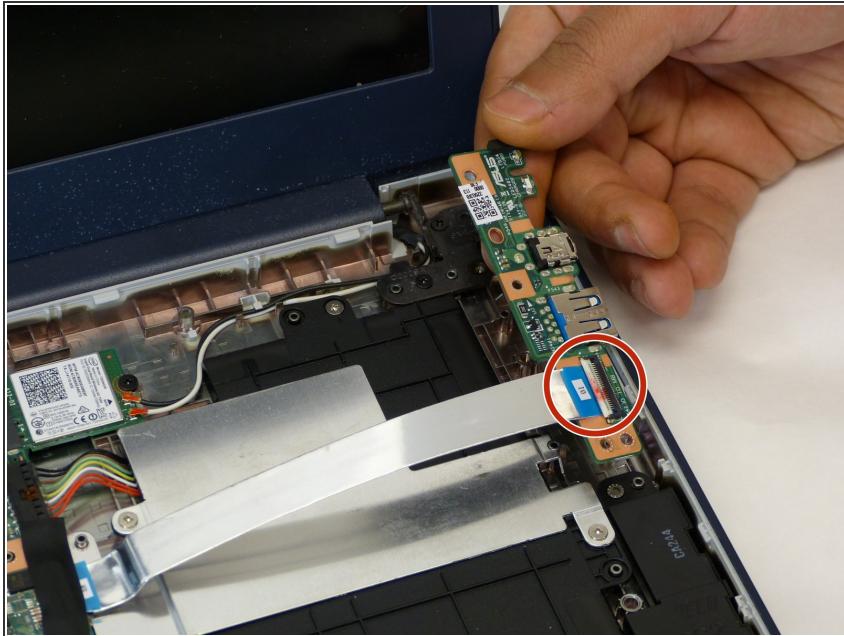

- Gently remove the thin band from the daughterboard. You may have to use a thin blade or spudger to lift the silver clip to release the band.

Step 6 — Metal Bracket

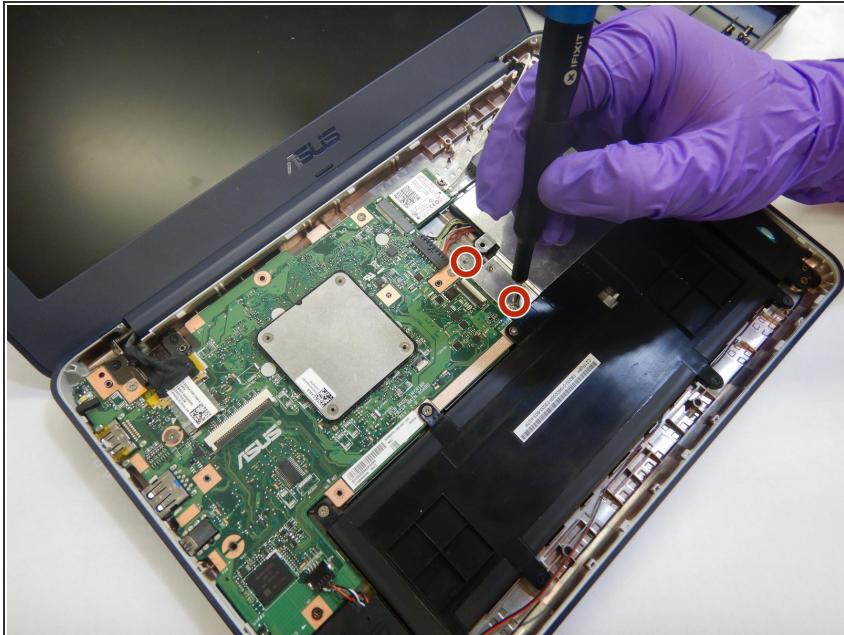

- Use a Phillips screwdriver to remove three 4 mm Phillips #1 screws from the metal bracket.

Step 7



- Once all the screws are removed the metal bracket can be disconnected from the motherboard.
- Remove the metal bracket.

To reassemble your device, follow these instructions in reverse order.