



Asus F6A-X2 Screen for Hinges Replacement

Replacement guide on how to remove the screen from the hinges. Prerequisite-only.


Written By: Jonathan



 **TOOLS:**

- **Phillips #1 Screwdriver (1)**

Step 1 — Screen for Hinges

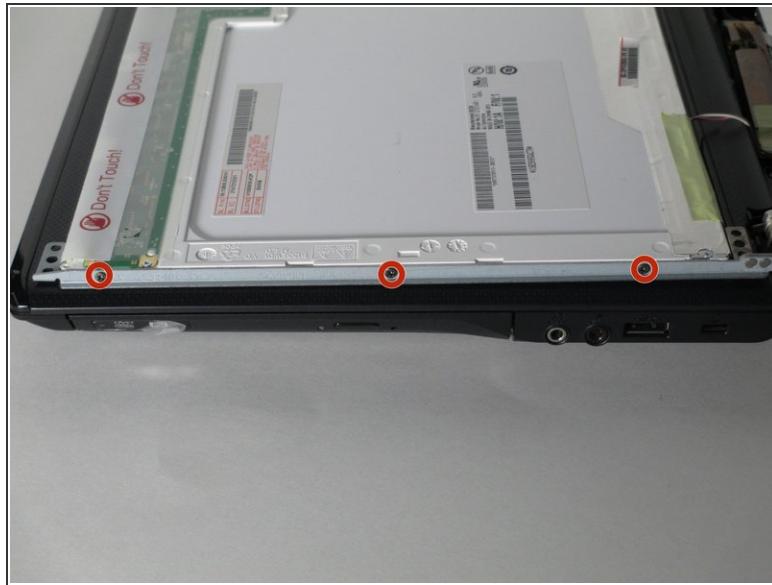

- Remove the six 2 mm Phillips #1 screws securing the hinges to the screen. There are three on each side.
- After the screws are removed, close the laptop and flip it over so it is face down.

To reassemble your device, follow these instructions in reverse order.