




# Asus PadFone S Rear Facing Camera Replacement

This guide will show you how to replace the back camera of your PadFone S.

Written By: Christian Trippe

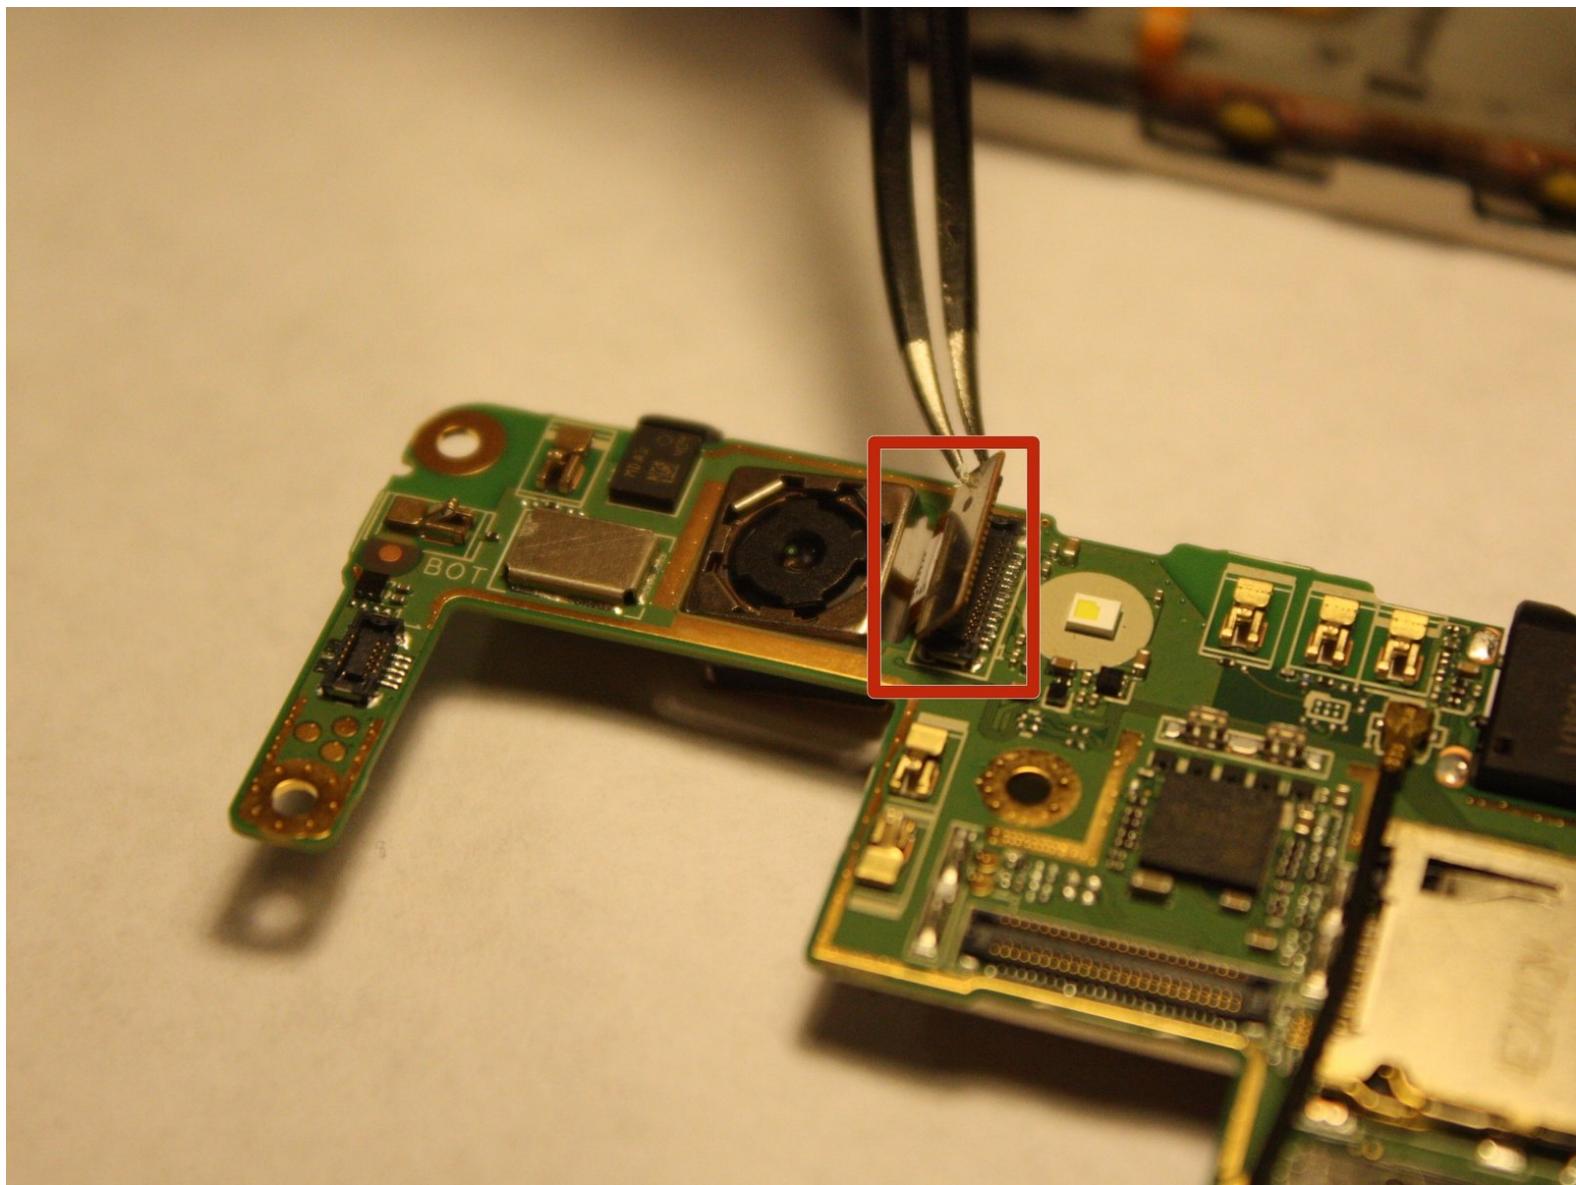

## INTRODUCTION

This guide will show you how to remove the back camera of your Asus PadFone S. There are 3 moderate steps to this guide that require some precision and patience. This guide will make it easy to replace a broken or damaged back camera to get your phone working again. Some common tools are required for this replacement so make sure you have them before you start.

## TOOLS:

- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)

## Step 1 — Remove Back Cover



- Place your thumb in the charging port and pry the back cover off of the phone.
- Separate cover all the way around the sides of the phone.


## Step 2 — Remove Back Panel



- Remove all the screws on the back panel using a T5 Torx screwdriver.
- Lift the back panel off to reveal the logic board and battery.

This document was generated on 2019-09-23 02:33:01 PM (MST).

## Step 3 — Remove Back Camera

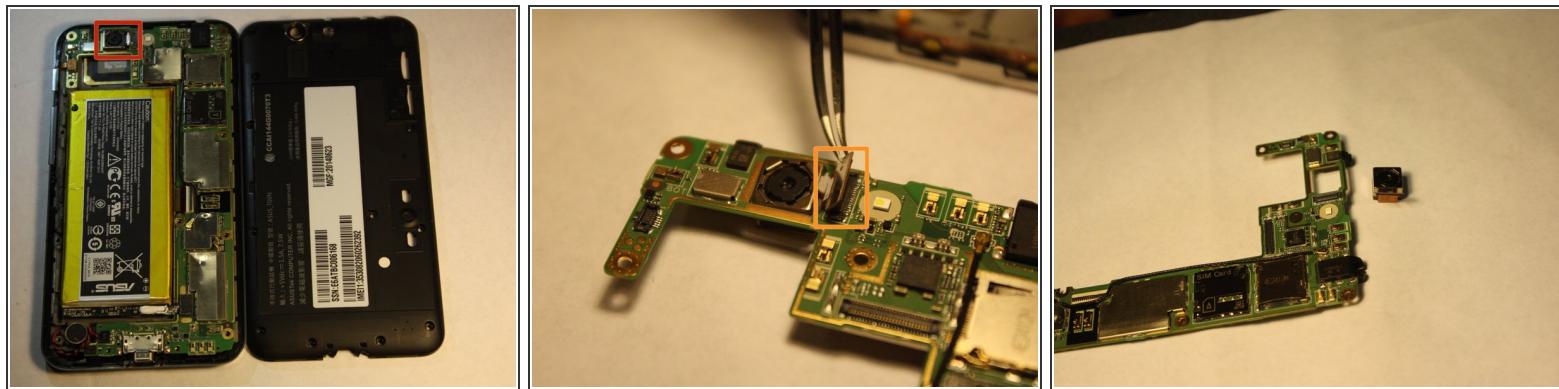

- The back camera is located at the top left on the logic board.
- Use tweezers to lift back camera strip from logic board.
- Lift back camera out of logic board.

*(i)* It is not necessary to remove logic board for removal of the back camera.

To reassemble your device, follow these instructions in reverse order.