



Asus Padfone X Mini Speaker Replacement

How to replace a Asus Padfone X mini speaker.

Written By: Nicolette Carr



 **TOOLS:**

- [T5 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Speaker



- With the phone facing down, look at the bottom right side corner and there should be a groove. Use a plastic opening tool and lift up to remove outside cover.

 This is not the cover with the speaker attached.

Step 2



- Lift the battery out from the top of the device.

Step 3




- Around the perimeter, there should be 10 2 mm T5 Torx screws. Take them out.
- Remove the cover.

Step 4



- Turn the cover over.
- *(i)* The speaker is attached to the inside of the cover and to the right of the camera hole.

Step 5

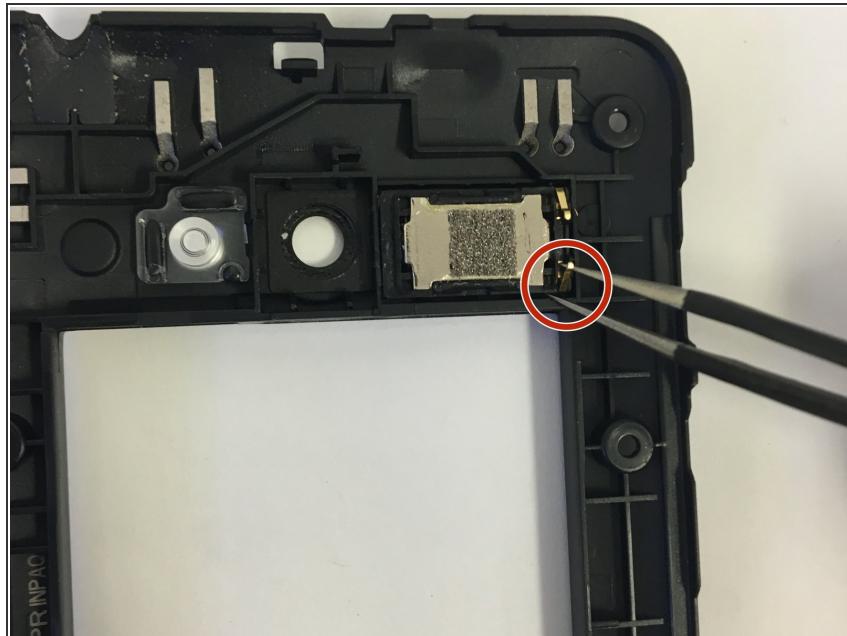

- Remove speaker with standard tweezers to minimize damage, and replace.

To reassemble your device, follow these instructions in reverse order.