Asus Q302UA-BHI5T20 WAN Card Replacement

This guide will be replacing the WAN Card.

Written By: crystal Agwuncha

   www.iFixit.com

INTRODUCTION

This guide will be replacing the WAN Card.

🔧 TOOLS:

- iFixit Opening Tools (1)
- Phillips #0 Screwdriver (1)

Step 1 — WAN Card
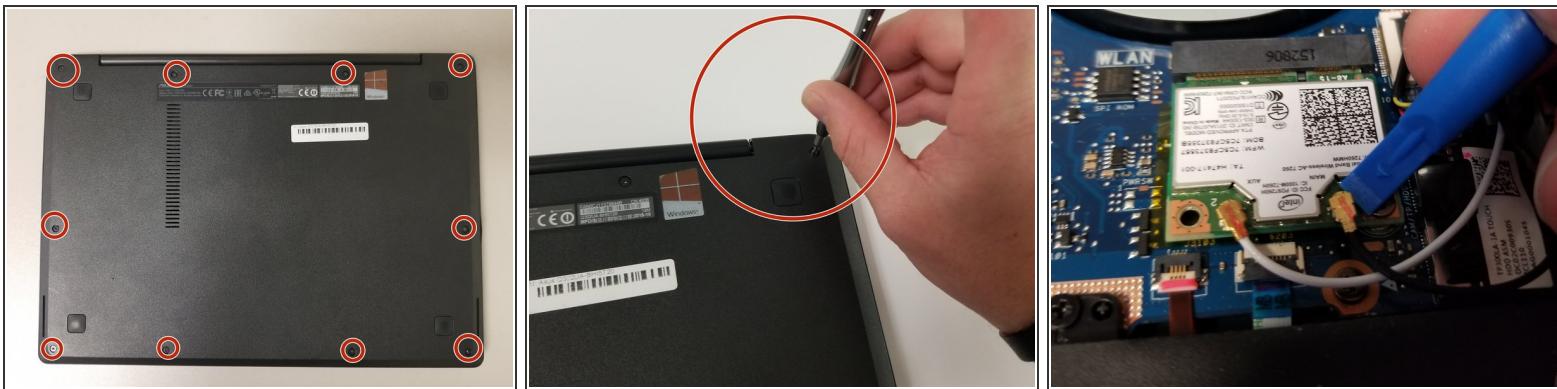
- Turn over the laptop and remove cover by unscrewing highlighted screws

- Take blue pry tool in ifixit toolkit and pull up the antenna connector

Step 2
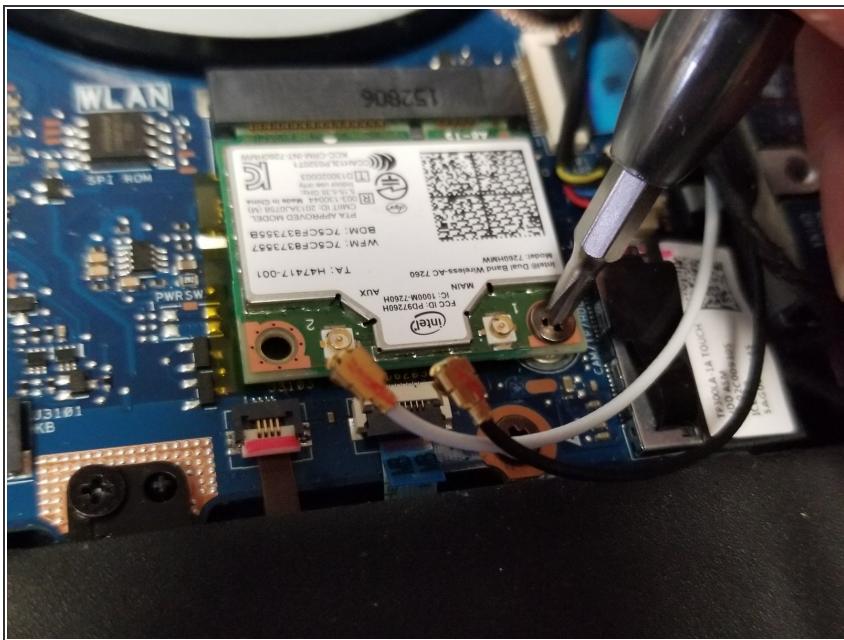
- Locate black screw located around antenna and unscrew it

  ⚠️ WAN will pop up from opposite pressure

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-28 02:45:25 PM (MST).