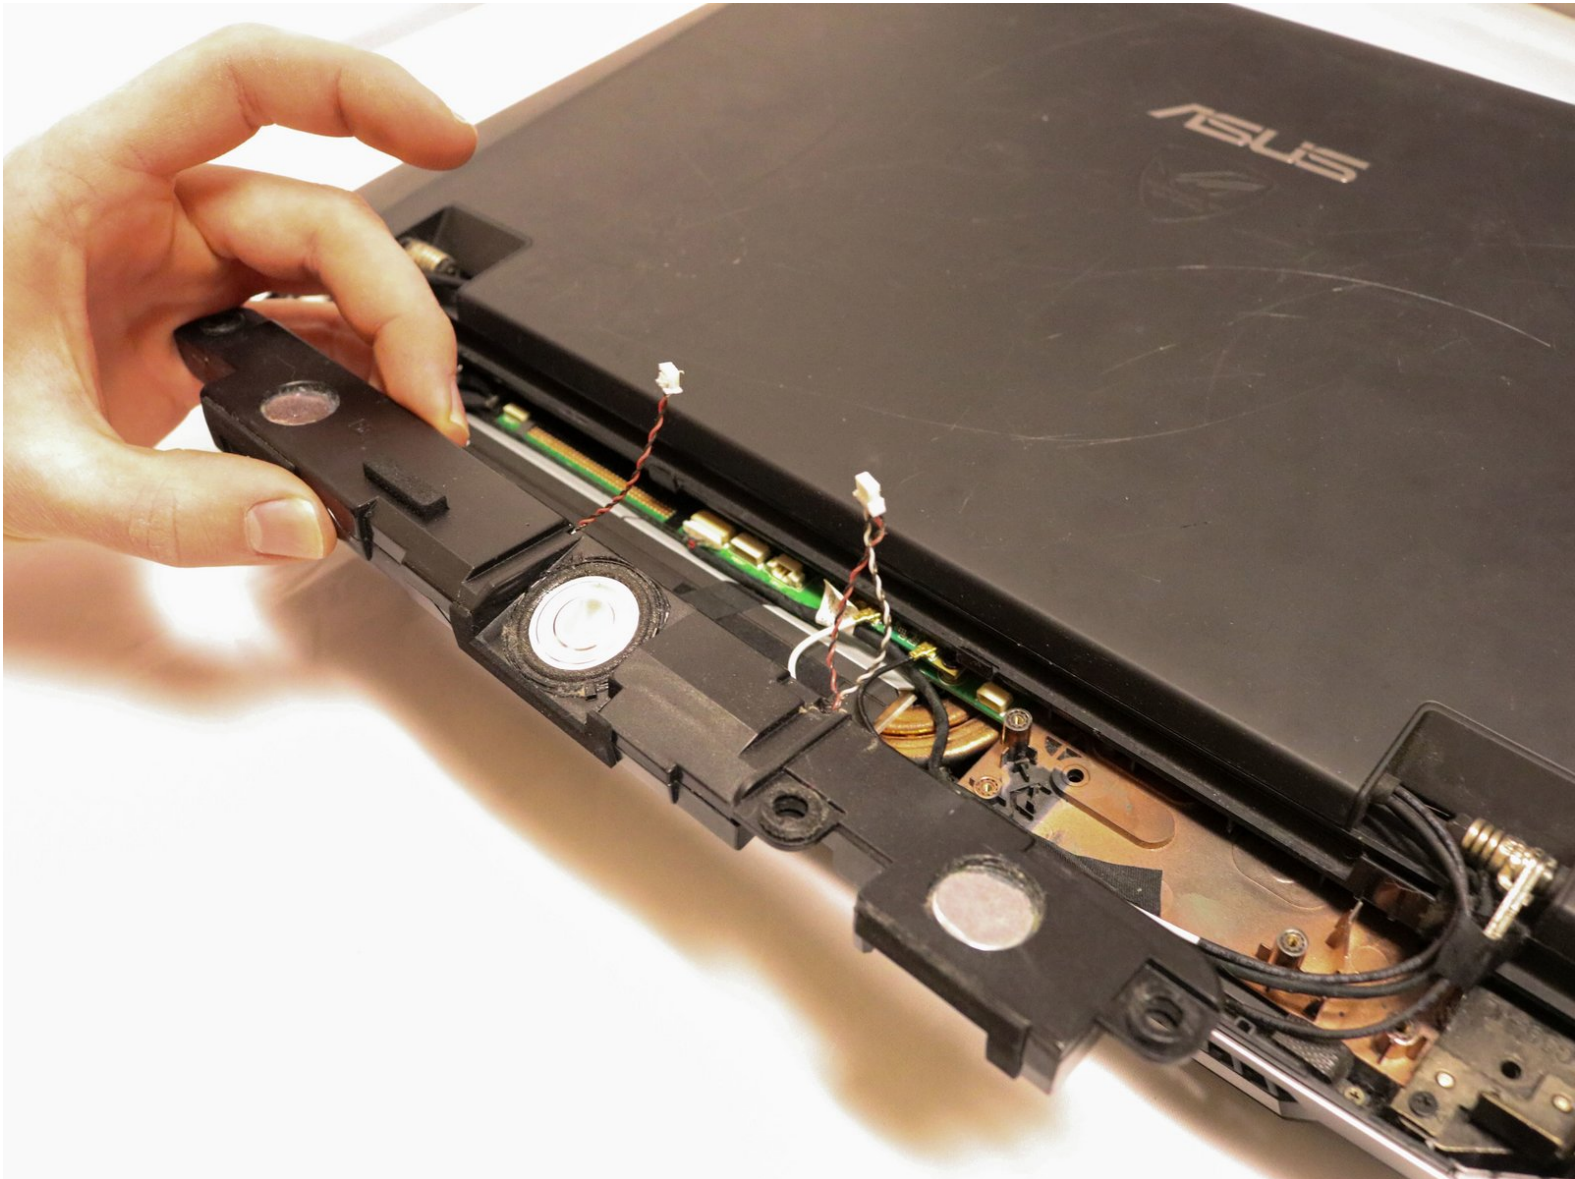# Asus ROG G55VW-DH71 Sound Bar Replacement

How to replace speakers in the Asus ROG G55VW-DH71.

Written By: Savanna Stockman

INTRODUCTION

Experiencing audio troubles with your Asus ROG G55VW-DH71? Simply replace it by using this five step guide!

Great audio is a necessity for any computer user and your ROG G55VW-DH71 may be in need of an upgrade. Through this guide, your auditory needs and computer experience can be enhanced in only two minutes.
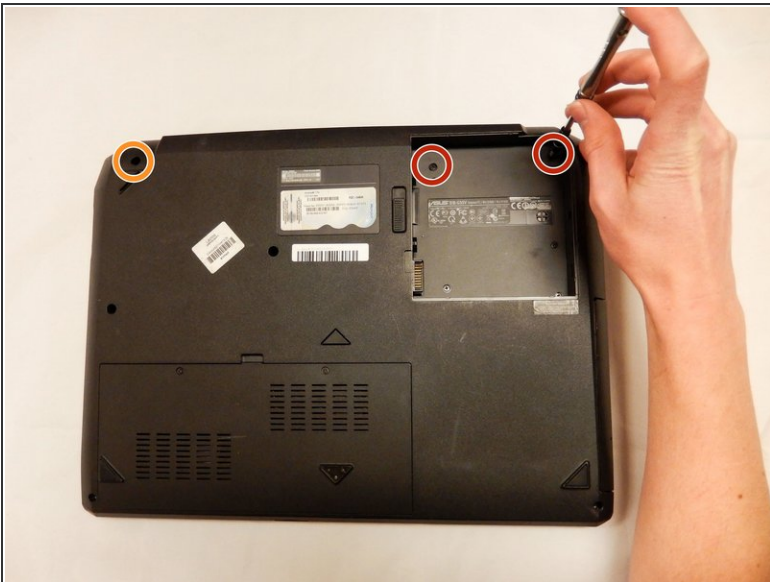
🔧 **TOOLS:**
- Phillips #0 Screwdriver (1)
- Phillips #00 Screwdriver (1)
- iFixit Opening Tools (1)
- Tweezers (1)

This document was generated on 2020-01-14 05:42:26 AM (MST).

www.iFixit.com

Step 1 — Sound Bar

- Side the switch and lift the battery from the back of the device.

Step 2

- Using the PH0 screw driver remove both 4.4 mm screws.
- Using the PH0 screw driver remove the 6.4 mm screw.

This document was generated on 2020-01-14 05:42:26 AM (MST).

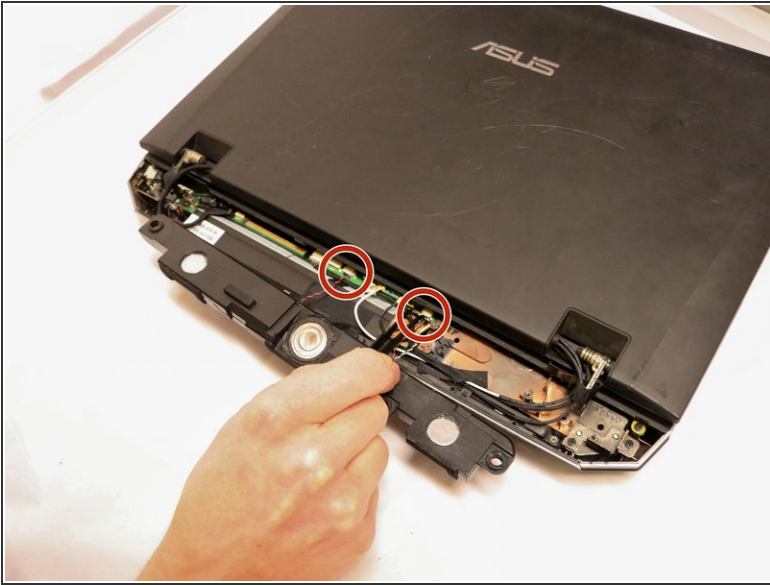© iFixit — CC BY-NC-SA | www.iFixit.com | Page 3 of 5

Step 3

- Using the iFixit opening tool, gently pry open the plate covering the spine of the device.

Step 4

- Using the PH 00 screwdriver, remove the three 10.6 mm screws holding the sound bar down.

This document was generated on 2020-01-14 05:42:26 AM (MST).

© iFixit — CC BY-NC-SA   www.iFixit.com   Page 4 of 5

Step 5

- Using the bent black tweezers, remove both wires connecting the sound bar to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-01-14 05:42:26 AM (MST).