



Asus ROG G750JM-BSI7N23

Soundbar/speaker Replacement

Replacement or repair of soundbar/speaker on Asus ROG G750JM-BSI7N23.

Written By: Tanner



INTRODUCTION

Use this guide if you are having troubles getting your speakers to work at optimal performance or if there is no sound coming out of your speakers at all.

TOOLS:

- [Phillips #2 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Soundbar/speaker



- Using a plastic opening tool, remove the two rubber tabs circled in red.

Step 2



- Remove both of the 8mm Phillips #2 screws from these slots where the rubber caps were removed.

Step 3



- Slide the tab to pop the battery out of its holder.
- Pull the battery out of its slot.

Step 4




- Remove the three 4mm Phillips #2 screws from the open battery slot as shown.
- Remove the two 5mm Phillips #2 screws.

Step 5



- Begin prying up on the plate as shown in the pictures.

Step 6

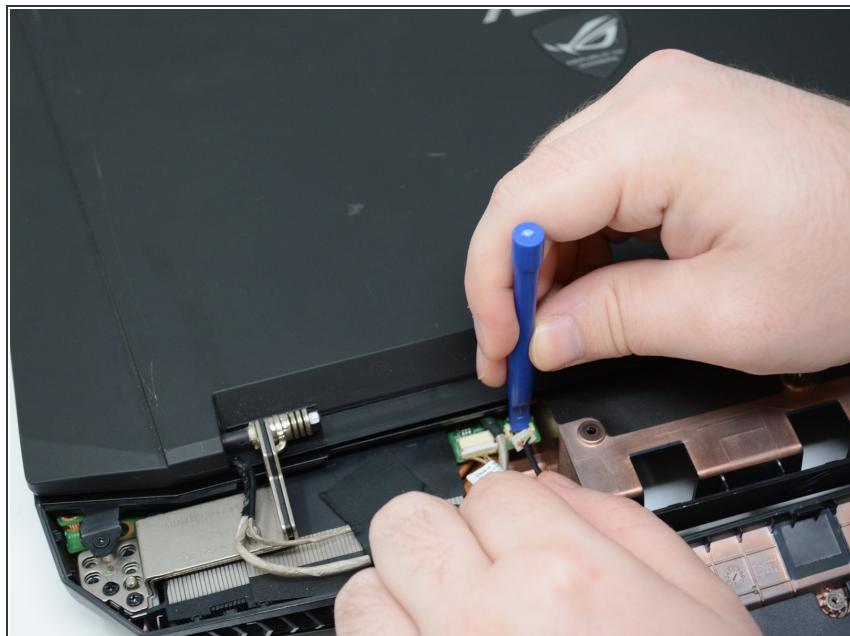

- Detach the single connector using your plastic opening tool.
- Remove the speaker bar.

To reassemble your device, follow these instructions in reverse order.