



# Asus ROG G751JL-BB17T29 Top Rear Panel

Prerequisite guide for the removal of the Top Rear Panel.

Written By: Kristofer Cesaroni




## INTRODUCTION

Prerequisite guide for the removal of the Top Rear Panel.

### TOOLS:

- **Tweezers** (1)
- **Phillips #1 Screwdriver** (1)
- **Spudger** (1)

## Step 1 — Top Rear Panel

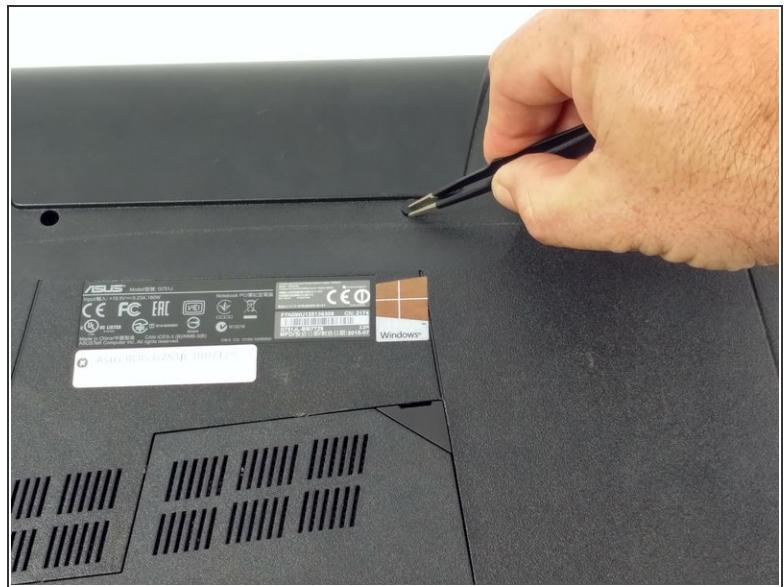

- Remove the four rubber stoppers at the hinge edge of the laptop.

## Step 2



- Remove the four 8.5 mm Phillips #1 screws at the hinge edge of the laptop.

## Step 3



***(i)*** The speakers are located on the top facing side of the computer, next to where the screen connects to the base.

- Using a nylon spudger, carefully pry the top back panel off to reveal the speakers.

**⚠** While removing the top back panel, be careful not to break the four pin connector located underneath.

## Step 4



- Disconnect the four-pin connector and remove the top back panel from the computer.

To reassemble your device, follow these instructions in reverse order.