




Asus TUF Gaming FX705G Speakers Replacement

This guide will show you how to safely and carefully replace the speakers in your Asus TUF Gaming FX705G laptop.

Written By: Alanna Campbell

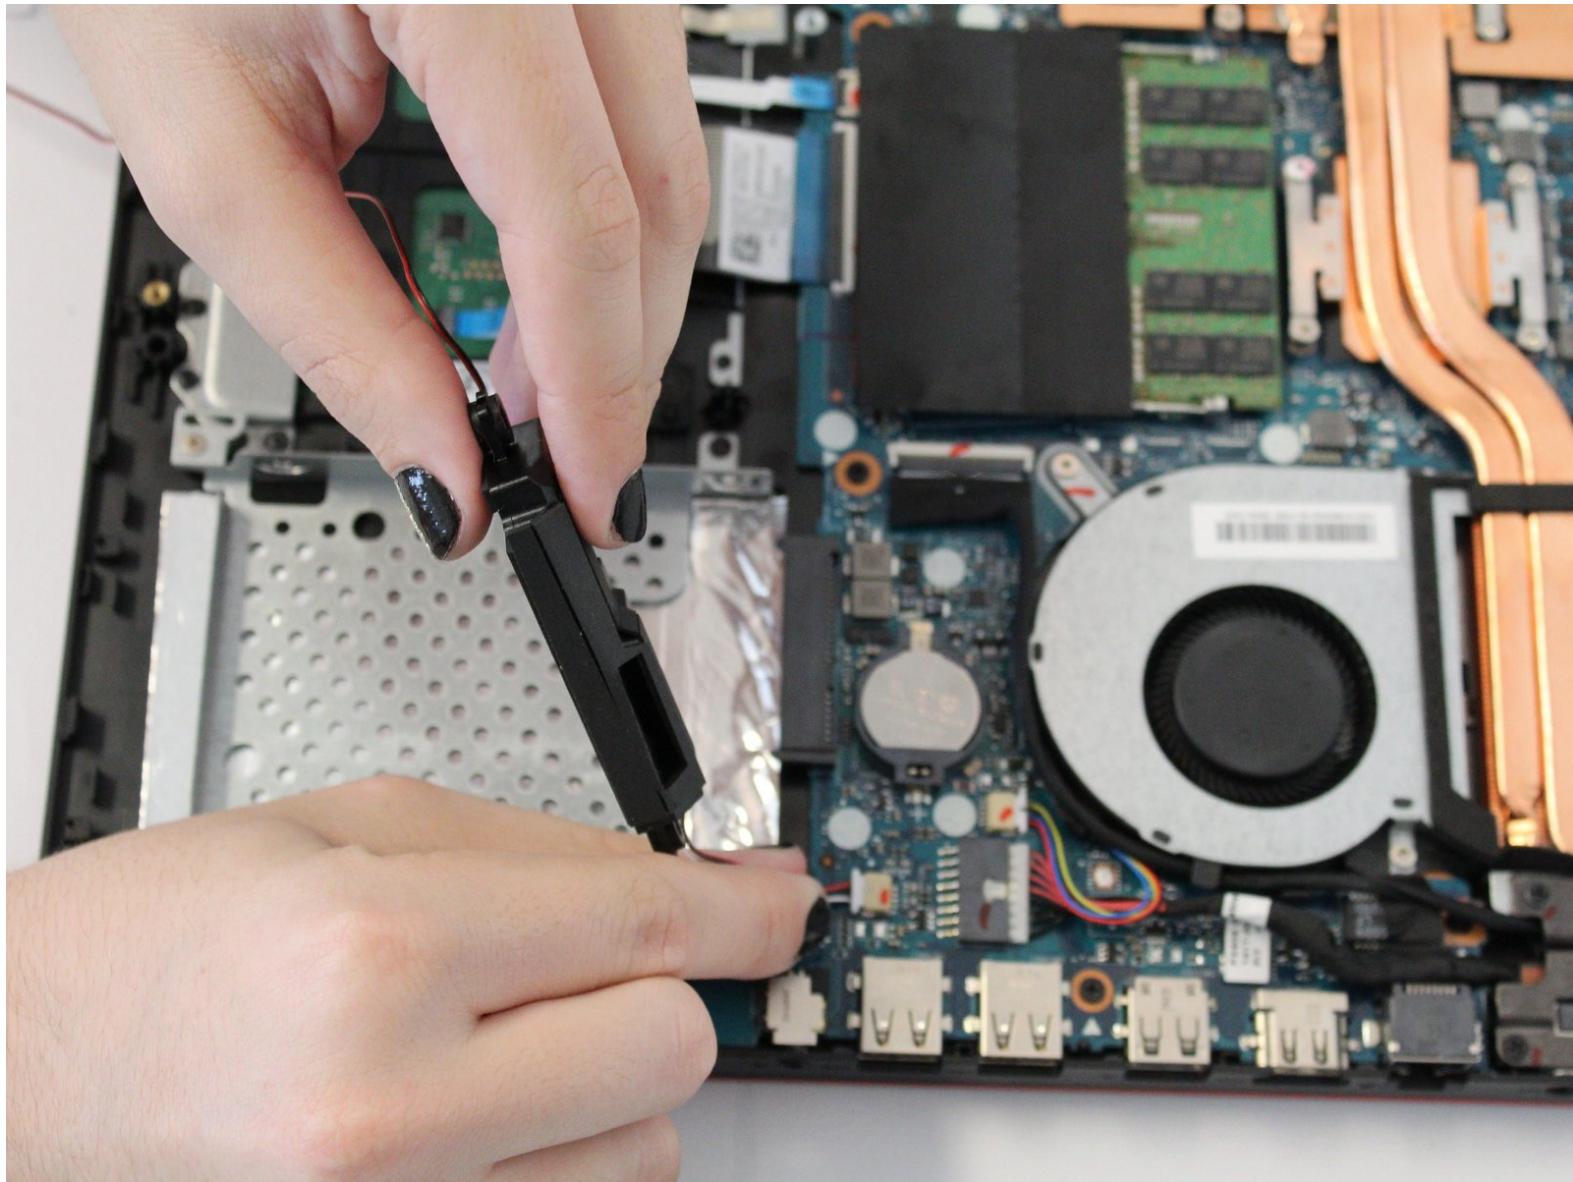

This document was generated on 2020-04-06 04:04:30 AM (MST).



INTRODUCTION

Be sure to review your Owner's Manual for specific hazards and safety concerns when repairing or replacing your Asus TUF Gaming FX705G.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)

Step 1 — Back Cover

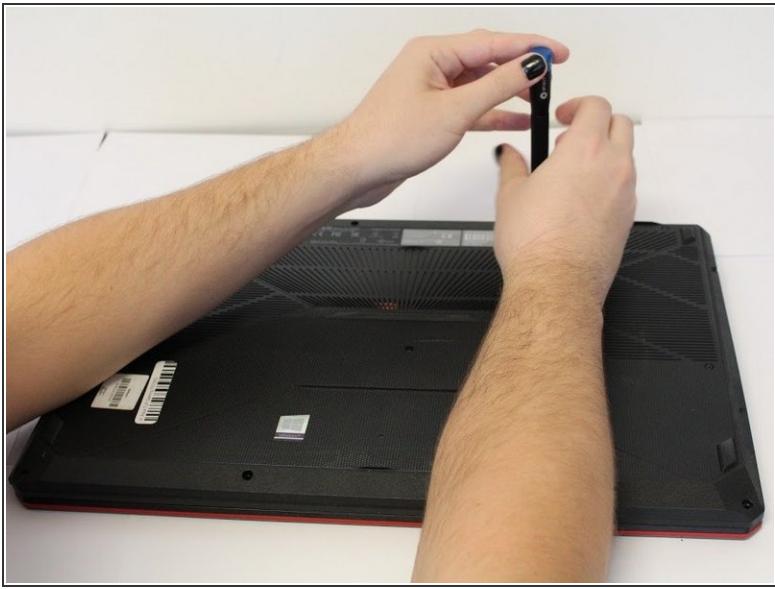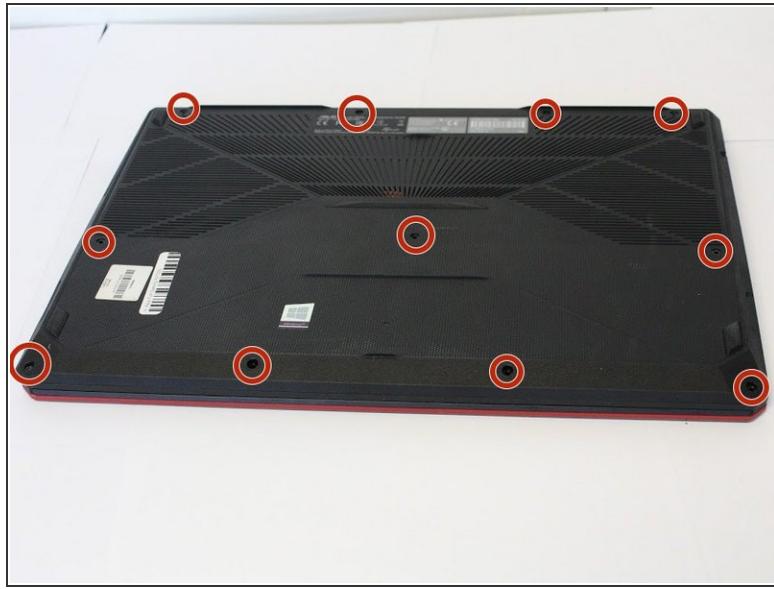



- Remove the eleven Phillips #0 screws that secure the back cover.

Step 2




- Use the iFixit opening tool to lift the back cover's seam, then insert the spudger parallel to the back cover and lift gently upward.
- You will hear pops as the back cover releases.

Step 3 — Battery

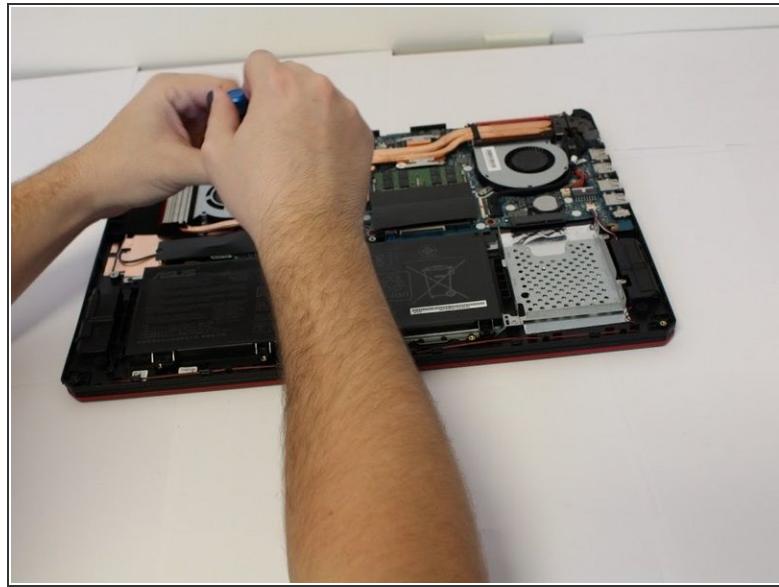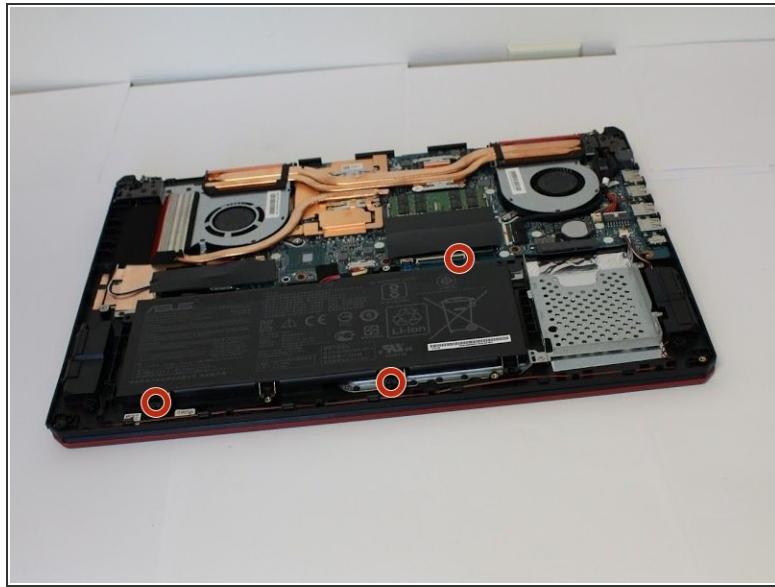



- Remove the three Phillips #00 screws from the battery housing.

Step 4

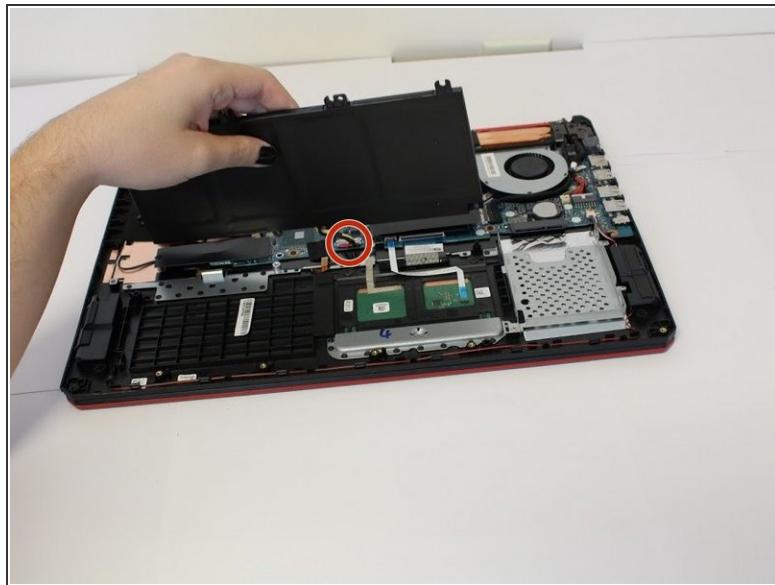

- Disconnect the wire from the motherboard, and lift the battery from its housing.

Step 5 — Speakers

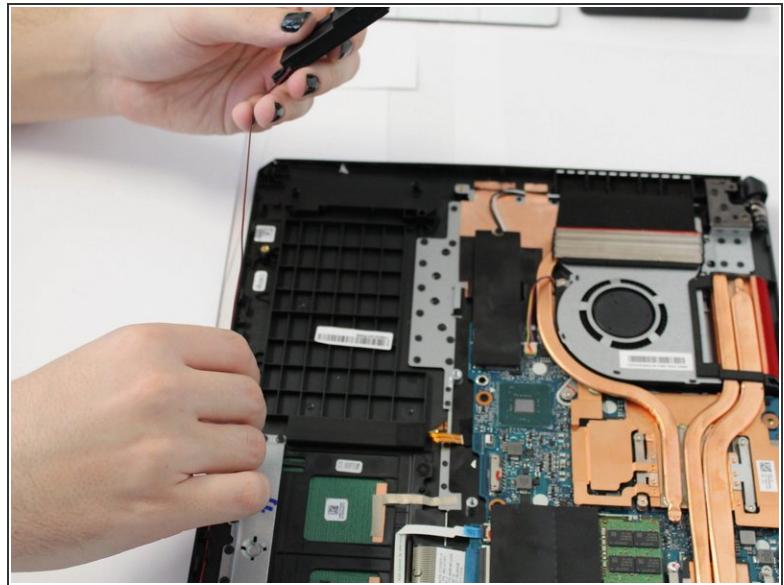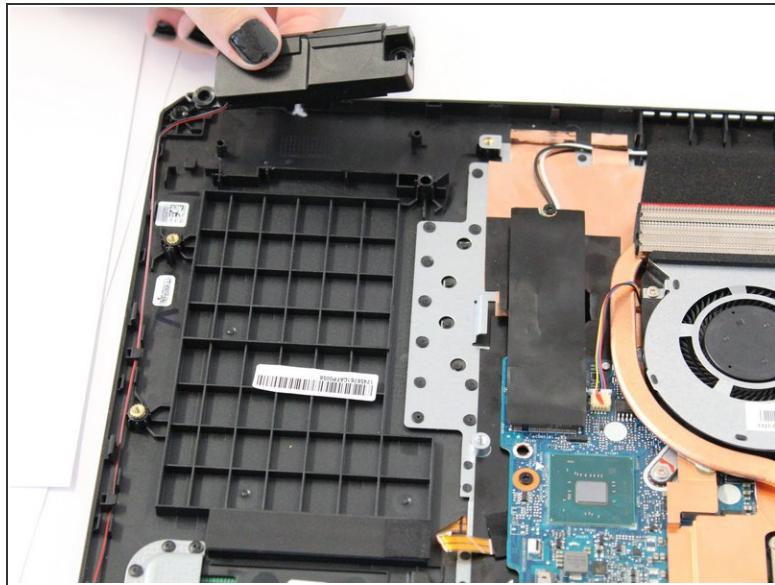


- Use your fingers to lift the speaker from the housing and follow the wire path carefully, lifting the wire out of place around the base.

Step 6



- Repeat the removal process on the second speaker, being careful not to rip the wire.

Step 7

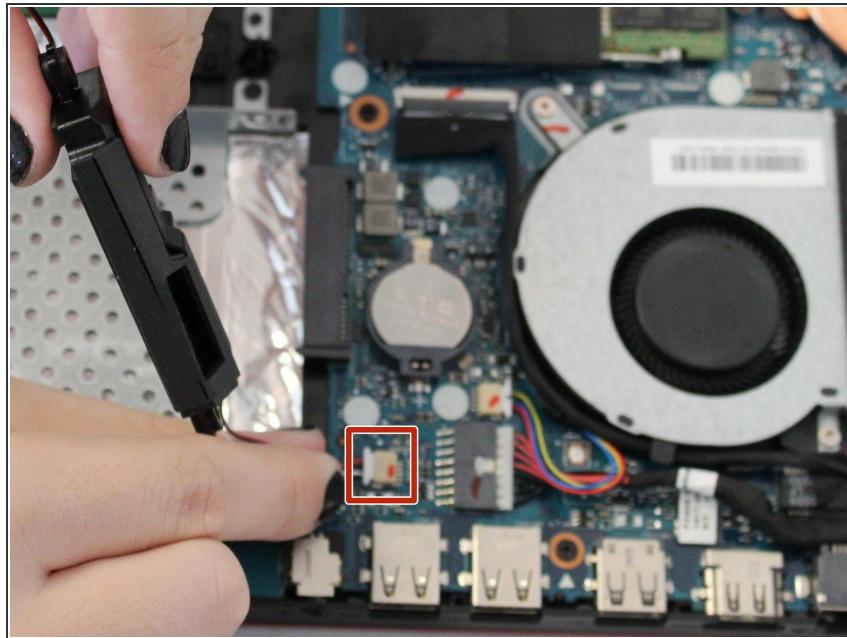

- With the second speaker removed from the track, carefully disconnect the three wires from the insert on the motherboard.

To reassemble your device, follow these instructions in reverse order.