




Asus Transformer Pad TF103C Headphone Jack Replacement

Replacing the headphone jack on an Asus Transformer Pad TF103C.

Written By: Tyler Ellis

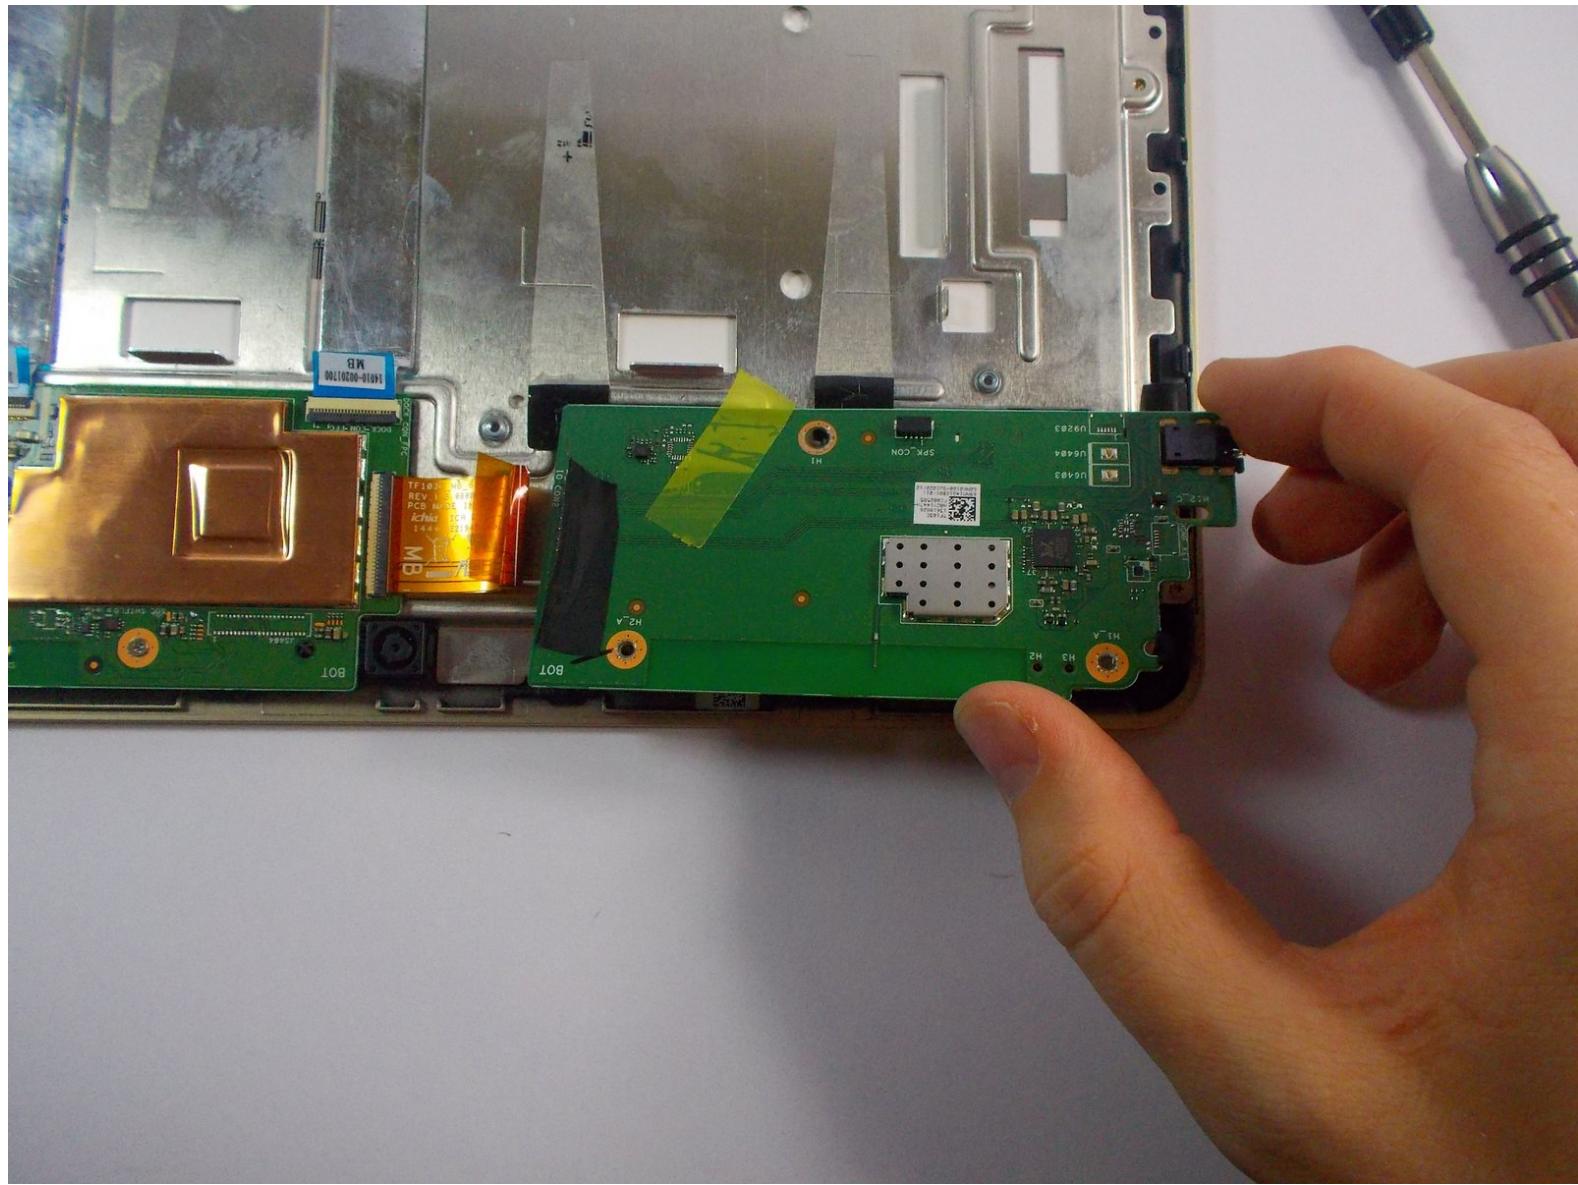




PARTS:

- [ASUS Transformer Pad \(TF103C\) Headphone Jack Assembly \(1\)](#)

Step 1 — Headphone Jack

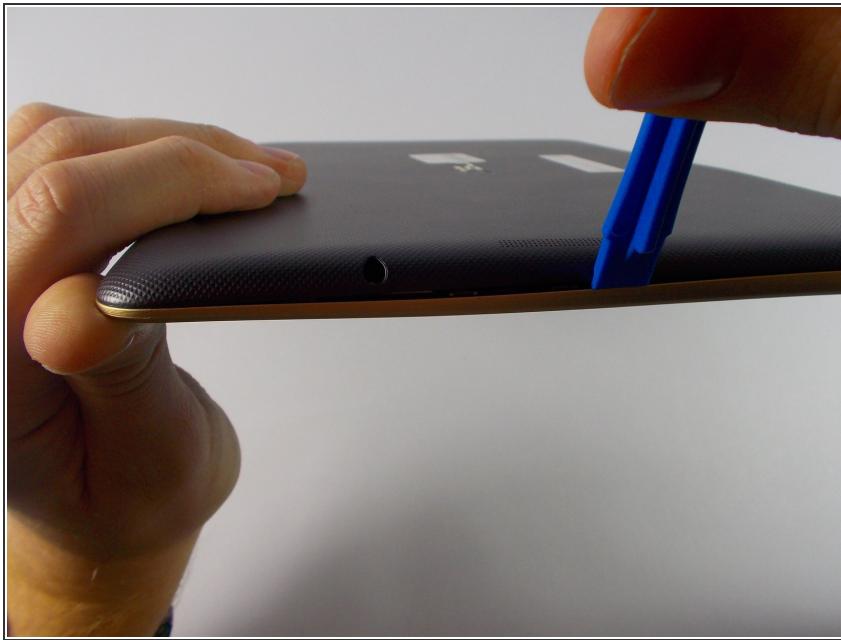

- Make sure power is off.
- Insert plastic opening tool on the side of the tablet.

i You can use a thin screwdriver if you don't have an opening tool.


- Gently pull upwards and carefully pry open the Transformer pad.

Step 2




- Slide the tool along all four edges and continue to pull the tool upwards.

Step 3

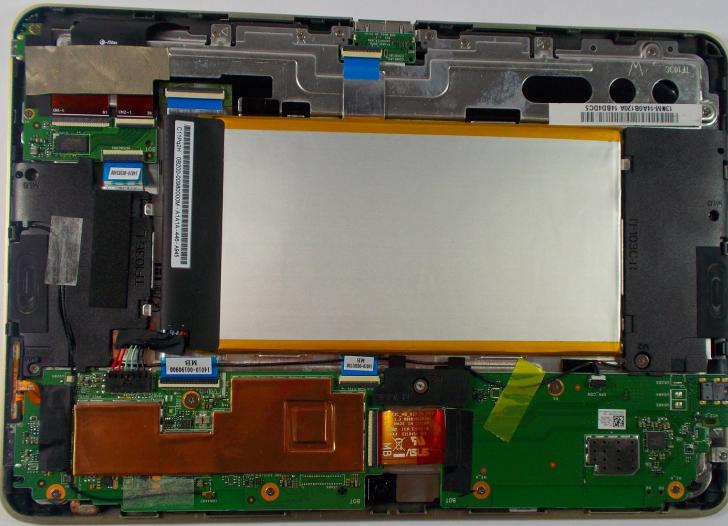


- Remove the back cover once it is detached and set it aside.
- Rotate tablet to match picture to make the guide easier to follow

Step 4

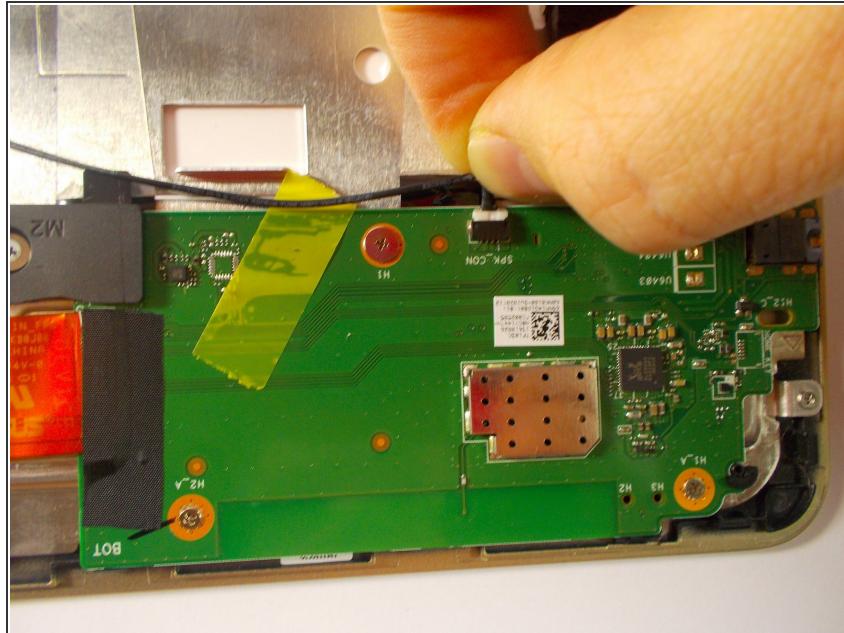


- Remove the tape and unplug wire that attaches to both speakers from soundboard.

Step 5

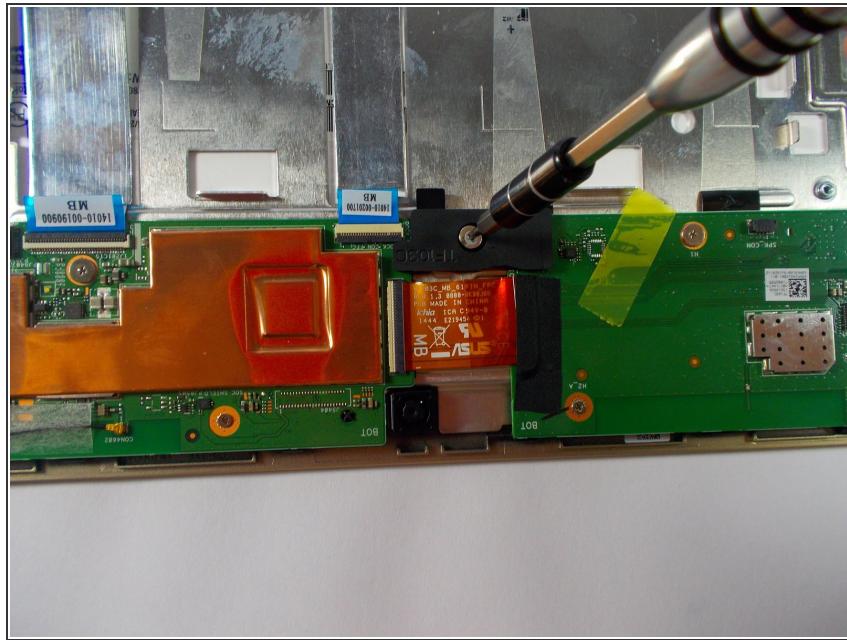


- Use the +J000 screwdriver to unscrew and remove the M2 plastic holder.

Step 6

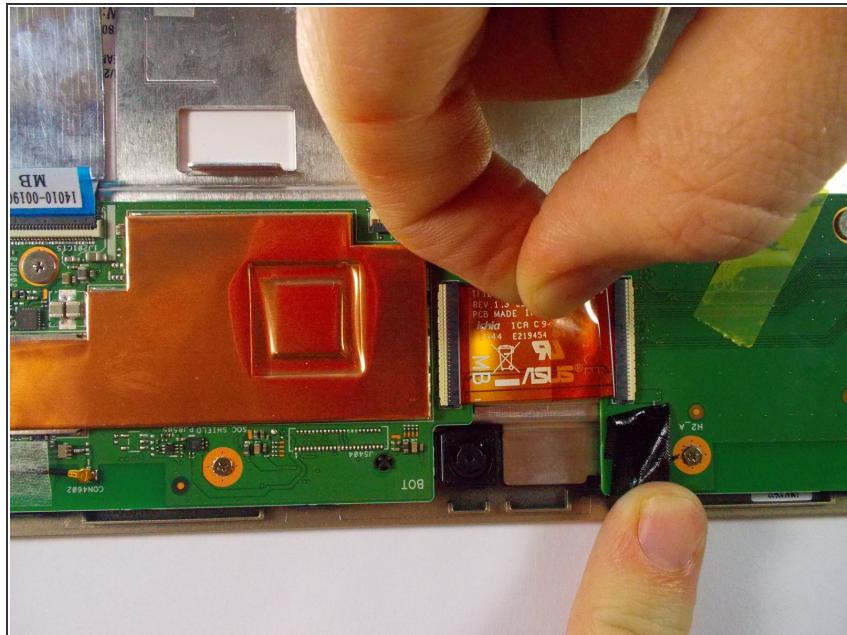



- Remove black tape from ribbon cable and separate the cable from the soundboard.

Step 7

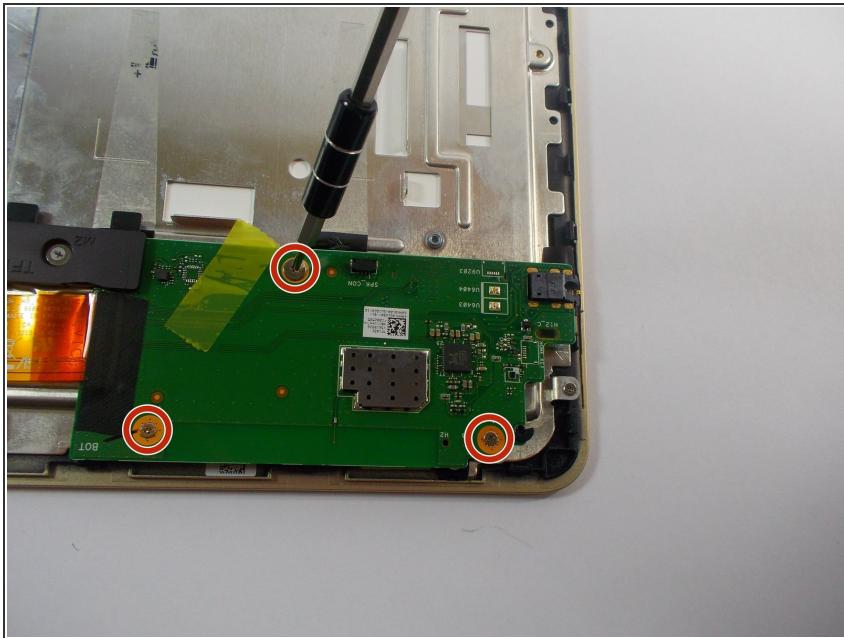

- Use the +J000 to remove three screws from soundboard.
- ▣ Keep the screws together and organized. (Label, if necessary).

Step 8

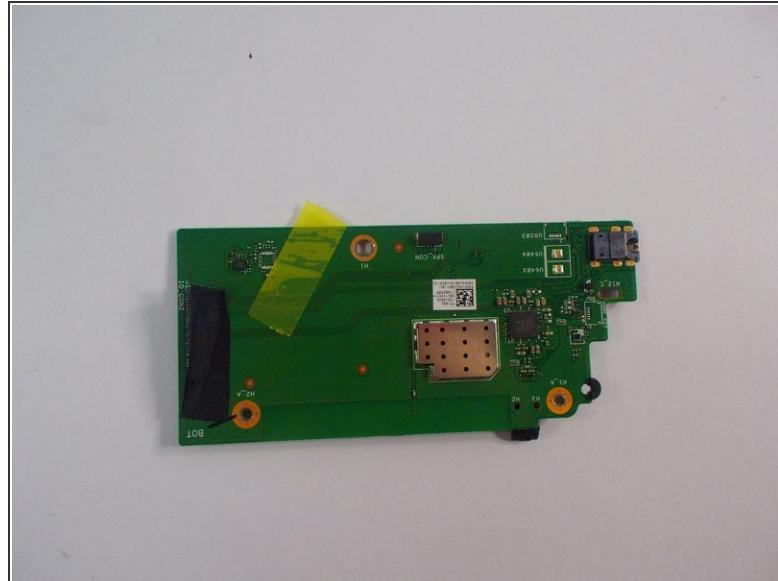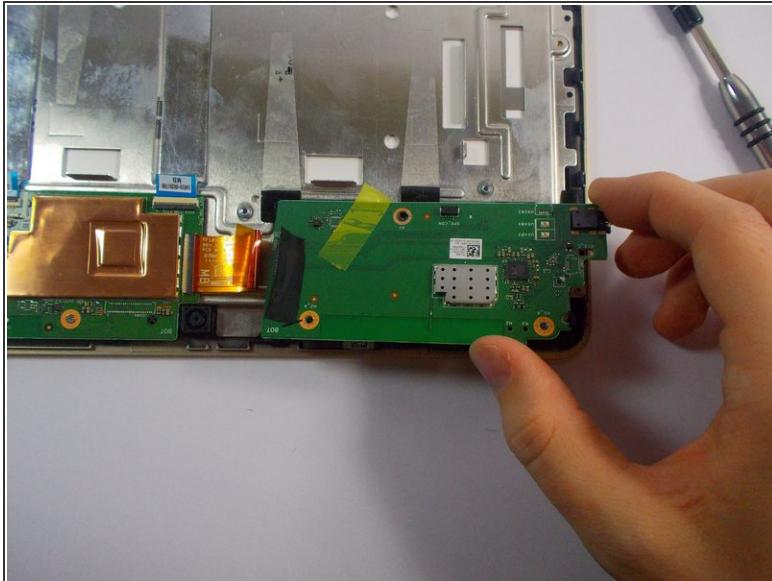

- Remove soundboard which has the headphone jack attached to it.

To reassemble your device, follow these instructions in reverse order.