




Asus Transformer Pad TF103C Speakers Replacement

Replacing the speakers on an Asus Transformer Pad TF103C.

Written By: Tyler Ellis

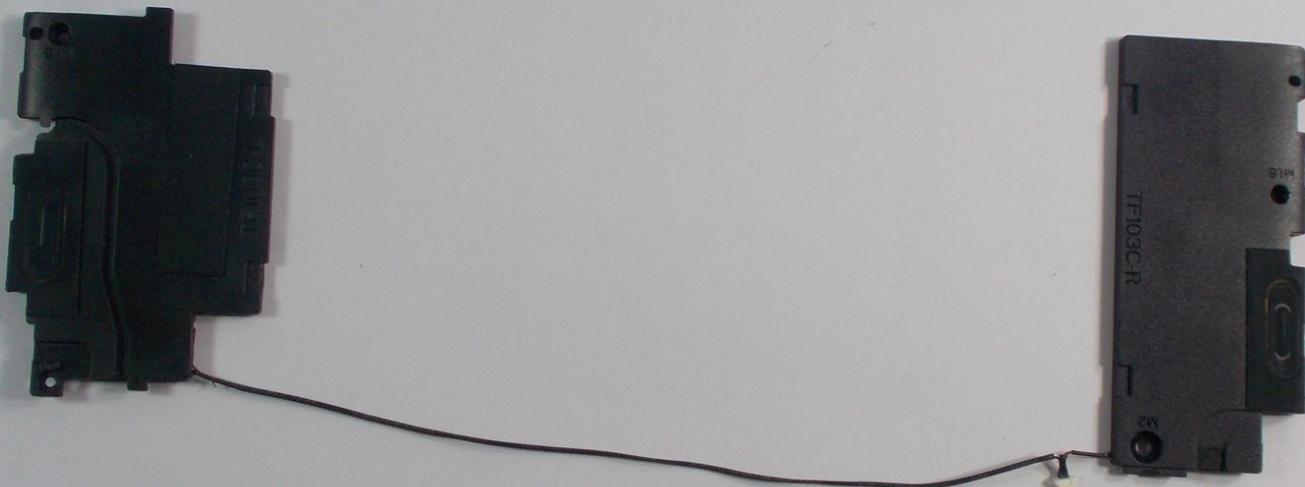




PARTS:

- [ASUS Transformer Pad \(TF103C\) Speaker Assembly \(1\)](#)

Step 1 — Speakers

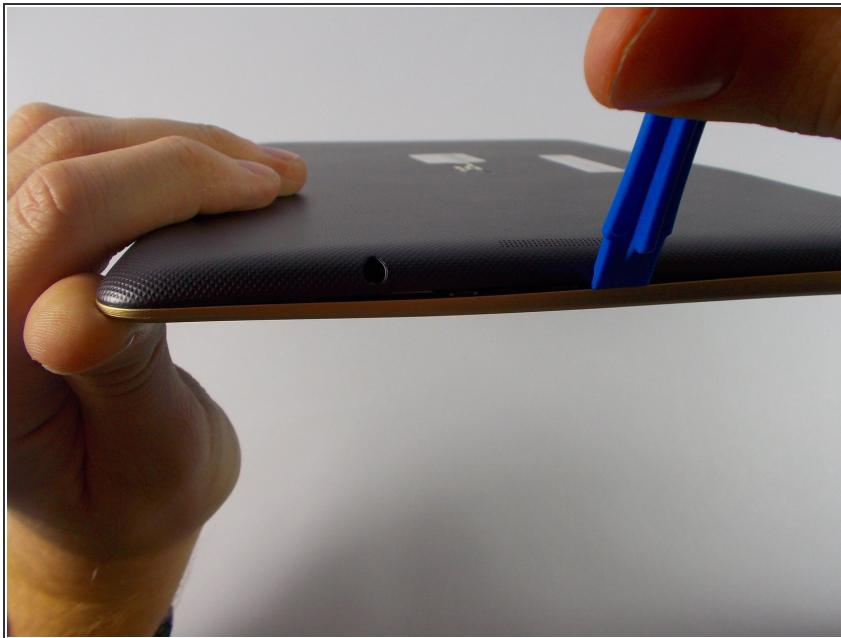

- Make sure power is off.
- Insert the plastic opening tool on the side of the tablet.

i You can use a thin screw if you don't have an opening tool.


- Gently pull upwards and carefully pry open the Transformer pad.

Step 2




- Slide the tool along all four edges and continue to pull the tool upwards.

Step 3

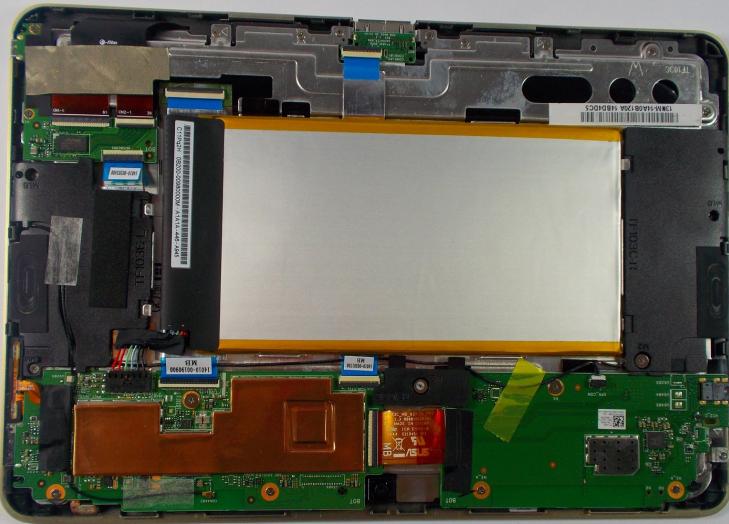


- Remove the back cover once it is detached and set it aside.
- Rotate tablet to match picture.

Step 4

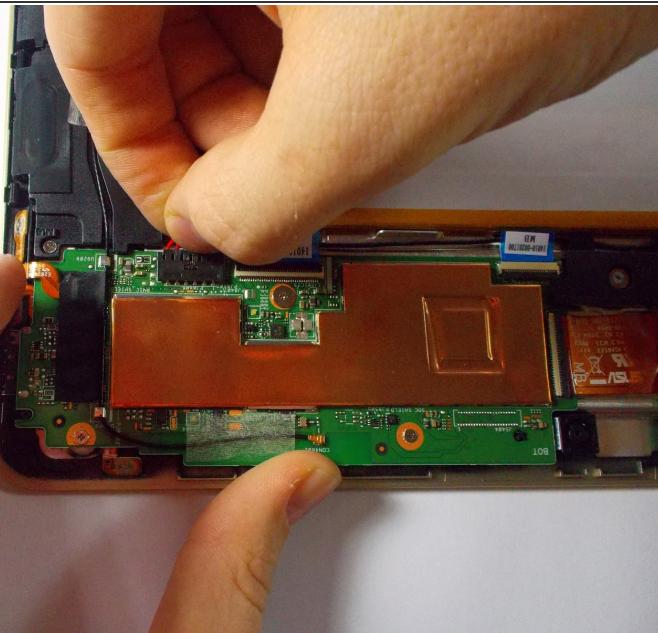



- Carefully unplug rainbow cable from motherboard.

Step 5

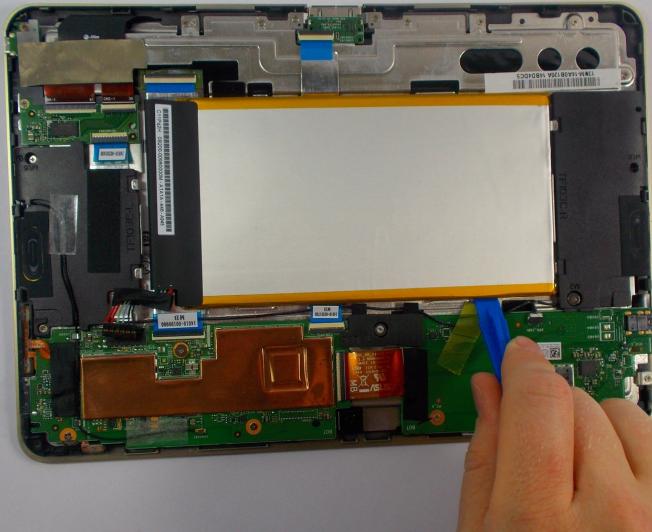


- Use plastic opening tool to carefully pry the battery out from frame.

Step 6

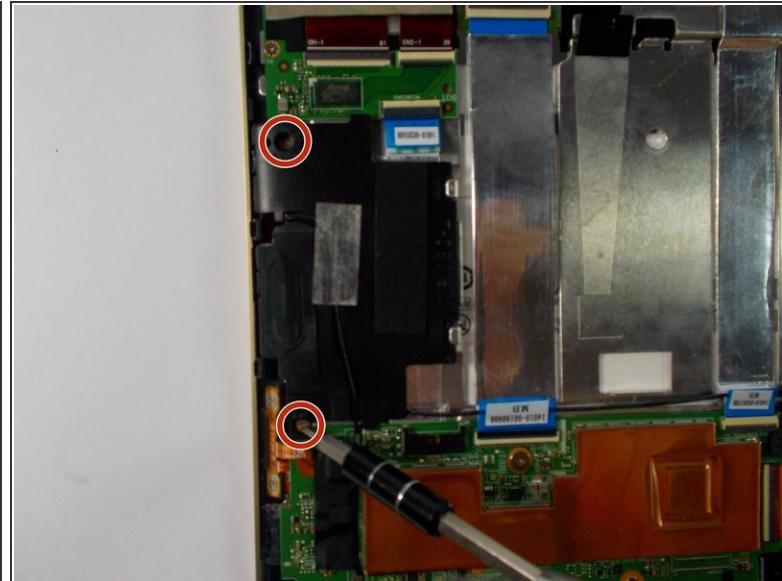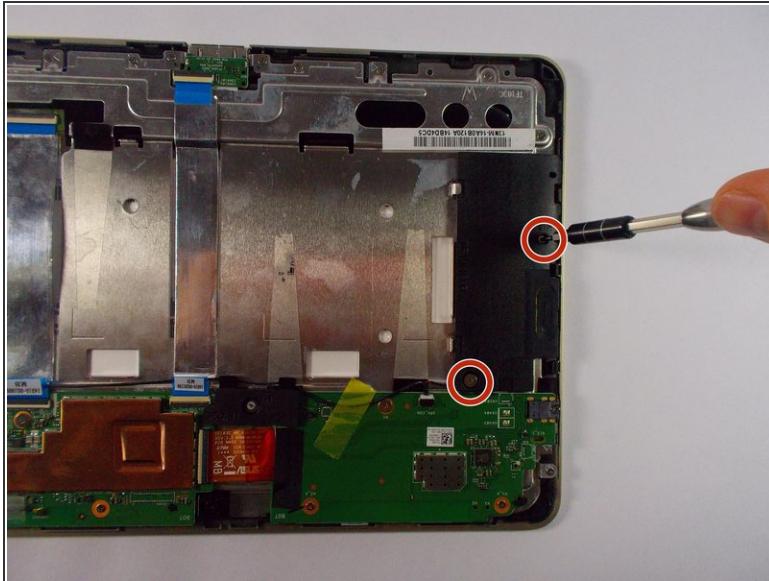

- Use the +J000 screwdriver to remove screws four from speakers.
- Keep the screws together and organized. (Label, if necessary).

Step 7

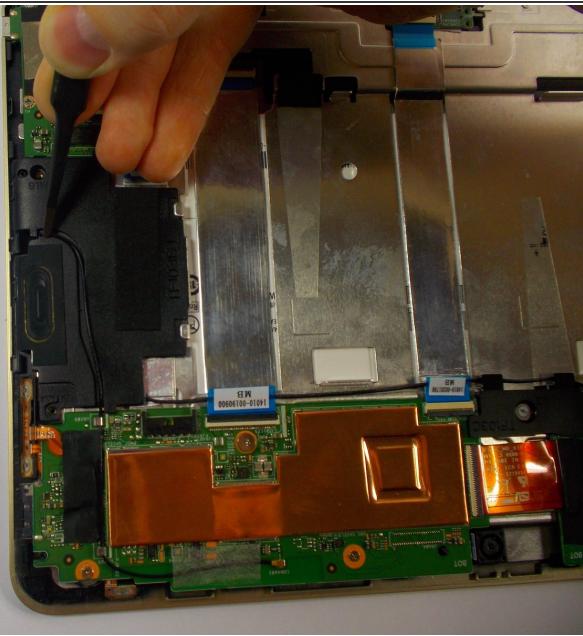


- Take ground wire out from the top of TF103C-L(Left) speaker.

 If you pull on the wire to much it will break off.



 if you break the wire off you can solder it back on

Step 8

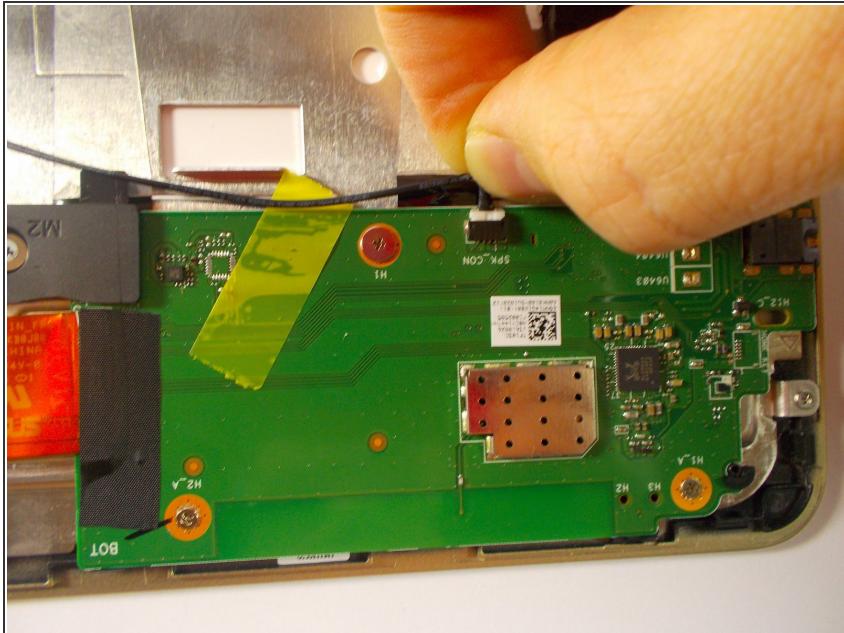

- Remove the tape and unplug wire that attaches to both speakers from soundboard.

Step 9

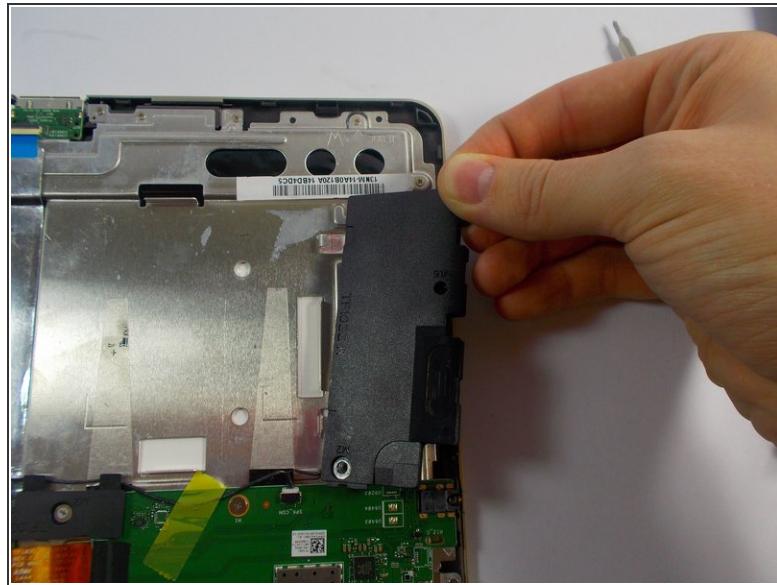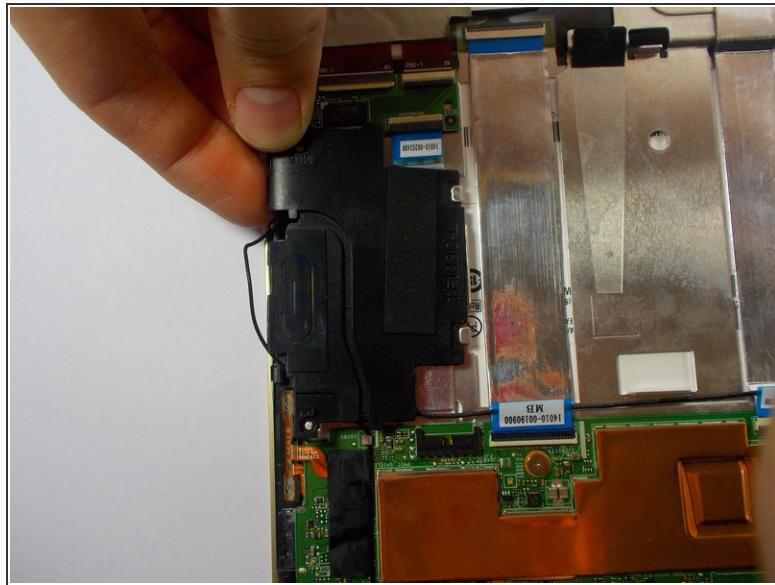

- Remove two speakers from frame.

To reassemble your device, follow these instructions in reverse order.