



# Asus V6800V Hard Drive Replacement

replacing hardware

Written By: Jong Park



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Hard Drive



- Remove the two highlighted screws.


## Step 2



- Pry open case at highlighted area.

*(i)* Actual hard drive is not shown in the image.

## Step 3

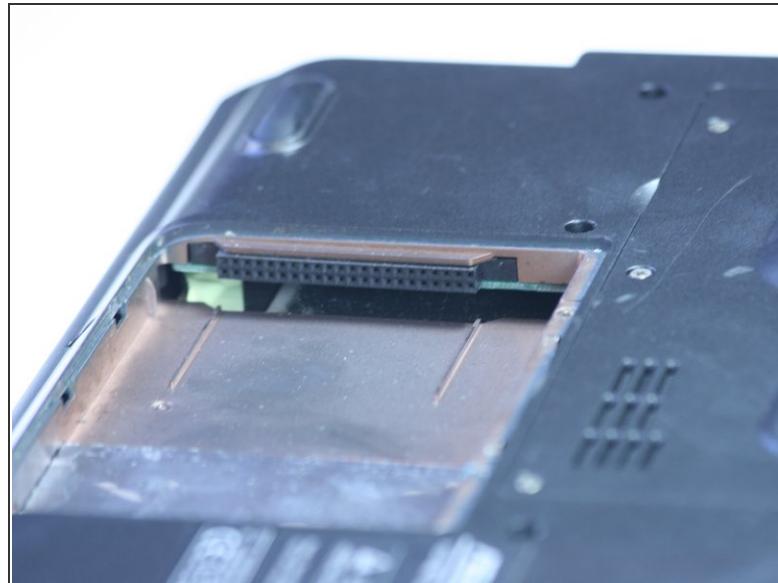

- Pull out hard drive laterally from slot shown.

To reassemble your device, follow these instructions in reverse order.