



# Asus VivoBook Q200E-BSI3T08 Display Replacement

This guide will show you how to locate and replace the display if experiencing display issues.

Written By: Mitchell Jackson



## INTRODUCTION

This guide will show you how to locate and replace the display if experiencing display issues.

### TOOLS:

- Phillips #0 Screwdriver (1)
- iFixit Opening Tools (1)
- Metal Spudger (1)

### PARTS:

- [ASUS VivoBook Q200E LCD](#) (1)

## Step 1 — Display



- First open the laptop and place it so that you have access to the side of the display.
- Next you want to place the laptop in a position where you have easy access to the display.
- Use a metal or a plastic prying tool to split the front and back of the display.
- Start on the side and work your way around.

## Step 2



- Pull the clear plastic display down from the bottom right and left.


*(i)* If pulled from the top you might crack the actual plastic.

## Step 3



- Remove the two 2.8mm screws on the top right and top left of the screen using a Phillips #0 screwdriver.

## Step 4

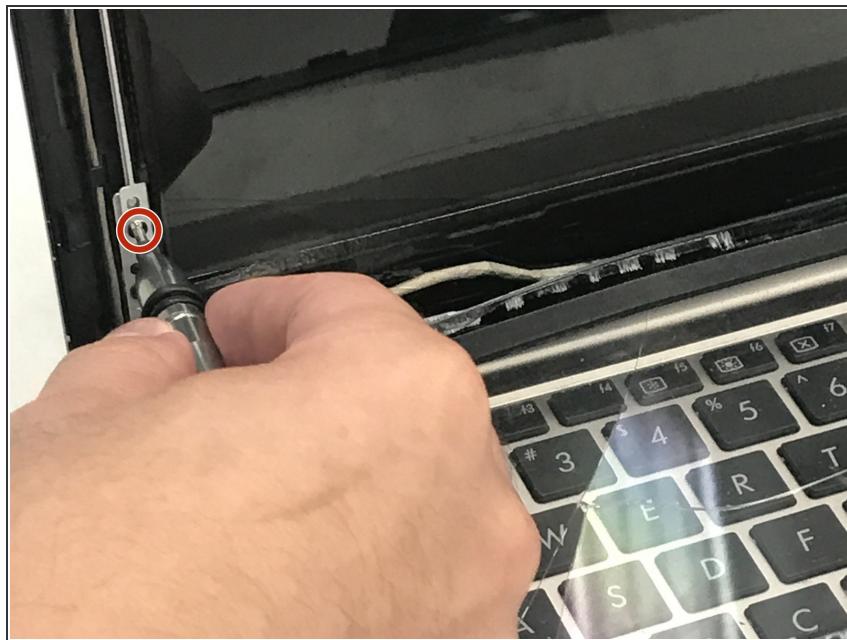

- Remove the two 2.8 screws on the bottom right and left using a Phillips #0 screwdriver.

## Step 5



- Once the screws are removed you should be able to move the display down. Be careful as there is a connection to the motherboard which will need to be removed.

## Step 6



- Here is a picture of the connection that needs to be removed to free the display.
- Pull connection from the plastic on the sides not the wires as these are fragile.

## Step 7



- Once this connection is removed here's what that should look.

## Step 8



- Remove display and place your new one in it's place.

To reassemble your device, follow these instructions in reverse order.