



# Asus Vivobook Q301LA-BHI5T02 Battery Replacement

How to remove the battery of this device and replace with a new one.

Written By: Nicholas De La Guardia



## INTRODUCTION

This guide well help the reader through the process of opening the device, removing the battery, then replacing it with a new one.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)

## Step 1 — Back Cover



- ⓘ Make sure the computer is turned off.
- Flip the device over so that the back cover is facing you.

## Step 2



- Remove the four 5mm Phillips #1 screws from the top of the laptop.
- Remove the two 6mm Phillips #1 screws from the sides of the laptop.
- Remove the four 2mm Phillips #1 screws from the bottom of the laptop.

## Step 3




- Use a plastic opening tool to gently pry the bottom of the laptop up. Slowly slide it along the edges, twisting it every so often to pop the bottom of the laptop out of the clips holding it in place.

## Step 4





- Lift off the cover and remove the back cover from the device.

## Step 5 — Battery

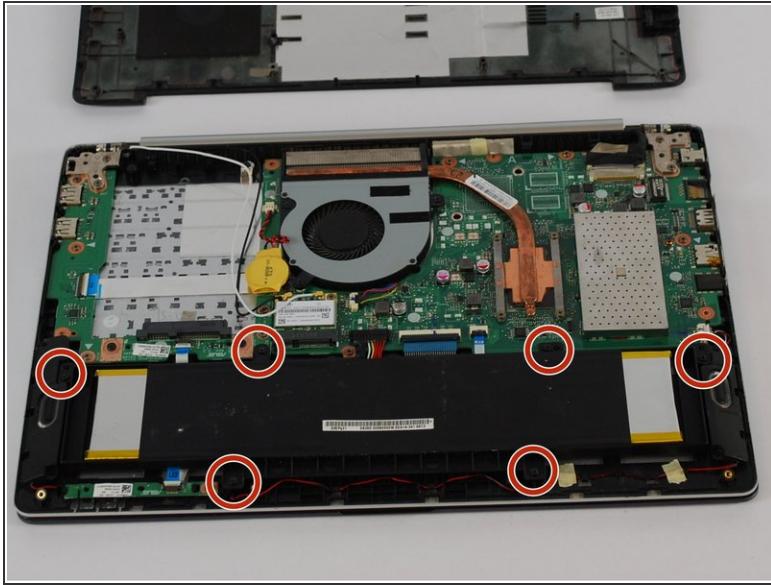


- Using a Phillips #1 Screwdriver remove the six 3 mm screws keeping the battery in place.

## Step 6

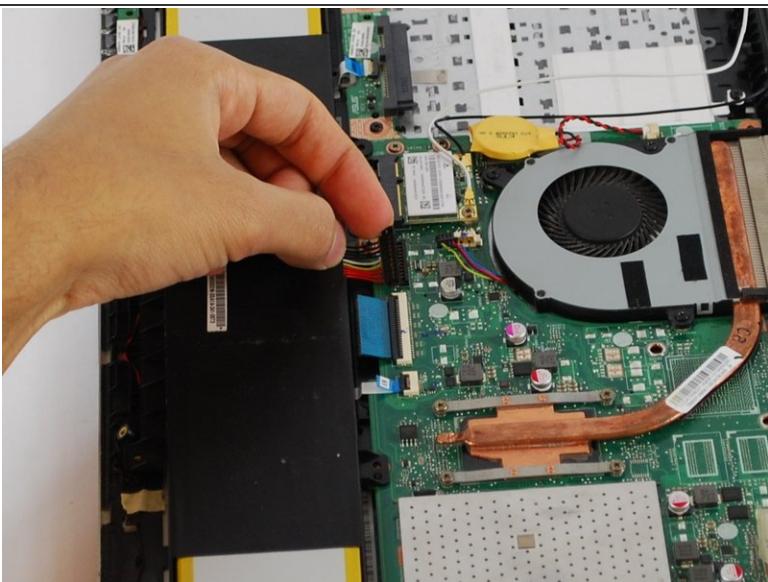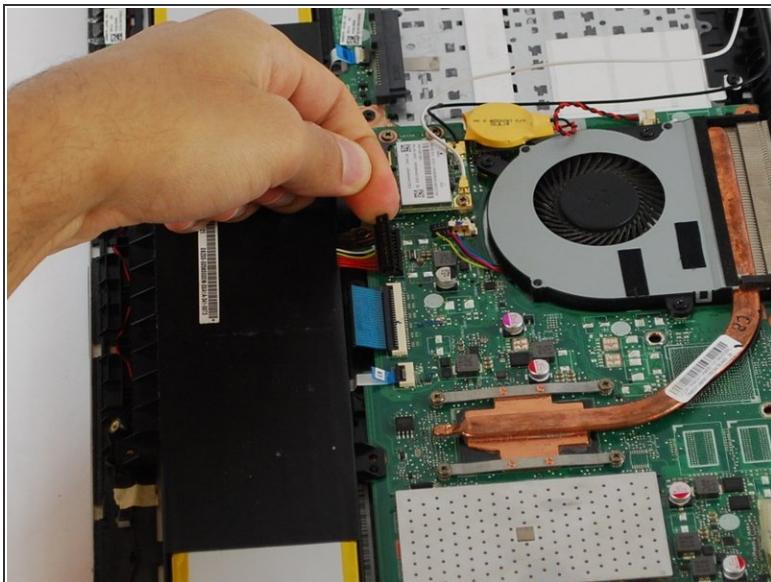

- Unplug the battery connector from the mother board.

## Step 7

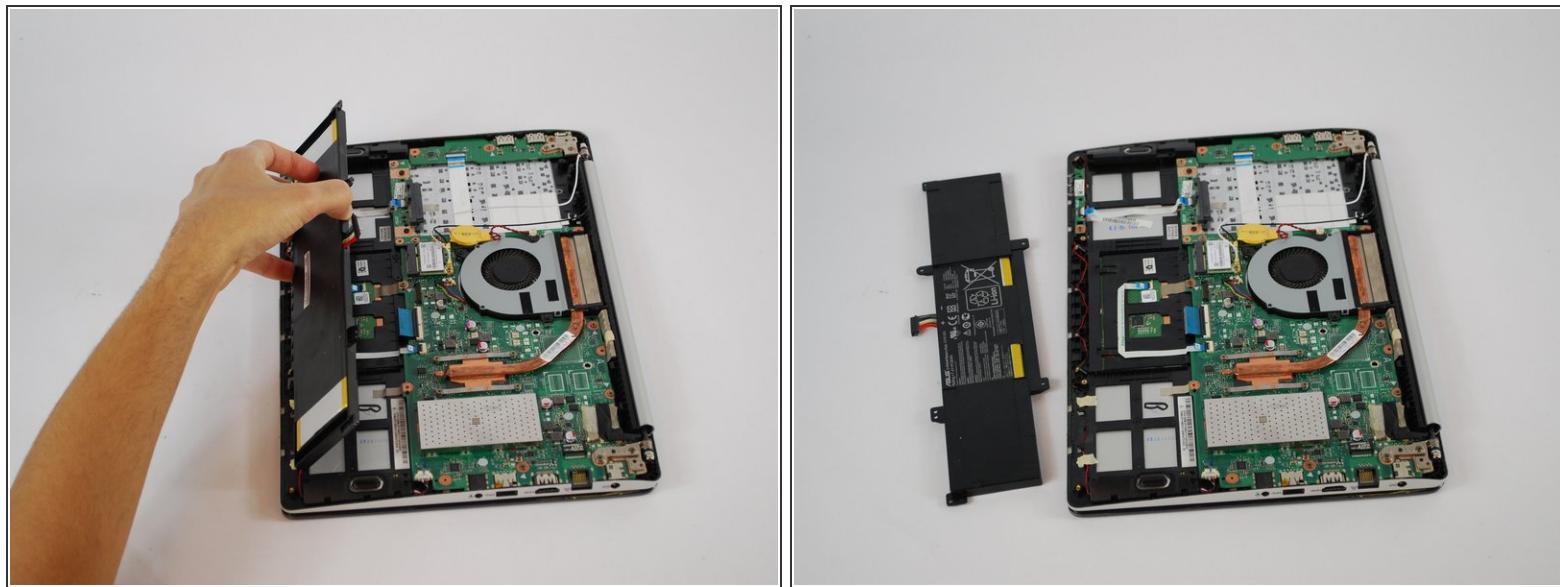

- Gently remove the battery from the slot.

To reassemble your device, follow these instructions in reverse order.