Asus X200MA Hard Drive Replacement

One more step and you're done.

Written By: Vanessa Garcia

This document was generated on 2019-12-27 01:35:22 AM (MST).
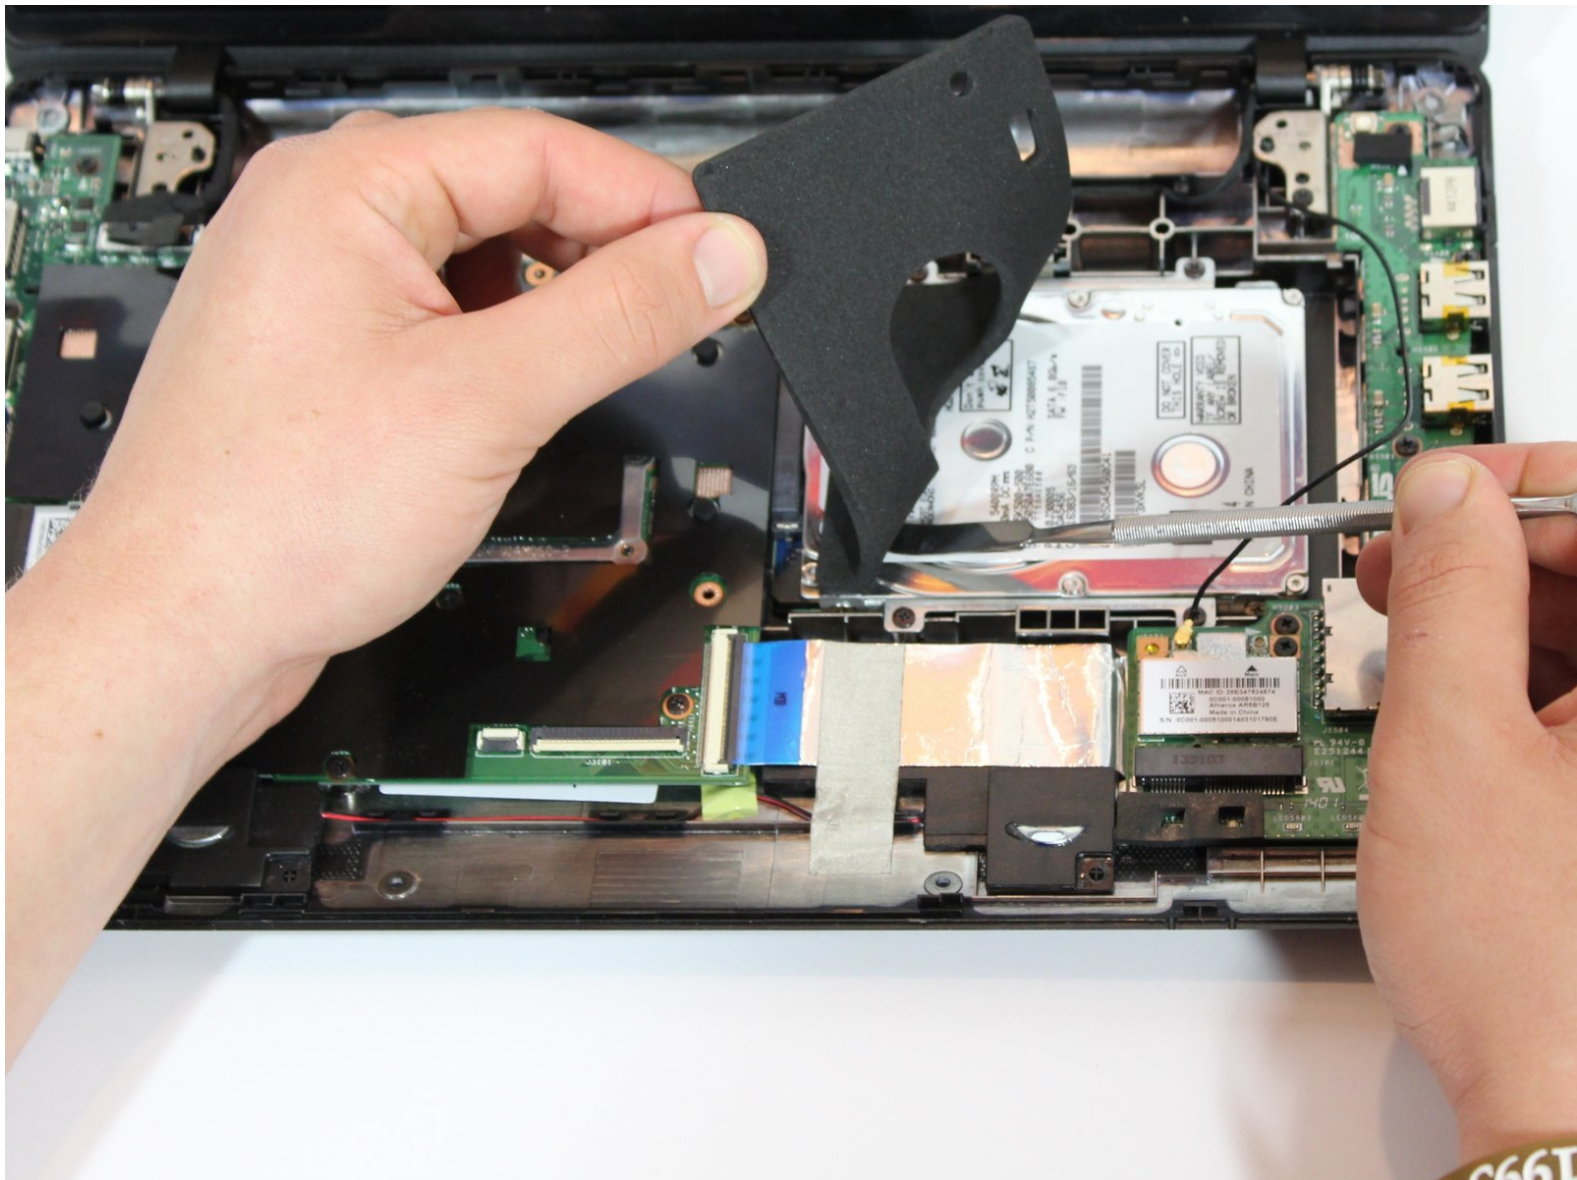
🔧 TOOLS:

- Spudger (1)
- Phillips #0 Screwdriver (1)
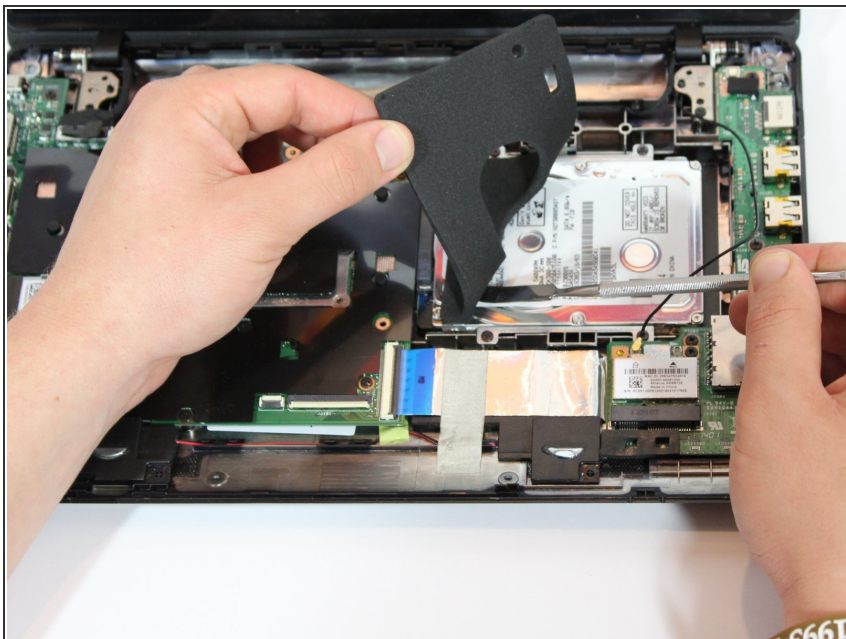
www.iFixit.com

Step 1 — Back Panel

- Remove the following six screws:
  - Six 4 mm screws using a Phillips #0 screwdriver.
- Remove the following one screw:
  - One 14 mm screw using a Phillips #0 screwdriver.
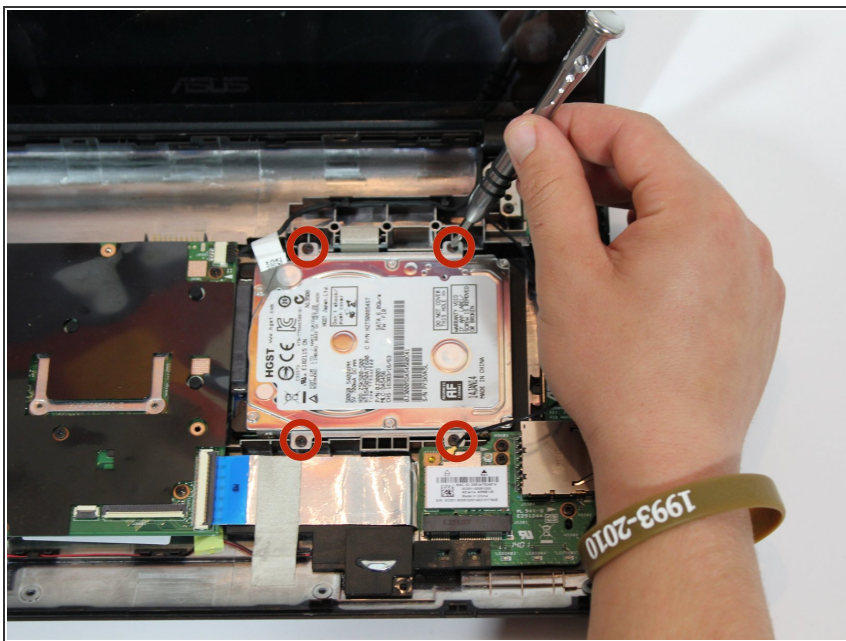- ⭐ The 14mm screw goes in the center.

Step 2

- Use a plastic or metal spudger to separate the keyboard from the back panel and lift the keyboard out of place.
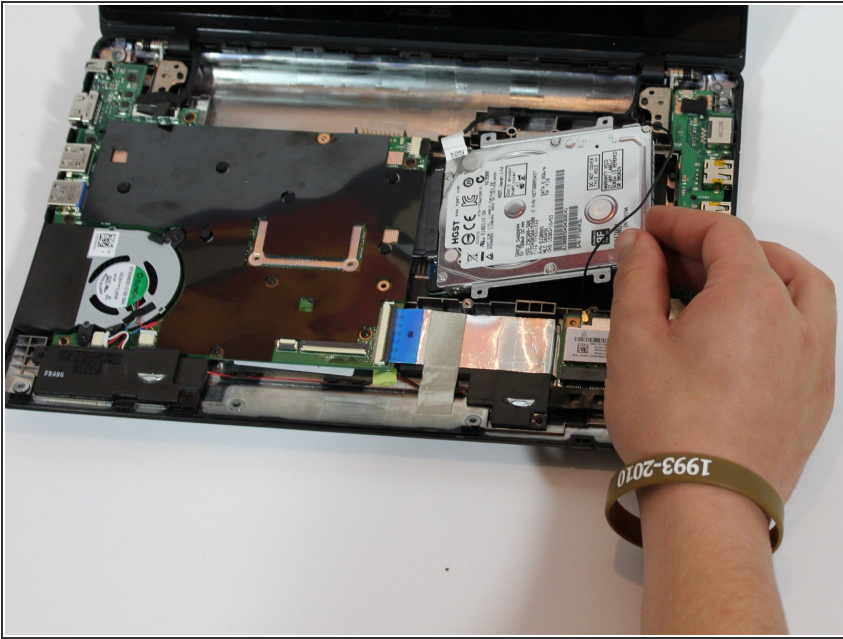
Step 3 — Hard Drive

- Remove the black foam and adhesive located on top of the hard drive.

Step 4

- Remove the following four screws:
  - Four 4 mm Phillips #0 using a phillips screwdriver.

This document was generated on 2019-12-27 01:35:22 AM (MST).

Step 5

- Slide out the hard drive

To reassemble your device, follow these instructions in reverse order.